





## Hose Replacement Service – 24h hour rapid response

Our 280 service vans from the hydraulic emergency service are always just a call away. Whether on the construction site, during the harvest or in industrial applications: in case of a machine failure the job is carried out on site – and around the clock.


Tel. 24/7: 0800 77 12345 (Int. +49 421 9897 7690)



## Industrial Service – maintain and optimise

Your machines must be running, around the clock. Preventative maintenance of the HANSA-FLEX Industrial Services helps you to save money and guarantees maximum machine uptime. We will advise you from the selection of the right hydraulic components to the optimisation of your plant and machinery.

[www.hansa-flex.com/en/industrial\\_service](http://www.hansa-flex.com/en/industrial_service)



## Power Unit Construction – engineering from the specialist

Units are the heart of any hydraulic system. In order to produce a state of the art power unit a high degree of engineering skill is required. The HANSA-FLEX power unit construction offers all services as a single source: from planning, design to installation and commissioning at the customer site.


[www.hansa-flex.com/en/unit\\_manufacture](http://www.hansa-flex.com/en/unit_manufacture)



## Online Shop – 24/7 convenient shopping

In our online shop you will find the same variety and quality of products that our customers have been used to for over 50 years: from hydraulic hoses and hose fittings to couplings, ball valves and cylinders – “everything from a single source.”

[www.hansa-flex.com/en/shop](http://www.hansa-flex.com/en/shop)



## X-CODE – hose management

Our customer portal My.HANSA-FLEX offers the perfect solution for preventative maintenance. Users can see the technical data of a hose line at a glance: Manufacturing date, period of use, proposed replacement date, as well as machine and location. Thus, inspection and maintenance intervals can be planned well ahead.

[www.hansa-flex.com/en/hose\\_line\\_management](http://www.hansa-flex.com/en/hose_line_management)







## HANSA-FLEX – always close to our customers

Through our tight-knit network of branches we are always close to our customers. At each of our 400 locations we offer the complete range of hydraulics: from the standard replacement of a hose line to powerful hydraulic cylinders – personal, fast and reliable.

[www.hansa-flex.com/en/subsidiaries](http://www.hansa-flex.com/en/subsidiaries)

## Metal Hoses

	Technical Information Page 4
	Hoses Page 18
	Hose fittings Page 46
	Subject Index / Index Page 94

# 1. Hoses

## Metal hoses



Metal hoses  
Page 20



PTFE hoses  
Page 27



Wound hoses  
Page 35



Coolant hoses  
Page 37



Expansion joints  
Page 38

## Hose protection



Heat protection  
Page 40



Abrasion protection  
Page 42

## 2. Hose fittings

### Metal hose connectors



Metric connectors  
Page 48



Imperial connectors  
Page 55



Pipe connectors  
Page 64



Fittings  
Page 67




Fittings for the food industry  
Page 77



Flange connections  
Page 80

T



## Technical Information

# 1. INSTRUCTION MANUAL FOR STORAGE, INSTALLATION, OPERATION & MAINTENANCE

Product description	
<b>Pressure equipment type:</b>	Stainless steel hose lines, PTFE hose lines in various versions (nominal sizes, lengths, materials, connection fittings etc.)
<b>Designation:</b>	In accordance with HANSA-FLEX nomenclature
<b>Marking (minimum scope):</b>	Manufacturer's marking (HF-IO)/ Manufacturing date (MM, YYYY)
<b>Use:</b>	Only as intended !

## 1.1 GENERAL

The hose lines are designed for the prevailing operating conditions. They are manufactured by expert personnel using proven and approved manufacturing methods. The hose lines undergo a final inspection, including a leak and/or pressure test. The hose lines are marked with the most important information. The hose lines comply with "sound engineering practice" according to Article 3 Section 3 of the Pressure Equipment Directive 97/23/EC or the standards specified in the order.

## 1.2 STORAGE

Adequate protection against damage, contamination, the weather etc. must be provided. The effects of chlorides, bromides, iodides, and extraneous and film rust must be avoided. Hose lines must be stored in a dry, strain-free and kink-free state. When stored wound up, the radius of the hose line must not be less than the minimum static bending radius.

Assuming the correct storage conditions, there are no restrictions on storage time for metal and PTFE hose lines with braiding and fittings made from chromium-nickel stainless steel. In the case of zinc-coated or painted steel fittings, storage time depends largely on the storage conditions and is usually limited.

## 1.3 INSTALLATION

- Hose lines may be assembled and installed only by appropriately qualified personnel.
- The guidelines for handling and fitting HANSA-FLEX hose lines must be observed. Some important points in the guidelines are highlighted below:
- No axial loads (tension or compressive buckling)
- No torsional loads (to avoid torsional loads, the longitudinal axis of the hose and the direction of motion must lie in the same plane).
- The minimum static and dynamic bending radius in accordance with the datasheet or with the information on the drawing must be observed.
- Check any separable connections for proper seating before commissioning.
- Damaged hose lines must not be installed or commissioned.
- Cover the hose lines to protect them against weld splatter and grinding dust when working on the equipment.

## 1.4 COMMISSIONING/ OPERATION

During commissioning and operation, the permissible limiting values (pressure, temperature, bending radii, medium concentration) must be observed. The hose lines may be used only in accordance with the designer's intention (intended pressure, temperature, medium, movement). Where flowing media are used, the lines must be bled of air during filling. Because of their compressibility, any gaseous fluids remaining in the lines represent a serious hazard and could potentially lead to a higher classification and stricter requirements becoming applicable to the product.

The resistance of the materials the medium flows through must be checked for the specific medium used. A definitive statement of the resistance of hose lines can normally be gained only by practical experience of opera-

tion. Incrustations in the medium flowing through the products can lead to corrosion damage. Incrustations also reduce the flexibility of the hose lines and lead to premature failure. A safety datasheet for the medium must be kept available.

In situations with high operating temperatures, the high thermal conductivity of metallic materials means there is a risk of burns if the hose line is touched. The appropriate measures must be put in place (protection against contact, warning notices, barriers). Safety measures against whipping hose lines must also be in place. Electrically conductive materials and adequate equipotential wiring or earthing must be used where there is risk of electrostatic discharge (PTFE hoses). The movement of the hoses must not be restricted, otherwise there is the risk of abrasive wear.

Hose lines must always be installed and operated in such a way that they present no danger to people or the environment. Protective measures must be put in place against any remaining unmitigated hazards. Technical and organisational measures for the safe use of hose lines are described in Information Sheet T 002 published by BG Chemie.

### 1.5 MAINTENANCE

The intervals for external and internal inspections must be determined taking into account the load and the degree of danger. A qualified person must check to see that the item is safe to use at work and must record the findings. Hose lines with damaged braiding must be replaced immediately. Repairs to rectify leaks on hose lines or at connections by welding, wrapping etc. are not permitted. Damage caused by mechanical cleaning, use of unsuitable cleaning materials etc. must be avoided.

## 2. INSTALLATION REQUIREMENTS FOR METAL AND PTFE HOSE LINES

The following provisions must be observed in order to ensure correct handling and installation of HANSA-FLEX metal and PTFE hose lines:

### 2.1 CORRECT ROLLING UP AND ROLLING OUT


Pulling on the ends of rolled-out hose lines must be avoided in order not to subject them to damaging torsional loads. In addition, the radius of the hose line must not be smaller than its smallest permissible bending radius. These mistakes can be avoided by rolling up and rolling out the hose lines correctly.






## 2.2 CORRECT LENGTH

If the length of the hose is too short, hose lines become kinked at the connection points. A straight length of at least  $1 \times DN$  per connection point must be added to the length calculated from the bending radius.

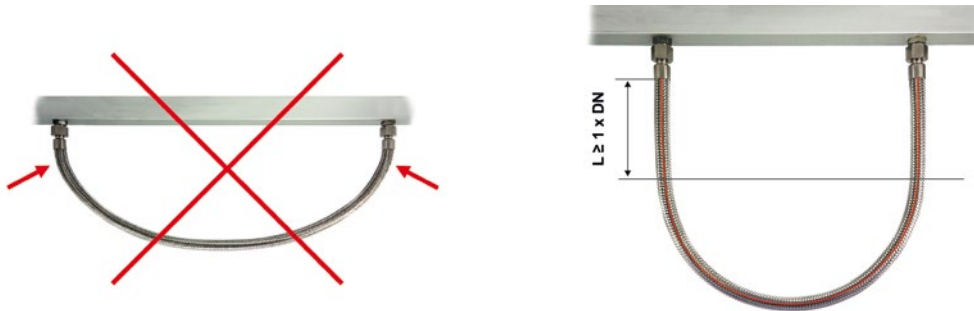

## 2.3 APPROPRIATE BENDING

The incorrect installation of hose lines can lead to excessive bending of the hose lines at the connections. This mistake can be avoided by the use of pipe bends.

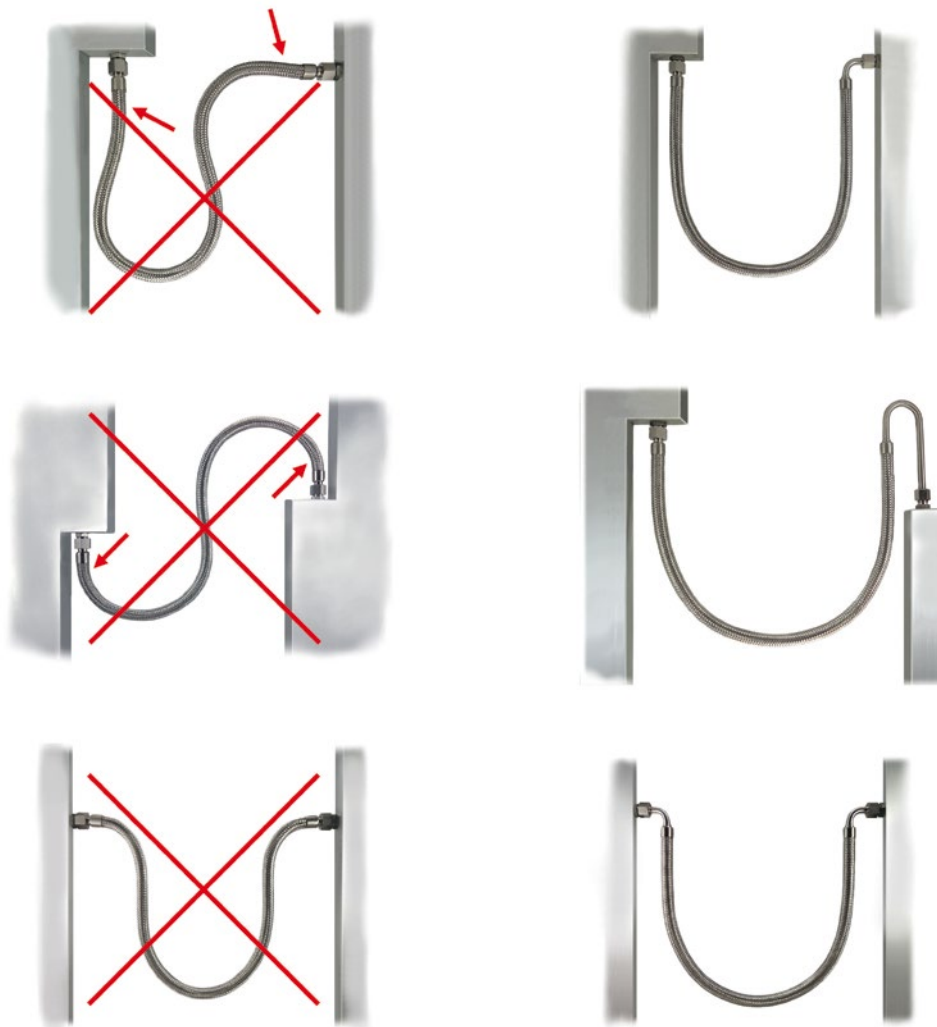

## 2.4 PREVENTION OF KINKS


Laying the hose line over a saddle or a roller of the appropriate diameter prevents the hose line from kinking.

T




## 2.5 PREVENTION OF BUCKLING

Incorrect installation can lead to compression of the hose on its longitudinal axis. This mistake can occur as a result of poor installation or the movement of the hose line and leads to the braiding separating from the hose. Once this happens, the pressure resistance of the hose cannot be guaranteed. Hose lines with braiding are therefore not suitable as a means of compensating for axial expansion. Axial expansion can be accommodated by hose lines installed in a U-shape.

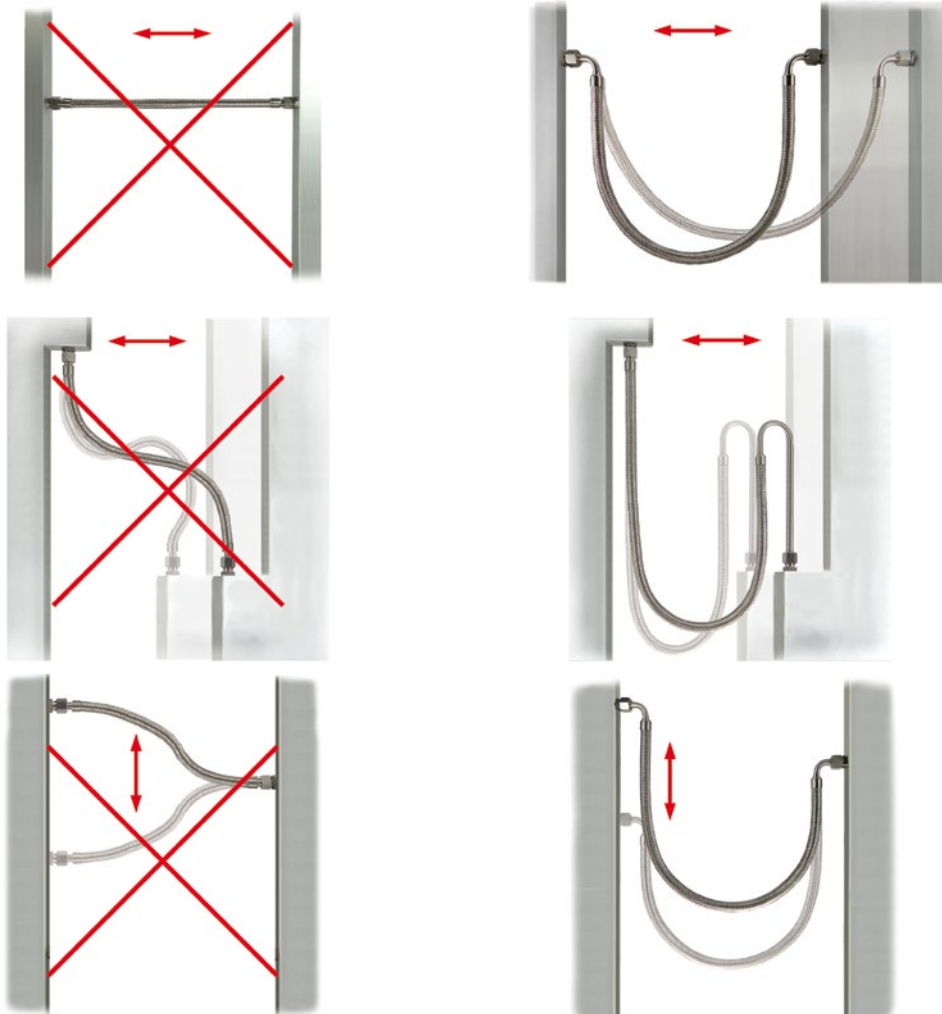


## 2.6 TORSIONAL MOVEMENT

The greatest mistake during installation is to end up with the hose line twisting during operation. Torsional movement leads to early failure of the hose line. Ensure that the pipe and hose axes and the direction of movement lie in the same plane.

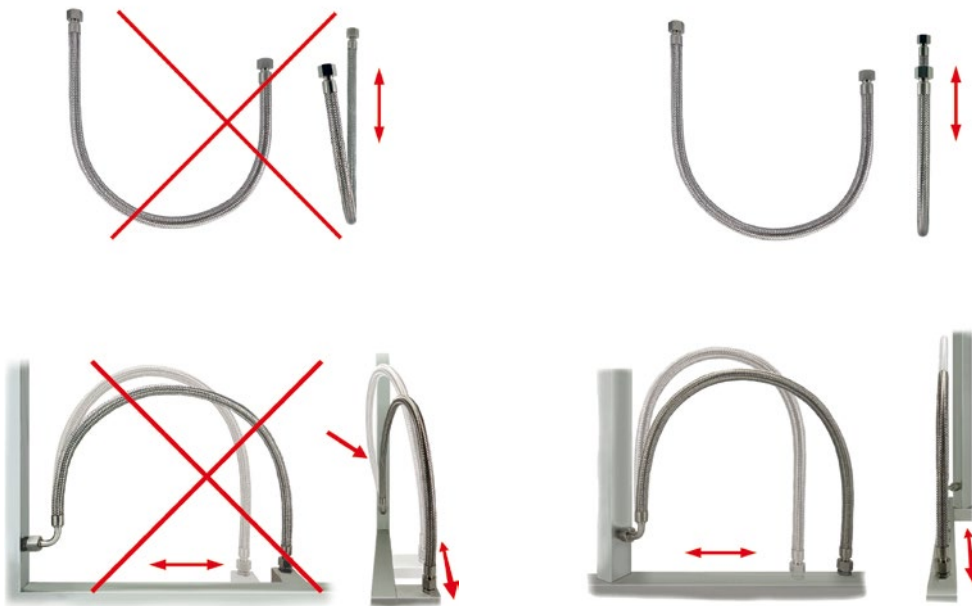

During installation, the hose line must be held with a second spanner. This ensures that the hose line cannot be subjected to torsion during installation.

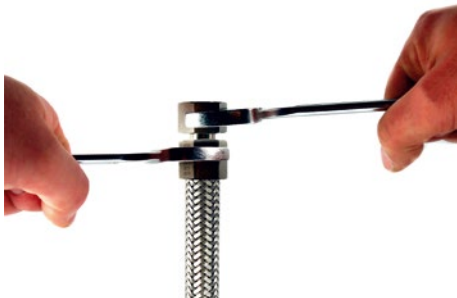

### 3. REDUCTION FACTORS FOR METAL HOSES

#### 3.1 DYNAMIC REDUCTION

Table of dynamic reduction factors  $k_d$ :

Movement / flow	No vibration, slight, slow movement	Slight vibration, frequent, uniform movement	Significant vibration with continuous movement
Static or uniform flow	1.00	0.82	0.40
Pulsating and dynamic flow	0.80	0.65	0.33
Rhythmic and intermittent flow	0.40	0.35	0.15
Highly intermittent flow	0.30	0.20	0.10

#### 3.2 THERMAL REDUCTION

Table of thermal reduction factors  $k_t$ :

Operating temp. °C	Machining steel	----- Stainless steels -----				
	9SMnPb28K	Steel Mat. 1.0460	Mat. 1.4301	Mat. 1.4404	Mat. 1.4541	Mat. 1.4571
20		1.00	1.00	1.00	1.00	1.00
50		1.00	0.90	0.90	0.93	0.92
100	In acc. with DIN 3859-1 up to max. 120 °C, manufacturer- dependent up to 200 °C, reduc- tion subject to separate request	0.95	0.73	0.73	0.83	0.80
150		0.86	0.66	0.67	0.78	0.76
200		0.76	0.60	0.61	0.74	0.72
250		0.68	0.55	0.58	0.70	0.68
300		0.60	0.51	0.53	0.66	0.64
350		0.52	0.49	0.51	0.64	0.62
400		0.44	0.48	0.50	0.62	0.60
450	0.36	0.46	0.49	0.60	0.59	
500	---	---	0.46	0.47	0.59	0.58
550	---	---	0.46	0.47	0.58	0.58

## 4. DESIGN OF METAL AND PTFE HOSE LINES

### 4.1 GENERAL

Ensuring the safety of hose lines requires knowledge of the operating conditions and field of application. This information leads to the design, manufacture, marking, testing and documentation being appropriate for the application.

The load capacity of hose lines depends on the components and methods used. The “weakest” component of the hose line determines the nominal pressure  $P_N$  of the hose line. The nominal pressure is valid at 20 °C and under static loading. The maximum permissible operating temperature depends on the materials used.

The nominal pressures of the components are reduced, depending on the operating conditions, by thermal or dynamic factors. The nominal values of the components, reduction factors etc. can be found in the associated technical datasheets.

The bursting pressure for metallic hose lines equals 4 times the highest permissible pressure  $P_N$  at room temperature. The bursting pressure for PTFE hose lines equals 3 or 4 times the highest permissible pressure  $P_N$  at room temperature.

If no acceptance test (pressure test) is specified, HANSA-FLEX AG performs a standard leak test on metal and PTFE hose lines at approximately 8 bar compressed air under water. Documented pressure tests are performed in accordance with official regulations, guidelines, prescriptions, standards, technical rules, customer requirements etc. The test pressure lies normally in a range of 1.1 to 2.2 times the operating pressure. In the tests, the limits of use of all the components must also be observed!

The nominal bending radii are adjusted in a similar way to the reduction of the nominal operating pressure. The permissible maximum pressures and minimum bending radii for a specific operating scenario are calculated as follows:


### 4.2 CALCULATION OF OPERATING PRESSURE AND BENDING RADIUS

The permissible operating pressure is:

$$P_U = P_N \cdot k_t \cdot k_d$$

The permissible bending radius is:

$$R_d = \frac{R_N}{2.8} \left( 1.1 + \frac{P_U}{P_N} + \frac{1}{k_d} + \frac{1}{k_t} \right)$$

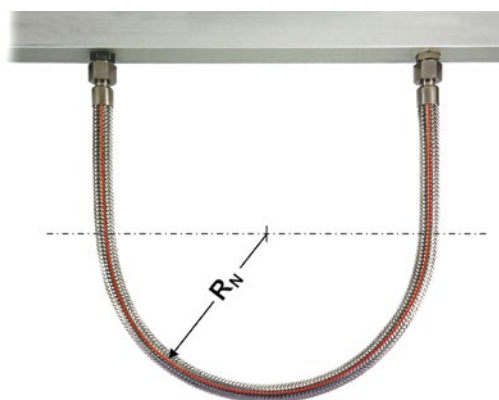

$P_U$  = permissible operating pressure in bar

$P_N$  = nominal pressure in accordance with table in bar

$k_d$  = dynamic reduction factor

$k_t$  = thermal reduction factor

$R_d$  = bending radius for frequent bending

$R_N$  = nominal bending radius for frequent bending


## 5. ACCOMMODATION OF THERMAL EXPANSION FOR METAL HOSE LINES

Components expand when heated and contract again when cooled.


Pipelines where high temperatures can prevail in addition to high pressures place increased requirements on flexible intermediate members (e.g. metal hoses). The expansion caused by heat has to be accommodated. It is essential to ensure that metal hoses are not axially loaded or buckled. The hose must be installed if possible as a 180° U-bend in order to accommodate a large axial expansion.

↔: shows the movement of the hose line caused by thermal expansion of the components. What is not meant here is movement caused by the operating system itself!

### 5.1 ACCOMMODATING AXIAL EXPANSION

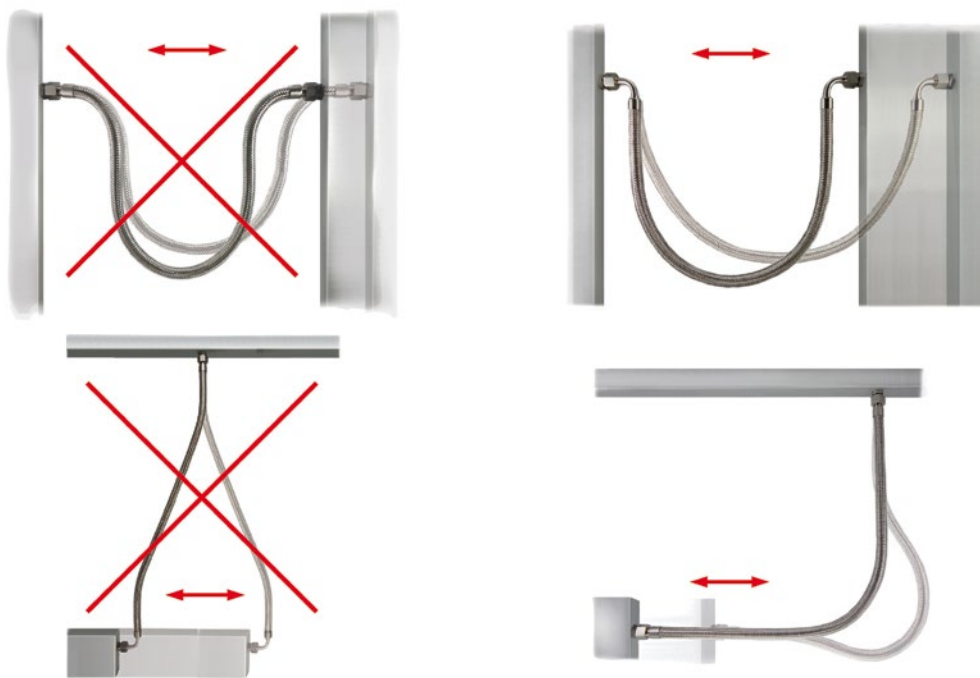


### 5.2 ACCOMMODATING LATERAL EXPANSION

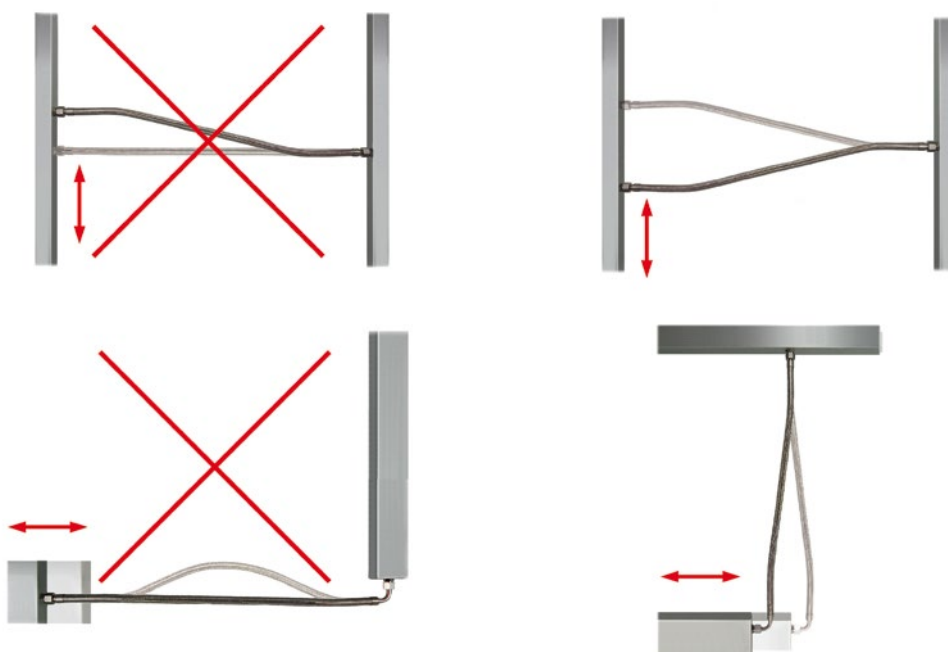

## 6. FB... METAL HOSE LINES FOR THE FOOD AND CHEMICAL INDUSTRIES


### 6.1 TECHNICAL DATA

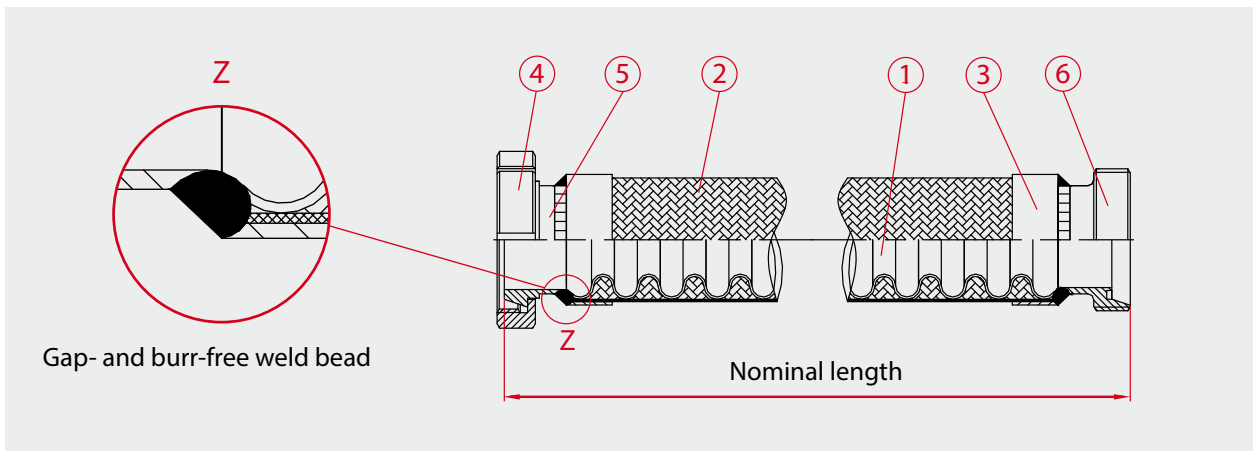

#### Based on DIN 2827

- ① HANSA-FLEX annular corrugated hose FBA ..... Material 1.4404
- ② Braiding ..... Material 1.4301
- ③ End sleeves ..... Material 1.4301
- ④ DIN 11851 screw connection (other connections available)..... Material 1.4404
- ⑤ Threaded element DIN 11851 screw connection (other connections available).. Material 1.4404

### 6.2 THE CRITICAL DIFFERENCE IN THE HANSA-FLEX FB... ANNULAR CORRUGATED HOSE

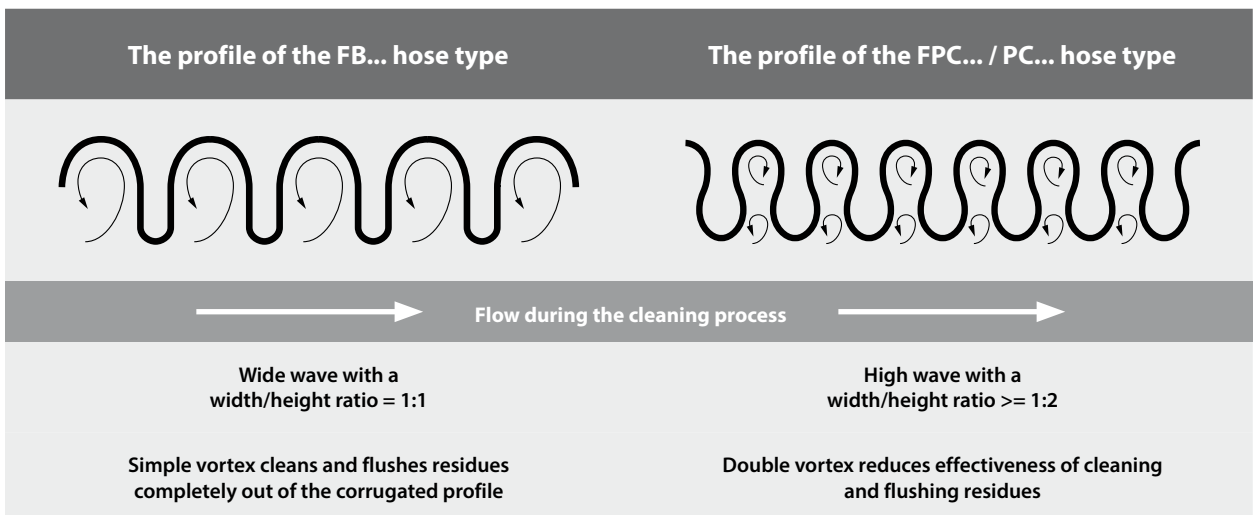

## Questionnaire Choice of Expansion Joints

OFFER                                       CUST Offer No.: \_\_\_\_\_ Date: \_\_\_\_\_  
 ORDER                                         CUST Order No.: \_\_\_\_\_

**CUSTOMER NO.:** \_\_\_\_\_ Tel.: \_\_\_\_\_  
 Company: \_\_\_\_\_ City: \_\_\_\_\_ Fax: \_\_\_\_\_  
 Contact person: \_\_\_\_\_ e-mail: \_\_\_\_\_

### TO BE FILLED OUT BY HANSA-FLEX

Accepted on: \_\_\_\_\_ By Ms/Mr: \_\_\_\_\_ Tel.: \_\_\_\_\_  
 To be processed by (date): \_\_\_\_\_ e-mail: \_\_\_\_\_

Intended purpose: \_\_\_\_\_ Quantity: \_\_\_\_\_

### TECHNICAL INFORMATION – EXPANSION JOINT

Nominal width (mm)	_____
Total length measured over all (mm)	_____
Type of connections	_____
Pumping medium	_____
Internal pressure value (bar pressure)	_____
External pressure value (bar pressure)	_____
Bending radius (mm)	_____
Pumping medium temperature (°C)	_____
Ambient temperature (°C)	_____

### Movement load

Axial +/-		_____
Angular +/-		_____
Lateral +/-		_____
Frequency of movement	_____	
Ind. service life (number of load cycles)	_____	
Flow velocity (m/s)	_____	
Flow rate (m <sup>3</sup> /h)	_____	

### EXTERNAL INFLUENCES:

### INSTALLATION / USE:

### SPECIAL REQUIREMENTS:

Material of the	_____
Bellows	_____
Inner guide pipe	_____
Connections	_____

### General comments

\_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

**Dispatch by**                                       Courier    Night delivery    Mail / post    Freight company    Truck load

**Dispatch to**  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

Date: \_\_\_\_\_ Signature: \_\_\_\_\_

Name in BLOCK CAPITALS: \_\_\_\_\_



**Questionnaire Choice of Hose Lines (Page 1 of 2)**

OFFER                                       CUST Offer No.: \_\_\_\_\_ Date: \_\_\_\_\_  
 ORDER                                          CUST Order No.: \_\_\_\_\_

**CUSTOMER NO.:** \_\_\_\_\_ Tel.: \_\_\_\_\_  
 Company: \_\_\_\_\_ City: \_\_\_\_\_ Fax: \_\_\_\_\_  
 Contact person: \_\_\_\_\_ e-mail: \_\_\_\_\_

**TO BE FILLED OUT BY HANSA-FLEX**

Accepted on: \_\_\_\_\_ By Ms/Mr: \_\_\_\_\_ Tel.: \_\_\_\_\_  
 To be processed by (date): \_\_\_\_\_ e-mail: \_\_\_\_\_

Intended purpose: \_\_\_\_\_ Quantity: \_\_\_\_\_

**TECHNICAL INFORMATION – HOSE LINE**

Please enter the technical information

Nominal width (mm)	_____
Total length measured over all (mm)	_____
Connection 1	_____
Connection 2	_____

**MATERIAL**

Please enter the applicable material of the

Hose	_____
Braiding	_____
Connections	_____
Hose protector	_____

**OPERATING CONDITIONS**

Please enter the operating conditions

Operating pressure, constant (bar)	_____
Operating pressure, intermittent (bar)	_____
Test pressure (bar)	_____
Temperature, constant (°C)	_____
Temperature, fluctuating (°C), from-to	_____
Flow medium*	_____
*for acidic concentrations	_____

**MECHANICAL INFLUENCES:** \_\_\_\_\_

**CORROSIVE INFLUENCES:** \_\_\_\_\_



## Questionnaire Choice of Hose Lines (Page 2 of 2)

### WHAT MOVEMENTS MUST BE ACCOMMODATED BY THE HOSE?

**BENDING RADIUS (mm):** \_\_\_\_\_

**LOAD CYCLE (mm):** \_\_\_\_\_

Please provide a sketch of the installation situation

### MOVEMENT TYPE

Please select the corresponding movement type

- No vibration, slight, slow movement
- Slight vibration, uniform movement
- Significant vibration with rhythmic continuous movement

### ADDITIONAL SERVICES

- Pressure test
- Helium leak test
- Flushing and cleaning
- Special embossing

### APPROVALS

CE, DNV GL, GSI SLV, DVGW, DB etc.

General comments

\_\_\_\_\_  
\_\_\_\_\_

**Dispatch by**

- Courier
- Night delivery
- Mail / post
- Freight company
- Truck load

**Dispatch to**

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

Date: \_\_\_\_\_ Signature: \_\_\_\_\_


Name in BLOCK CAPITALS: \_\_\_\_\_





# Hoses

<b>Metal hoses</b>	
Metal hoses	20
PTFE hoses	27
Wound hoses	35
Coolant hoses	37
Expansion joints	38
<b>Hose protection</b>	
Heat protection	40
Abrasion protection	42

**KBO****Metal hose**

<b>Application:</b>	Standard hose for a wide range of applications
<b>Design:</b>	parallel corrugation, single wall, flat corrugation
<b>Properties:</b>	The related material ensures good resistance to corrosion suitable for use with aggressive media
<b>Hose material:</b>	Stainless steel 1.4404
<b>Braiding:</b>	without braiding
<b>Standard:</b>	DIN EN ISO 10380
<b>Temp. min.:</b>	-200 °C
<b>Temp. max.:</b>	550 °C
<b>Temp.:</b>	applies for the hose only

**Note:** Please take into account the dynamic and thermal reduction factors with respect to the pressure values. The pressure values listed apply to hoses only.


**Ordering information:** Other designs available on request

Identification	Ø ID	Ø AD	Tolerances of ID/ED mm	bend radius stat. mm	bend radius dyn. mm	OP at 20°C (stat.) bar	Weight per m kg	Production length (m)
	mm	mm						
KBO 006	6,10	9,80	0,20	15	80	18,0	0,072	10 to 100
KBO 008	8,20	12,30	0,20	16	125	13,0	0,086	10 to 100
KBO 010	10,05	14,30	0,20	18	129	6,0	0,101	10 to 100
KBO 013	12,20	16,70	0,20	20	140	6,0	0,116	10 to 100
KBO 016	16,20	21,60	0,20	28	160	5,0	0,176	10 to 100
KBO 020	20,20	26,80	0,20	32	170	3,0	0,252	10 to 100
KBO 025	25,40	32,20	0,30	40	190	2,5	0,336	10 to 100
KBO 032	34,30	41,10	0,30	50	260	2,0	0,428	10 to 100
KBO 040	40,00	49,80	0,30	60	300	2,0	0,706	10 to 100
KBO 050	50,20	60,30	0,40	70	320	0,5	0,894	10 to 100

**Web:** <http://cat.hansa-flex.com/en/KBO>

**Product versions:**

**KBA** - Metal hose, 1 braiding with 1.4301

**KBA****Metal hose**

<b>Application:</b>	Standard hose for a wide range of applications
<b>Design:</b>	parallel corrugation, single wall, flat corrugation
<b>Properties:</b>	The related material ensures good resistance to corrosion suitable for use with aggressive media
<b>Hose material:</b>	Stainless steel 1.4404
<b>Braiding:</b>	1 braiding with 1.4301
<b>Standard:</b>	DIN EN ISO 10380
<b>Temp. min.:</b>	-200 °C
<b>Temp. max.:</b>	550 °C
<b>Temp.:</b>	applies for the hose only
<b>Approval:</b>	DVGW W543 Water approval up to NW 32

**Note:** Please take into account the dynamic and thermal reduction factors with respect to the pressure values. The pressure values listed apply to hoses only.

**Ordering information:** Other designs available on request

Identification	Ø ID	Ø AD	Tolerances of ID/ED mm	bend radius stat. mm	bend radius dyn. mm	OP at 20°C (stat.) bar	Weight per m kg	Production length (m)
	mm	mm						
KBA 006	6,10	10,70	0,20	25	80	100,0	0,120	10 to 100
KBA 008	8,20	13,60	0,20	32	125	100,0	0,208	10 to 100
KBA 010	10,05	15,50	0,20	38	129	100,0	0,216	10 to 100
KBA 013	12,25	18,30	0,20	45	140	65,0	0,258	10 to 100
KBA 016	16,20	23,80	0,20	58	160	64,0	0,380	10 to 100
KBA 020	20,20	28,60	0,30	70	170	43,0	0,504	10 to 100
KBA 025	25,40	34,30	0,30	85	190	49,0	0,694	10 to 100
KBA 032	34,30	43,00	0,30	105	260	35,0	1,030	10 to 100
KBA 040	40,00	52,00	0,30	130	300	38,0	1,348	10 to 100
KBA 050	50,20	62,40	0,40	160	320	25,0	1,604	10 to 100

**Web:** <http://cat.hansa-flex.com/en/KBA>


**Product versions:**

**KBO** - Metal hose, without braiding

ICO

## Metal hose

<b>Application:</b>	Well suited for use in gas technology
<b>Design:</b>	parallel corrugation, single wall, normal corrugation
<b>Hose material:</b>	Stainless steel 1.4541
<b>Braiding:</b>	without braiding
<b>Standard:</b>	DIN EN ISO 10380
<b>Temp. min.:</b>	-200 °C
<b>Temp. max.:</b>	550 °C
<b>Temp.:</b>	applies for the hose only
<b>Approval:</b>	Approval for all gases according to DVGW Worksheet G 260, DIN 3384



**Note:** Please take into account the dynamic and thermal reduction factors with respect to the pressure values. The pressure values listed apply to hoses only.

**Ordering information:** Other designs available on request

Identification	Ø ID	Ø AD	Tolerances of ID/ED	bend radius stat.	bend radius dyn.	OP at 20°C (stat.)	Weight per m	Production length (m)
	mm	mm						
ICO 010	10,60	16,10	0,30	35	125	5,0	0,110	upon request
ICO 013	12,30	18,00	0,30	35	140	5,0	0,115	upon request
ICO 016	15,70	23,70	0,40	45	190	4,0	0,175	upon request
ICO 020	19,80	28,80	0,40	55	215	3,0	0,260	upon request
ICO 025	25,80	34,50	0,40	70	250	3,0	0,320	upon request
ICO 032	33,00	43,70	0,40	80	270	3,0	0,500	upon request
ICO 040	40,00	52,00	0,50	100	320	2,0	0,630	10 to 12
ICO 050	51,60	65,50	0,50	130	360	1,0	0,810	10 to 12
ICO 065	66,00	85,40	0,60	175	450	1,0	1,380	10 to 12
ICO 080	76,60	97,50	0,60	200	500	1,0	1,520	10 to 12
ICO 100	103,00	125,00	1,00	250	600	1,0	2,150	10 to 12
ICO 125	127,50	151,50	1,00	325	750	1,0	3,250	10 to 12
ICO 150	151,50	177,00	1,00	375	850	0,8	4,100	10 to 12
ICO 200	200,00	227,00	0,80	260	950	0,8	7,300	10 to 12
ICO 250	250,00	282,00	0,80	340	1200	0,6	9,200	10 to 12
ICO 300	300,00	335,00	1,00	420	1600	0,5	12,700	10 to 12

**Web:** <http://cat.hansa-flex.com/en/ICO>


**Product versions:**

- ICA - Metal hose, 1 braiding with 1.4301
- ICB - Metal hose, 2 braidings with 1.4301
- IBA - Metal hose, 1 braiding with 1.4301

ICA

## Metal hose

<b>Application:</b>	Well suited for use in gas technology
<b>Design:</b>	parallel corrugation, single wall, normal corrugation
<b>Hose material:</b>	Stainless steel 1.4541
<b>Braiding:</b>	1 braiding with 1.4301
<b>Standard:</b>	DIN EN ISO 10380
<b>Temp. min.:</b>	-200 °C
<b>Temp. max.:</b>	550 °C
<b>Temp.:</b>	applies for the hose only
<b>Approval:</b>	Approval for all gases according to DVGW Worksheet G 260, DIN 3384



**Note:** Please take into account the dynamic and thermal reduction factors with respect to the pressure values. The pressure values listed apply to hoses only.

**Ordering information:** Other designs available on request

Identification	Ø ID	Ø AD	Tolerances of ID/ED	bend radius stat.	bend radius dyn.	OP at 20°C (stat.)	Weight per m	Production length (m)
	mm	mm						
ICA 010	10,60	17,50	0,30	35	190	75,0	0,250	upon request
ICA 013	12,30	19,50	0,30	35	210	70,0	0,290	upon request
ICA 016	15,70	25,20	0,40	45	285	65,0	0,370	upon request
ICA 020	19,80	30,30	0,40	55	310	50,0	0,500	upon request
ICA 025	25,80	36,00	0,40	70	375	40,0	0,640	upon request
ICA 032	33,00	45,70	0,40	80	405	35,0	1,000	upon request
ICA 040	40,00	54,00	0,50	100	480	30,0	1,200	10 to 12
ICA 050	51,60	67,50	0,50	130	550	25,0	1,540	10 to 12
ICA 065	66,00	87,90	0,60	175	675	20,0	2,550	10 to 12
ICA 080	76,60	100,00	0,60	200	750	18,0	2,900	10 to 12
ICA 100	103,00	128,00	1,00	250	920	14,0	4,200	10 to 12
ICA 125	127,50	154,50	1,00	325	1160	12,5	5,800	10 to 12
ICA 150	151,50	180,00	1,00	375	1320	10,0	6,800	10 to 12
ICA 200	200,00	232,00	1,60	260	1400	6,0	11,000	10 to 12

## ICA

(Continued)

## Metal hose

Identification	Ø ID mm	Ø AD mm	Tolerances of ID/ED mm	bend radius stat. mm	bend radius dyn. mm	OP at 20°C (stat.) bar	Weight per m kg	Production length (m)
ICA 250	250,00	287,00	1,60	340	1650	3,5	13,500	10 to 12
ICA 300	300,00	340,00	2,00	420	2000	2,0	17,600	10 to 12

Web: <http://cat.hansa-flex.com/en/ICA>

## Product versions:


ICO - Metal hose, without braiding

ICB - Metal hose, 2 braidings with 1.4301

IBA - Metal hose, 1 braiding with 1.4301

## IBA

## Metal hose



<b>Application:</b>	Well suited for use in gas technology
<b>Design:</b>	annular corrugation, medium-walled, single wall, normal corrugation
<b>Properties:</b>	The related material ensures good resistance to corrosion suitable for use with aggressive media
<b>Hose material:</b>	Stainless steel 1.4404
<b>Braiding:</b>	1 braiding with 1.4301
<b>Standard:</b>	DIN EN ISO 10380
<b>Temp. min.:</b>	-200 °C
<b>Temp. max.:</b>	550 °C
<b>Temp.:</b>	applies for the hose only
<b>Approval:</b>	Approval for all gases according to DVGW Worksheet G 260, DIN 3384

**Note:** Please take into account the dynamic and thermal reduction factors with respect to the pressure values. The pressure values listed apply to hoses only.

**Ordering information:** Other designs available on request

Identification	Ø ID mm	Ø AD mm	Tolerances of ID/ED mm	bend radius stat. mm	bend radius dyn. mm	OP at 20°C (stat.) bar	Weight per m kg	Production length (m)
IBA 006	6,30	11,10	0,30	12	140	150,0	0,164	upon request
IBA 008	8,20	13,60	0,30	32	165	135,0	0,214	upon request
IBA 010	10,60	17,50	0,80	35	190	75,0	0,250	upon request
IBA 013	12,30	19,50	0,80	35	210	70,0	0,290	upon request
IBA 016	15,70	25,20	1,00	45	285	65,0	0,370	upon request
IBA 020	19,80	30,30	1,00	55	310	50,0	0,500	upon request
IBA 025	25,80	36,00	1,00	70	375	40,0	0,640	upon request
IBA 032	33,00	45,70	1,00	80	405	35,0	1,000	upon request
IBA 040	40,00	54,00	1,20	100	480	30,0	1,200	10 to 12
IBA 050	51,60	67,50	1,20	130	550	25,0	1,540	10 to 12
IBA 065	66,00	87,90	1,40	175	675	20,0	2,550	10 to 12
IBA 080	76,60	100,00	1,40	200	750	18,0	2,900	10 to 12
IBA 100	103,00	128,00	1,40	250	920	14,0	4,200	10 to 12

Web: <http://cat.hansa-flex.com/en/IBA>

## Product versions:

ICA - Metal hose, 1 braiding with 1.4301

ICO - Metal hose, without braiding


ICB - Metal hose, 2 braidings with 1.4301



## ICB

## Metal hose

**Application:** Well suited for use in gas technology  
**Design:** parallel corrugation, single wall, normal corrugation  
**Hose material:** Stainless steel 1.4541  
**Braiding:** 2 braidings with 1.4301  
**Standard:** DIN EN ISO 10380  
**Temp. min.:** -200 °C  
**Temp. max.:** 550 °C  
**Temp.:** applies for the hose only  
**Approval:** Approval for all gases according to DVGW Worksheet G 260, DIN 3384, from NW 65



**Note:** Please take into account the dynamic and thermal reduction factors with respect to the pressure values. The pressure values listed apply to hoses only.

**Ordering information:** Other designs available on request

Identification	Ø		Tolerances of ID/ED	bend radius		OP at 20°C (stat.)	Weight per m	Production length (m)
	mm	mm		mm	mm			
ICB 010	10,60	19,00	1,00	35	205	105,0	0,400	upon request
ICB 013	12,30	21,00	1,00	35	225	100,0	0,470	upon request
ICB 016	15,70	26,70	1,20	45	305	90,0	0,580	upon request
ICB 020	19,80	31,80	1,20	55	330	75,0	0,760	upon request
ICB 025	25,80	37,40	1,20	70	385	60,0	0,960	upon request
ICB 032	33,00	47,70	1,20	80	415	50,0	1,520	upon request
ICB 040	40,00	56,00	1,40	100	490	40,0	1,770	upon request
ICB 050	51,60	69,50	1,40	130	570	32,0	2,300	10 to 12
ICB 065	66,00	90,40	1,60	175	685	25,0	3,800	10 to 12
ICB 080	76,50	102,50	1,60	200	770	22,0	4,350	10 to 12
ICB 100	103,00	130,00	1,60	250	960	20,0	6,300	10 to 12

**Web:** <http://cat.hansa-flex.com/en/ICB>


**Product versions:**

- ICO - Metal hose, without braiding
- ICA - Metal hose, 1 braiding with 1.4301
- IBA - Metal hose, 1 braiding with 1.4301

## FBO

## Metal hose

**Application:** Specially corrugated, suitable for use in the foodstuffs and chemical industries  
**Design:** annular corrugation, single wall, wide corrugated  
**Properties:** Hose line based on DIN 2827  
**Hose material:** Stainless steel 1.4404  
**Braiding:** without braiding  
**Standard:** DIN EN ISO 10380  
**Temp. min.:** -200 °C  
**Temp. max.:** 550 °C  
**Temp.:** applies for the hose only



**Note:** Please take into account the dynamic and thermal reduction factors with respect to the pressure values. The pressure values listed apply to hoses only.


**Ordering information:** Other designs available on request

Identification	Ø		Tolerances of ID/ED	bend radius stat.	OP at 20°C (stat.)
	mm	mm			
FBO 006	6,20	9,80	0,30	10	18,0
FBO 008	8,50	13,60	0,30	14	14,0
FBO 010	10,40	16,20	0,30	16	10,0
FBO 013	12,40	18,60	0,40	24	12,0
FBO 016	15,40	22,50	0,40	29	7,5
FBO 020	20,30	28,30	0,40	35	4,3
FBO 025	25,40	34,80	0,40	42	3,0
FBO 032	32,30	43,40	0,50	51	3,3
FBO 040	40,20	52,40	0,50	61	2,2
FBO 050	50,00	64,80	0,60	73	2,1
FBO 065	64,90	80,90	0,70	89	1,3
FBO 080	79,60	99,60	0,80	108	1,4
FBO 100	101,50	126,50	0,80	126	0,5
FBO 125	126,00	152,00	1,00	147	0,4
FBO 150	149,00	174,00	1,00	169	0,3

**Web:** <http://cat.hansa-flex.com/en/FBO>

**Product versions:**

- FBA - Metal hose, 1 braiding with 1.4301

**FBA****Metal hose**

<b>Application:</b>	Specially corrugated, suitable for use in the foodstuffs and chemical industries
<b>Design:</b>	annular corrugation, single wall, wide corrugated
<b>Properties:</b>	Hose line based on DIN 2827
<b>Hose material:</b>	Stainless steel 1.4404
<b>Braiding:</b>	1 braiding with 1.4301
<b>Standard:</b>	DIN EN ISO 10380
<b>Temp. min.:</b>	-200 °C
<b>Temp. max.:</b>	550 °C
<b>Temp.:</b>	applies for the hose only
<b>Approval:</b>	DVGW W543 Water approval up to NW 32

**Note:** Please take into account the dynamic and thermal reduction factors with respect to the pressure values. The pressure values listed apply to hoses only.


**Ordering information:** Other designs available on request

Identification	Ø ID mm	Ø AD mm	Tolerances of ID/ED mm	bend radius stat. mm	bend radius dyn. mm	OP at 20°C (stat.) bar
FBA 006	6,20	11,40	0,30	23	110	140,0
FBA 008	8,50	15,20	0,30	28	130	115,0
FBA 010	10,40	17,80	0,30	32	150	100,0
FBA 013	12,40	20,20	0,40	39	165	80,0
FBA 016	15,40	24,10	0,40	50	195	63,0
FBA 020	20,30	29,90	0,40	60	225	50,0
FBA 025	25,40	36,40	0,40	73	260	40,0
FBA 032	32,30	45,40	0,50	90	300	40,0
FBA 040	40,20	54,40	0,50	115	340	32,0
FBA 050	50,00	67,30	0,60	140	390	32,0
FBA 065	64,90	83,40	0,70	175	460	25,0
FBA 080	79,60	102,60	0,80	240	660	23,0
FBA 100	101,50	129,50	0,80	290	750	15,0
FBA 125	126,00	155,00	1,00	340	1000	13,0
FBA 150	149,00	177,00	1,00	390	1250	11,0

**Web:** <http://cat.hansa-flex.com/en/FBA>

**Product versions:**

**FBO** - Metal hose, without braiding

**FPCO****Metal hose**

<b>Application:</b>	The close curl suitable for small bending radii
<b>Design:</b>	parallel corrugation, single wall, narrow corrugation
<b>Hose material:</b>	Stainless steel 1.4541
<b>Braiding:</b>	without braiding
<b>Standard:</b>	DIN EN ISO 10380
<b>Temp. min.:</b>	-200 °C
<b>Temp. max.:</b>	550 °C
<b>Temp.:</b>	applies for the hose only

**Note:** Please take into account the dynamic and thermal reduction factors with respect to the pressure values. The pressure values listed apply to hoses only.

**Ordering information:** Other designs available on request

Identification	Ø ID mm	Ø AD mm	Tolerances of ID/ED mm	bend radius stat. mm	OP at 20°C (stat.) bar
FPCO 013	12,00	18,60	0,40	21	6,0
FPCO 016	15,00	22,50	0,40	26	3,0
FPCO 020	19,90	28,30	0,40	32	2,2
FPCO 025	24,90	34,80	0,40	37	1,8
FPCO 032	31,80	43,40	0,50	46	1,6
FPCO 040	39,60	52,40	0,50	55	1,2
FPCO 050	49,40	64,80	0,60	65	1,0
FPCO 065	64,00	80,90	0,70	80	0,5
FPCO 080	78,70	99,60	0,80	97	0,7
FPCO 100	101,00	126,50	0,80	113	0,4
FPCO 150	148,20	174,00	1,00	152	0,2

**Web:** <http://cat.hansa-flex.com/en/FPCO>


**Product versions:**

**FPCA** - Metal hose, 1 braiding with 1.4301

## FPCA

## Metal hose

**Application:** The close curl suitable for small bending radii  
**Design:** parallel corrugation, single wall, narrow corrugation  
**Hose material:** Stainless steel 1.4541  
**Braiding:** 1 braiding with 1.4301  
**Standard:** DIN EN ISO 10380  
**Temp. min.:** -200 °C  
**Temp. max.:** 550 °C  
**Temp.:** applies for the hose only



**Note:** Please take into account the dynamic and thermal reduction factors with respect to the pressure values. The pressure values listed apply to hoses only.

**Ordering information:** Other designs available on request

Identification	Ø ID	Ø AD	Tolerances of ID/ED	bend radius stat.	bend radius dyn.	OP at 20°C (stat.)
	mm	mm	mm	mm	mm	bar
FPCA 013	12,00	20,20	0,40	25	124	80,0
FPCA 016	15,00	24,10	0,40	32	146	63,0
FPCA 020	19,90	29,90	0,40	38	169	55,0
FPCA 025	24,90	36,40	0,40	45	195	40,0
FPCA 032	31,80	45,40	0,50	58	225	40,0
FPCA 040	39,60	54,40	0,50	70	255	32,0
FPCA 050	49,40	67,30	0,60	85	293	32,0
FPCA 065	64,00	83,40	0,70	105	345	25,0
FPCA 080	78,70	102,60	0,80	180	495	23,0
FPCA 100	101,00	129,50	0,80	218	563	15,0
FPCA 125	125,20	155,00	1,00	255	1000	13,0
FPCA 150	148,20	177,00	1,00	290	1250	11,0

**Web:** <http://cat.hansa-flex.com/en/FPCA>


**Product versions:**

FPCO - Metal hose, without braiding

## ABBS

## Metal hose

**Application:** The thick-walled design of this hose makes it, ideally suited for high pressure applications.  
**Design:** parallel corrugation, thick-walled, normal corrugation  
**Hose material:** Stainless steel 1.4404  
**Braiding:** 2 braidings with 1.4301  
**Standard:** DIN EN ISO 10380  
**Temp. min.:** -200 °C  
**Temp. max.:** 550 °C  
**Temp.:** applies for the hose only




**Note:** Please take into account the dynamic and thermal reduction factors with respect to the pressure values. The pressure values listed apply to hoses only.

**Ordering information:** Other designs available on request

Identification	Ø ID	Ø AD	Tolerances of ID/ED	bend radius stat.	bend radius dyn.	OP at 20°C (stat.)	Weight per m	Production length (m)
	mm	mm	mm	mm	mm	bar	kg	
ABB 006 S	6,20	13,00	0,20	40	110	250,0	0,330	10 to 100
ABB 008 S	8,00	16,10	0,20	50	130	250,0	0,490	10 to 100
ABB 010 S	10,00	19,10	0,30	60	150	200,0	0,660	10 to 100
ABB 013 S	12,10	21,90	0,30	70	165	200,0	0,820	10 to 100
ABB 016 S	16,10	27,80	0,30	90	195	200,0	1,290	10 to 100

**Web:** <http://cat.hansa-flex.com/en/ABBS>

**DCO S****Metal hose**

<b>Application:</b>	The thick-walled design of this hose makes it, ideally suited for high pressure applications.
<b>Design:</b>	parallel corrugation, thick-walled, flat corrugation
<b>Hose material:</b>	Stainless steel 1.4541
<b>Braiding:</b>	without braiding
<b>Temp. min.:</b>	-200 °C
<b>Temp. max.:</b>	550 °C
<b>Temp.:</b>	applies for the hose only

**Note:** Please take into account the dynamic and thermal reduction factors with respect to the pressure values. The pressure values listed apply to hoses only.

**Ordering information:** Other designs available on request


Identification	Ø ID	Ø AD	Tolerances of ID/ED	bend radius stat.	bend radius dyn.	OP at 20°C (stat.)	Weight per m	Production length (m)
	mm	mm						
DCO 020 S	19,50	28,80	0,80	55	450	3,2	0,420	upon request
DCO 025 S	25,60	36,50	0,40	70	510	3,2	0,570	upon request
DCO 032 S	32,60	43,70	0,40	80	560	3,2	0,840	upon request
DCO 040 S	39,60	52,00	0,50	100	600	2,0	1,020	10 to 12
DCO 050 S	51,00	65,50	0,50	130	680	2,0	1,700	10 to 12
DCO 065 S	65,50	85,40	0,60	175	770	2,0	2,400	10 to 12
DCO 080 S	76,10	97,50	0,60	200	920	2,0	2,600	10 to 12
DCO 100 S	102,40	125,00	1,00	250	1100	2,0	4,050	10 to 12
DCO 125 S	127,50	151,50	1,00	325	750	1,0	3,250	10 to 12
DCO 150 S	151,50	177,00	1,00	375	850	0,8	4,100	10 to 12

**Web:** <http://cat.hansa-flex.com/en/DCOS>

**Product versions:**

**DCA S** - Metal hose, 1 braiding with 1.4301

**DCB S** - Metal hose, 2 braidings with 1.4301

**DCA S****Metal hose**

<b>Application:</b>	The thick-walled design of this hose makes it, ideally suited for high pressure applications.
<b>Design:</b>	parallel corrugation, thick-walled, flat corrugation
<b>Hose material:</b>	Stainless steel 1.4541
<b>Braiding:</b>	1 braiding with 1.4301
<b>Temp. min.:</b>	-200 °C
<b>Temp. max.:</b>	550 °C
<b>Temp.:</b>	applies for the hose only

**Note:** Please take into account the dynamic and thermal reduction factors with respect to the pressure values. The pressure values listed apply to hoses only.

**Ordering information:** Other designs available on request

Identification	Ø ID	Ø AD	Tolerances of ID/ED	bend radius stat.	bend radius dyn.	OP at 20°C (stat.)	Weight per m	Production length (m)
	mm	mm						
DCA 020 S	19,50	30,00	0,40	55	600	75,0	0,800	upon request
DCA 025 S	25,60	38,10	0,40	70	680	60,0	1,120	upon request
DCA 032 S	32,60	45,70	0,40	80	750	50,0	1,450	upon request
DCA 040 S	39,60	54,00	0,50	100	850	45,0	1,820	10 to 12
DCA 050 S	51,00	67,50	0,50	130	950	40,0	2,900	10 to 12
DCA 065 S	65,50	87,80	0,60	175	1050	35,0	3,900	10 to 12
DCA 080 S	76,10	99,90	0,60	200	1280	25,0	4,200	10 to 12
DCA 100 S	102,40	127,40	1,00	250	1430	20,0	6,200	10 to 12
DCA 125 S	127,50	154,50	1,00	325	1160	12,5	5,800	10 to 12
DCA 150 S	151,50	180,00	1,00	375	1320	10,0	6,800	10 to 12

**Web:** <http://cat.hansa-flex.com/en/DCAS>

**Product versions:**

**DCB S** - Metal hose, 2 braidings with 1.4301

**DCO S** - Metal hose, without braiding

## DCB S

## Metal hose

**Application:** The thick-walled design of this hose makes it, ideally suited for high pressure applications.

**Design:** parallel corrugation, thick-walled, flat corrugation


**Hose material:** Stainless steel 1.4541

**Braiding:** 2 braidings with 1.4301

**Temp. min.:** -200 °C

**Temp. max.:** 550 °C

**Temp.:** applies for the hose only



**Note:** Please take into account the dynamic and thermal reduction factors with respect to the pressure values. The pressure values listed apply to hoses only.

**Ordering information:** Other designs available on request

Identification	Ø ID	Ø AD	Tolerances of ID/ED	bend radius stat.	bend radius dyn.	OP at 20°C (stat.)	Weight per m	Production length (m)
	mm	mm						
DCB 020 S	19,50	31,20	0,40	55	640	120,0	1,200	upon request
DCB 025 S	25,60	39,70	0,40	70	710	100,0	1,700	upon request
DCB 032 S	32,60	47,70	0,40	80	790	90,0	2,100	upon request
DCB 040 S	39,60	56,00	0,50	100	900	80,0	2,700	10 to 12
DCB 050 S	51,00	69,50	0,50	130	1000	65,0	4,050	10 to 12
DCB 065 S	65,50	90,20	0,60	175	1100	50,0	5,400	10 to 12
DCB 080 S	76,10	102,30	0,60	200	1380	40,0	5,800	10 to 12
DCB 100 S	102,40	129,80	1,00	250	1500	32,0	8,400	10 to 12
DCB 125 S	127,50	157,50	1,00	325	1200	18,0	8,400	10 to 12
DCB 150 S	151,50	183,00	1,00	375	1400	15,0	9,600	10 to 12

**Web:** <http://cat.hansa-flex.com/en/DCBS>

**Product versions:**

DCA S - Metal hose, 1 braiding with 1.4301

DCO S - Metal hose, without braiding

## PTFE NATUR

## PTFE-Tube

**Application:** Low pressure applications with hydraulic fluids and aggressive media

**Application:** Mainly for the chemical and food industries

**Design:** white PTFE smooth hose

**Properties:** The smooth inner liner prevents residue buildup in the hose, Suitable for use with foodstuffs


**Hose material:** PTFE (polytetrafluoroethylene)

**Colour:** Natural

**Temp. min.:** -200 °C

**Temp. max.:** 260 °C

**Approval:** the base material has been granted FDA approval.



**Note:** The pressure values listed apply to hoses only.  
The tubular fabric has a safety factor (SF) 4 against bursting  
From 50 °C the pressure reduction factor is to be taken into account.  
(Max. operating pressure = operating pressure x factor).  
Temp.: 50 °C / 75 °C / 100 °C / 150 °C / 200 °C / 250 °C  
Factor: 0,87 / 0,77 / 0,68 / 0,53 / 0,39 / 0,28


**Ordering information:** Other designs available on request

Identification	Ø ID	Ø AD	Wall thickness	OP at 20°C (stat.)	Production length max.
	mm	mm			
PTFE 2/4 NATUR	2,00	4,00	1,00	20,0	300
PTFE 4/6 NATUR	4,00	6,00	1,00	12,0	500
PTFE 6/8 NATUR	6,00	8,00	1,00	8,5	100
PTFE 6/10 NATUR	6,00	10,00	2,00	15,0	50
PTFE 7/10 NATUR	7,00	10,00	1,50	10,5	50
PTFE 8/10 NATUR	8,00	10,00	1,00	7,0	50
PTFE 10/12 NATUR	10,00	12,00	1,00	5,5	100

**Web:** <http://cat.hansa-flex.com/en/PTFENATUR>

## TF 100

## PTFE hose, smooth, 1 braiding

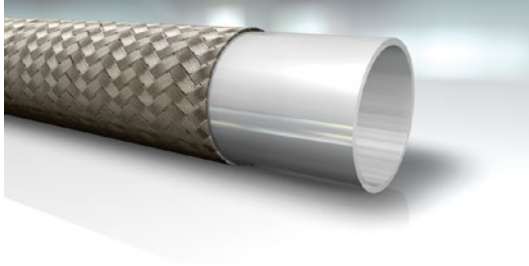

<b>Application:</b>	Medium pressure applications with hydraulic fluids and aggressive media
<b>Application:</b>	Mainly for the chemical and food industries
<b>Design:</b>	Smooth inliner in white PTFE
<b>Properties:</b>	The smooth inner liner prevents residue buildup in the hose, Suitable for use with foodstuffs
<b>Braiding:</b>	1 braiding with 1.4301 / 1.4306
<b>Inner layer:</b>	PTFE
<b>Outer layer:</b>	none
<b>Colour:</b>	metallic
<b>Temp. min.:</b>	-70 °C
<b>Temp. max.:</b>	260 °C
<b>Temp.:</b>	applies for the hose only
<b>Material:</b>	PTFE (polytetrafluoroethylene)
<b>Approval:</b>	the base material has been granted FDA approval.

**Note:** The pressure values listed apply to hoses only.  
 The tubular fabric has a safety factor (SF) 3 against bursting  
 Not recommended for high dynamic pressure loads.  
 From 120 °C the pressure reduction factor is to be taken into account.  
 (Max. operating pressure = operating pressure x factor).  
 Temp.: 120 °C / 140 °C / 160 °C / 180 °C / 200 °C / 220 °C  
 Factor: 1,00 / 0,80 / 0,60 / 0,40 / 0,20 / 0,00

**Ordering information:** Other designs available on request


Identification	DN*	Inches	Size	Internal Ø		External Ø		Min. bending radius	Operating pressure	Test pressure	Burst pressure	Weight per m	Production length (m)
				min. mm	max. mm	min. mm	max. mm						
TF 104	5	3/16"	3	5,0	5,4	7,5	8,6	64	264,0	396	793	0,090	20 to 80
TF 106	6	1/4"	4	6,5	7,0	8,8	9,9	76	224,0	336	672	0,092	20 to 80
TF 108	8	5/16"	5	8,2	8,7	10,5	11,6	102	207,0	311	621	0,141	20 to 80
TF 110	10	3/8"	6	9,9	10,6	12,8	14,1	133	183,0	275	552	0,148	20 to 80
TF 113	12	1/2"	8	13,1	13,4	15,9	17,2	152	161,0	242	483	0,249	20 to 80
TF 116	16	5/8"	10	16,0	17,1	19,0	20,6	178	114,0	171	345	0,290	10 to 20
TF 120	19	3/4"	12	19,3	20,3	22,2	23,8	203	103,0	155	310	0,339	10 to 20
TF 125	25	1"	16	25,8	26,6	28,5	30,1	305	80,0	120	241	0,461	10 to 20

DN = Nominal diameter, nominal width

**Web:** <http://cat.hansa-flex.com/en/TF100>

## TF 200

## PTFE hose, smooth, 2 braidings

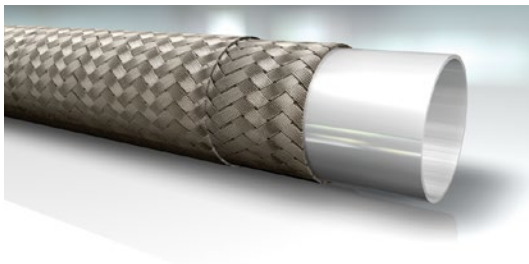

<b>Application:</b>	Medium pressure applications with hydraulic fluids and aggressive media
<b>Application:</b>	Mainly for the chemical and food industries
<b>Design:</b>	Smooth inliner in white PTFE
<b>Properties:</b>	The smooth inner liner prevents residue buildup in the hose, Suitable for use with foodstuffs
<b>Braiding:</b>	2 braidings with 1.4301 / 1.4306
<b>Inner layer:</b>	PTFE
<b>Outer layer:</b>	none
<b>Colour:</b>	metallic
<b>Temp. min.:</b>	-70 °C
<b>Temp. max.:</b>	260 °C
<b>Temp.:</b>	applies for the hose only
<b>Material:</b>	PTFE (polytetrafluoroethylene)
<b>Approval:</b>	the base material has been granted FDA approval.

**Note:** The pressure values listed apply to hoses only.  
 The tubular fabric has a safety factor (SF) 3 against bursting  
 Not recommended for high dynamic pressure loads.  
 From 120 °C the pressure reduction factor is to be taken into account.  
 (Max. operating pressure = operating pressure x factor).  
 Temp.: 120 °C / 140 °C / 160 °C / 180 °C / 200 °C / 220 °C  
 Factor: 1,00 / 0,80 / 0,60 / 0,40 / 0,20 / 0,00

**Ordering information:** Other designs available on request

Identification	DN*	Inches	Size	Internal Ø		External Ø		Min. bending radius	Operating pressure	Test pressure	Burst pressure	Weight per m	Production length (m)
				min. mm	max. mm	min. mm	max. mm						
TF 206	6	1/4"	4	6,3	7,1	9,9	11,1	76	247,0	371	741	0,179	20 to 80
TF 208	8	5/16"	5	8,0	8,8	12,0	13,2	102	230,0	345	690	0,241	20 to 80

DN = Nominal diameter, nominal width

(Continued)

TF 200

## PTFE hose, smooth, 2 braidings

Identification	DN*	Inches	Size	Internal Ø		External Ø		Min. bending radius	Operating pressure	Test pressure	Burst pressure	Weight per m	Production length (m)
				min. mm	max. mm	min. mm	max. mm						
TF 210	10	3/8"	6	9,6	10,4	14,0	15,2	133	207,0	345	621	0,311	20 to 80
TF 213	12	1/2"	8	12,8	13,6	17,2	19,9	152	183,0	275	552	0,411	20 to 80
TF 216	16	5/8"	10	16,1	17,1	20,3	21,7	178	138,0	207	414	0,470	10 to 20
TF 220	19	3/4"	12	19,2	20,4	23,5	25,2	203	126,0	189	379	0,551	10 to 20
TF 225	25	1"	16	25,5	26,7	29,9	31,6	305	103,0	155	310	0,732	10 to 20



DN = Nominal diameter, nominal width

Web: <http://cat.hansa-flex.com/en/TF200>

ATS 100

## PTFE smooth hose

- Application:** Medium pressure applications with hydraulic fluids and aggressive media
- Application:** Mainly for the chemical and food industries
- Design:** Smooth inliner made from multilayer, black PTFE, antistatic design
- Properties:** The smooth inner liner prevents residue buildup in the hose, Suitable for use with foodstuffs
- Hose material:** PTFE (polytetrafluoroethylene)
- Braiding:** 1 braiding with 1.4301 / 1.4306
- Temp. min.:** -70 °C
- Temp. max.:** 260 °C
- Temp.:** applies for the hose only
- Approval:** the base material has been granted FDA approval.



- Note:** The pressure values listed apply to hoses only.  
The tubular fabric has a safety factor (SF) 3 against bursting  
From 120 °C the pressure reduction factor is to be taken into account.  
(Max. operating pressure = operating pressure x factor).  
Temp.: 120 °C / 140 °C / 160 °C / 180 °C / 200 °C / 220 °C  
Factor: 1,00 / 0,80 / 0,60 / 0,40 / 0,20 / 0,00

**Ordering information:** Other designs available on request

Identification	Internal Ø		External Ø		Wall thickness	Min. bending radius	OP at 20°C (stat.)	Weight per m
	min. mm	max. mm	min. mm	max. mm				
ATS 106	6,5	7,0	8,8	9,9	0,76	76	224,0	0,092
ATS 108	8,2	8,7	10,5	11,6	0,64	102	207,0	0,141
ATS 110	9,9	10,6	12,8	14,1	0,89	133	183,0	0,148
ATS 113	13,1	13,4	15,5	17,2	0,89	152	161,0	0,249
ATS 116	16,1	17,1	19,0	20,6	0,89	178	114,0	0,290
ATS 120	19,3	20,3	22,2	23,8	0,89	203	103,0	0,339
ATS 125	25,6	26,6	28,5	30,1	0,89	305	80,0	0,461


Web: <http://cat.hansa-flex.com/en/ATS100>**Product versions:**

TF 100 - PTFE hose, smooth, 1 braiding, Smooth inliner in white PTFE

TF 200 - PTFE hose, smooth, 2 braidings, Smooth inliner in white PTFE

## ASW

## PTFE smooth hose



<b>Application:</b>	Well suited for high and low pressure applications with small bending radii
<b>Application:</b>	Mainly for the chemical and food industries
<b>Design:</b>	Smooth inliner in white PTFE
<b>Properties:</b>	The smooth inner liner prevents residue buildup in the hose, Suitable for use with foodstuffs
<b>Hose material:</b>	PTFE (polytetrafluoroethylene)
<b>Braiding:</b>	without braiding, outer vacuum support spiral
<b>Temp. min.:</b>	-70 °C
<b>Temp. max.:</b>	260 °C
<b>Temp.:</b>	applies for the hose only
<b>Material:</b>	PTFE (polytetrafluoroethylene)
<b>Approval:</b>	the base material has been granted FDA approval.

**Note:** The pressure values listed apply to hoses only.  
 The tubular fabric has a safety factor (SF) 4 against bursting  
 From 120 °C the pressure reduction factor is to be taken into account.  
 (Max. operating pressure = operating pressure x factor).  
 Temp.: 120 °C / 140 °C / 160 °C / 180 °C / 200 °C / 220 °C  
 Factor: 1,00 / 0,80 / 0,60 / 0,40 / 0,20 / 0,00

**Ordering information:** Other designs available on request

Identification	Internal Ø min. mm	External Ø min. mm	Wall thickness mm	Min. bending radius mm	OP at 20°C (stat.) bar	Weight per m kg
ASW 013	11,5	16,2	1,25	38	7,0	0,150
ASW 016	15,5	20,2	1,25	42	5,0	0,180
ASW 020	20,0	23,2	1,00	50	5,0	0,200
ASW 025	22,8	26,0	1,00	70	5,0	0,360
ASW 032	30,5	35,7	1,50	85	5,0	0,450
ASW 040	36,5	42,5	1,50	100	5,0	0,660
ASW 050	48,5	55,1	1,65	140	5,0	0,950

**Web:** <http://cat.hansa-flex.com/en/ASW>

## TF 100 S

## PTFE hose, smooth, 1 braiding, heavy



<b>Application:</b>	Medium pressure applications with hydraulic fluids and aggressive media
<b>Application:</b>	Mainly for the chemical and food industries
<b>Design:</b>	Smooth inliner in white PTFE, thick-walled, flexible
<b>Properties:</b>	The smooth inner liner prevents residue buildup in the hose
<b>Hose material:</b>	PTFE (polytetrafluoroethylene)
<b>Braiding:</b>	1 braiding with 1.4301
<b>Temp. min.:</b>	-70 °C
<b>Temp. max.:</b>	260 °C

**Note:** The pressure values listed apply to hoses only.  
 The tubular fabric has a safety factor (SF) 3 against bursting  
 From 20 °C the pressure reduction factor is to be taken into account.  
 (Max. operating pressure = operating pressure x factor).  
 Temp.: 20 °C / 50 °C / 70 °C / 120 °C / 170 °C / 220 °C  
 Factor: 1,00 / 0,90 / 0,85 / 0,65 / 0,40 / 0,18

**Ordering information:** Other designs available on request

Identification	Internal Ø min. mm	Internal Ø max. mm	External Ø mm	Wall thickness mm	Min. bending radius mm	OP at 20°C (stat.) bar
TF 104 S	4,8	5,2	8,7	1,00	50	333,0
TF 106 S	6,0	6,6	10,2	1,00	60	306,0
TF 108 S	7,7	8,3	11,7	1,00	100	266,0
TF 110 S	9,7	10,3	14,2	1,30	120	233,0
TF 113 S	12,6	13,4	17,2	1,30	135	200,0
TF 116 S	15,6	16,4	20,2	1,50	165	166,0
TF 120 S	19,2	20,0	23,8	1,50	190	133,0


**Web:** <http://cat.hansa-flex.com/en/TF100S>



## KTF 300

## PTFE hose

- Application:** High-pressure applications with hydraulic fluids and aggressive media
- Application:** Mainly for the chemical and food industries
- Design:** Smooth inliner in white PTFE, thick-walled
- Properties:** The smooth inner liner prevents residue buildup in the hose
- Hose material:** PTFE (polytetrafluoroethylene)
- Braiding:** two braids of steel wired, bronzed, one layer of steel wire galvanised.
- Temp. min.:** -70 °C
- Temp. max.:** 250 °C
- Temp.:** applies for the hose only



- Note:** The pressure values listed apply to hoses only.  
The tubular fabric has a safety factor (SF) 4 against bursting  
From 50 °C the pressure reduction factor is to be taken into account.  
(Max. operating pressure = operating pressure x factor).  
Temp.: 100 °C / 150 °C / 200 °C  
Factor: 0,95 / 0,90 / 0,83

**Ordering information:** Other designs available on request

Identification	Internal Ø		External Ø		Min. bending radius mm	OP at 20°C (stat.)		Weight per m kg
	mm	mm	mm	mm		bar	kg	
KTF 306	6,2	11,2	11,2	60	60	500,0	0,262	
KTF 308	8,0	13,4	13,4	85	85	475,0	0,345	
KTF 310	10,0	15,7	15,7	110	110	475,0	0,442	
KTF 313	12,2	18,8	18,8	150	150	450,0	0,600	
KTF 316	15,1	21,6	21,6	175	175	400,0	0,700	
KTF 320	20,2	27,8	27,8	200	200	300,0	1,055	
KTF 325	24,2	31,7	31,7	240	240	275,0	1,205	

**Web:** <http://cat.hansa-flex.com/en/KTF300>

## TFW

## PTFE hose

- Application:** Medium pressure applications with hydraulic fluids and aggressive media
- Application:** Mainly for the chemical and food industries
- Design:** helically wound, multilayer, white PTFE corrugated hose, with a fibreglass anti-slip intermediate layer
- Properties:** Well suited for vibrations and frequent movement due to fibreglass insert
- Hose material:** PTFE (polytetrafluoroethylene)
- Braiding:** 1 braiding with 1.4301 / 1.4306
- Temp. min.:** -50 °C
- Temp. max.:** 205 °C
- Temp.:** applies for the hose only



- Note:** The pressure values listed apply to hoses only.  
The tubular fabric has a safety factor (SF) 4 against bursting  
From 170 °C the pressure reduction factor is to be taken into account.  
(Max. operating pressure = operating pressure x factor).  
Temp.: 170 °C / 180 °C / 205 °C  
Factor: 0,85 / 0,75 / 0,50

**Ordering information:** Other designs available on request

Identification	Internal Ø min.		Internal Ø max.		External Ø min.		External Ø max.		Min. bending radius mm	OP at 20°C (stat.)		Weight per m kg
	mm	mm	mm	mm	mm	mm	mm	mm		bar	kg	
TFW 010	9,7	10,3	15,2	15,8	50	125,0	0,250					
TFW 013	12,9	13,5	18,4	19,0	65	105,0	0,315					
TFW 016	15,7	16,3	21,7	22,3	80	100,0	0,410					
TFW 020	19,2	19,8	26,6	27,2	100	90,0	0,540					
TFW 025	25,0	26,0	32,4	33,4	125	80,0	0,720					
TFW 032	31,5	32,5	38,9	39,9	150	64,0	0,820					
TFW 040	38,0	39,0	45,4	46,4	200	53,0	1,050					
TFW 050	50,4	51,6	57,8	59,0	250	35,0	1,270					
TFW 065	63,5	65,5	74,0	76,0	320	25,0	1,960					
TFW 080	75,5	77,5	87,0	89,0	380	20,0	2,400					

**Web:** <http://cat.hansa-flex.com/en/TFW>

**Product versions:**  
TFS - PTFE hose

## TFS

## PTFE hose



<b>Application:</b>	Medium pressure applications with hydraulic fluids and aggressive media
<b>Application:</b>	Mainly for the chemical and food industries
<b>Design:</b>	helically wound, multilayer, black PTFE corrugated hose, with a fiberglass anti-slip intermediate layer, electrically conductive
<b>Properties:</b>	Well suited for vibrations and frequent movement due to fiberglass insert
<b>Hose material:</b>	PTFE (polytetrafluoroethylene)
<b>Braiding:</b>	1 braiding with 1.4301 / 1.4306
<b>Temp. min.:</b>	-50 °C
<b>Temp. max.:</b>	205 °C
<b>Temp.:</b>	applies for the hose only

**Note:** The pressure values listed apply to hoses only.  
 The tubular fabric has a safety factor (SF) 4 against bursting  
 From 170 °C the pressure reduction factor is to be taken into account.  
 (Max. operating pressure = operating pressure x factor).  
 Temp.: 170 °C / 180 °C / 205 °C  
 Factor: 0,85 / 0,75 / 0,50

**Ordering information:** Other designs available on request

Identification	Internal Ø min. mm	Internal Ø max. mm	External Ø min. mm	External Ø max. mm	Min. bending radius mm	OP at 20°C (stat.) bar	Weight per m kg
TFS 010	9,7	10,3	15,2	15,8	50	125,0	0,260
TFS 013	12,9	13,5	18,4	19,0	65	105,0	0,330
TFS 016	15,7	16,3	21,7	22,3	80	100,0	0,430
TFS 020	19,2	19,8	26,6	27,2	100	90,0	0,565
TFS 025	25,0	26,0	32,4	33,4	125	80,0	0,750
TFS 032	31,5	32,5	38,9	39,9	150	64,0	0,855
TFS 040	38,0	39,0	45,4	46,4	200	53,0	1,100
TFS 050	50,4	51,6	57,8	59,0	250	35,0	1,340
TFS 065	63,5	65,5	74,0	76,0	320	25,0	2,310
TFS 080	75,5	77,5	87,0	89,0	380	20,0	2,800

**Web:** <http://cat.hansa-flex.com/en/TFS>

**Product versions:**

TFW - PTFE hose,

## ATWE

## PTFE corrugated hose



<b>Application:</b>	Medium pressure applications with hydraulic fluids and aggressive media
<b>Application:</b>	Mainly for the chemical and food industries
<b>Design:</b>	coil-corrugated PTFE inliner in white PTFE
<b>Properties:</b>	Due to the wide curl good self-cleaning properties, Suitable for use with foodstuffs
<b>Hose material:</b>	PTFE (polytetrafluoroethylene)
<b>Braiding:</b>	1 braiding with 1.4301 / 1.4306
<b>Temp. min.:</b>	-70 °C
<b>Temp. max.:</b>	260 °C
<b>Temp.:</b>	applies for the hose only
<b>Approval:</b>	the base material has been granted FDA approval.

**Note:** The pressure values listed apply to hoses only.  
 The tubular fabric has a safety factor (SF) 3 against bursting  
 From 120 °C the pressure reduction factor is to be taken into account.  
 (Max. operating pressure = operating pressure x factor).  
 Temp.: 120 °C / 140 °C / 160 °C / 180 °C / 200 °C / 220 °C  
 Factor: 1,00 / 0,80 / 0,60 / 0,40 / 0,20 / 0,00

**Ordering information:** Other designs available on request

Identification	Internal Ø min. mm	Internal Ø max. mm	External Ø min. mm	External Ø max. mm	Wall thickness mm	Min. bending radius mm	OP at 20°C (stat.) bar	Weight per m kg
ATWE 006	6,1	6,7	9,3	9,9	0,75	18	172,0	0,140
ATWE 008	7,9	8,5	12,3	12,9	0,60	20	138,0	0,160
ATWE 010	9,5	10,2	12,8	14,5	0,65	20	138,0	0,152
ATWE 013	12,5	13,1	17,8	19,2	0,80	25	103,0	0,253
ATWE 016	15,7	16,4	21,8	24,0	0,80	51	83,0	0,304
ATWE 020	19,0	19,7	24,0	27,0	1,00	64	69,0	0,374
ATWE 025	25,5	26,2	32,2	36,1	1,00	89	46,0	0,543
ATWE 032	32,0	32,5	40,2	41,3	1,00	125	34,0	0,635

(Continued)

ATWE

## PTFE corrugated hose

Identification	Internal Ø min. mm	Internal Ø max. mm	External Ø min. mm	External Ø max. mm	Wall thickness mm	Min. bending radius mm	OP at 20°C (stat.) bar	Weight per m kg
ATWE 040	38,0	38,9	47,8	49,0	1,00	152	30,0	0,840
ATWE 050	50,9	51,9	60,5	62,3	1,10	200	23,0	1,000

**Web:** <http://cat.hansa-flex.com/en/ATWE>

**Product versions:**

ATSE - PTFE corrugated hose, coil-corrugated PTFE inliner in black PTFE

ATSE

## PTFE corrugated hose

- Application:** Medium pressure applications with hydraulic fluids and aggressive media
- Application:** Mainly for the chemical and food industries
- Design:** coil-corrugated PTFE inliner in black PTFE, antistatic design
- Properties:** Due to the wide curl good self-cleaning properties, Suitable for use with foodstuffs
- Hose material:** PTFE (polytetrafluoroethylene)
- Braiding:** 1 braiding with 1.4301 / 1.4306
- Temp. min.:** -70 °C
- Temp. max.:** 260 °C
- Temp.:** applies for the hose only
- Approval:** the base material has been granted FDA approval.



- Note:** The pressure values listed apply to hoses only.  
The tubular fabric has a safety factor (SF) 3 against bursting  
From 120 °C the pressure reduction factor is to be taken into account.  
(Max. operating pressure = operating pressure x factor).  
Temp.: 120 °C / 140 °C / 160 °C / 180 °C / 200 °C / 220 °C  
Factor: 1,00 / 0,80 / 0,60 / 0,40 / 0,20 / 0,00

**Ordering information:** Other designs available on request

Identification	Internal Ø min. mm	Internal Ø max. mm	External Ø min. mm	External Ø max. mm	Wall thickness mm	Min. bending radius mm	OP at 20°C (stat.) bar	Weight per m kg
ATSE 006	6,1	6,7	9,3	9,9	0,75	18	172,0	0,140
ATSE 008	7,9	8,5	12,3	12,9	0,60	20	138,0	0,160
ATSE 010	9,5	10,2	12,8	14,5	0,65	20	138,0	0,152
ATSE 013	12,5	13,1	17,8	19,2	0,80	25	103,0	0,253
ATSE 016	15,7	16,4	21,8	24,0	0,80	51	83,0	0,304
ATSE 020	19,0	19,7	24,0	27,0	1,00	64	69,0	0,374
ATSE 025	25,5	26,2	32,2	36,1	1,00	89	46,0	0,543
ATSE 032	32,0	32,5	40,2	41,3	1,00	125	34,0	0,635
ATSE 040	38,0	38,9	47,8	49,0	1,00	152	30,0	0,840
ATSE 050	50,9	51,9	60,5	62,3	1,10	200	23,0	1,000


**Web:** <http://cat.hansa-flex.com/en/ATSE>

**Product versions:**

ATWE - PTFE corrugated hose, coil-corrugated PTFE inliner in white PTFE

## AFW

## PTFE corrugated hose



<b>Application:</b>	Low pressure applications with hydraulic fluids and aggressive media
<b>Application:</b>	Mainly for the chemical and food industries
<b>Design:</b>	coil-corrugated PTFE inliner in white PTFE
<b>Properties:</b>	The inliner flanged connection fittings impart good self-cleaning properties when media are passed through the hoses, The through-led product is only in contact with the PTFE material
<b>Hose material:</b>	PTFE (polytetrafluoroethylene)
<b>Braiding:</b>	without braiding
<b>Temp. min.:</b>	-70 °C
<b>Temp. max.:</b>	260 °C
<b>Temp.:</b>	applies for the hose only
<b>Approval:</b>	the base material has been granted FDA approval.

**Note:** The pressure values listed apply to hoses only.  
 The tubular fabric has a safety factor (SF) 3 against bursting  
 From 120 °C the pressure reduction factor is to be taken into account.  
 (Max. operating pressure = operating pressure x factor).  
 Temp.: 120 °C / 140 °C / 160 °C / 180 °C / 200 °C / 220 °C  
 Factor: 1,00 / 0,80 / 0,60 / 0,40 / 0,20 / 0,00

**Ordering information:** AFWA design with 1.4301 / 1.4306 stainless steel braiding upon request. AFWP design with polypropylene braiding (suitable for use up to max. 90°C) upon request.

Identification	Internal Ø min. mm	Internal Ø max. mm	External Ø min. mm	External Ø max. mm	Wall thickness mm	Min. bending radius mm	OP at 20°C (stat.) bar	Vacuum mbar	Weight per m kg
AFW 006	5,5	6,9	9,9	11,5	0,52	25	4,0	744	0,047
AFW 010	8,5	10,5	13,2	14,7	0,62	25	4,0	744	0,058
AFW 013	11,6	13,6	16,4	18,2	0,82	50	4,0	887	0,072
AFW 016	15,1	16,4	21,2	23,2	0,88	65	3,0	887	0,097
AFW 020	19,5	20,5	26,6	29,4	1,00	55	3,0	887	0,142
AFW 025	24,5	25,5	32,2	36,2	1,10	85	3,0	887	0,194
AFW 032	31,5	32,5	39,9	44,1	1,15	100	2,5	887	0,258
AFW 040	36,5	37,5	44,6	49,4	1,45	120	2,5	887	0,377
AFW 050	49,5	50,5	57,9	64,1	1,50	165	2,0	887	0,522
AFW 065	62,5	63,5	77,9	86,1	1,60	230	1,5	887	0,654
AFW 080	73,5	74,5	87,4	96,6	1,60	260	1,3	887	0,765
AFW 100	94,5	99,5	118,1	124,5	1,82	300	1,0	887	1,310

**Web:** <http://cat.hansa-flex.com/en/AFW>


**Product versions:**

AFS - PTFE corrugated hose, coil-corrugated PTFE inliner in black PTFE

## AFS

## PTFE corrugated hose

- Application:** Low pressure applications with hydraulic fluids and aggressive media
- Application:** Mainly for the chemical and food industries
- Design:** coil-corrugated PTFE inliner in black PTFE, antistatic design
- Properties:** The inliner flanged connection fittings impart good self-cleaning properties when media are passed through the hoses, The through-led product is only in contact with the PTFE material
- Hose material:** PTFE (polytetrafluoroethylene)
- Braiding:** without braiding
- Temp. min.:** -70 °C
- Temp. max.:** 260 °C
- Temp.:** applies for the hose only
- Approval:** the base material has been granted FDA approval.



**Note:** The pressure values listed apply to hoses only.  
The tubular fabric has a safety factor (SF) 3 against bursting  
From 120 °C the pressure reduction factor is to be taken into account.  
(Max. operating pressure = operating pressure x factor).  
Temp.: 120 °C / 140 °C / 160 °C / 180 °C / 200 °C / 220 °C  
Factor: 1,00 / 0,80 / 0,60 / 0,40 / 0,20 / 0,00

**Ordering information:** AFSA design with 1.4301 / 1.4306 stainless steel braiding upon request. AFSP design with polypropylene braiding (suitable for use up to max. 90°C) upon request.

Identification	Internal Ø min.	Internal Ø max.	External Ø min.	External Ø max.	Wall thickness	Min. bending radius	OP at 20°C (stat.)	Vacuum	Weight per m
	mm	mm	mm	mm	mm	mm	bar	mbar	kg
AFS 006	5,5	6,9	9,9	11,5	0,52	25	4,0	744	0,047
AFS 010	8,5	10,5	13,2	14,7	0,62	25	4,0	744	0,058
AFS 013	11,6	13,6	16,4	18,2	0,82	50	4,0	887	0,072
AFS 016	15,1	16,4	21,2	23,2	0,88	65	3,0	887	0,097
AFS 020	19,5	20,5	26,6	29,4	1,00	55	3,0	887	0,142
AFS 025	24,5	25,5	32,2	36,2	1,10	85	3,0	887	0,194
AFS 032	31,5	32,5	39,9	44,1	1,15	100	2,5	887	0,258
AFS 040	36,5	37,5	44,6	49,4	1,45	120	2,5	887	0,377
AFS 050	49,5	50,5	57,9	64,1	1,50	165	2,0	887	0,522
AFS 065	62,5	63,5	77,9	86,1	1,60	230	1,5	887	0,654
AFS 080	73,5	74,5	87,4	96,6	1,60	260	1,3	887	0,765
AFS 100	94,5	99,5	118,1	124,5	1,82	300	1,0	887	1,310

**Web:** <http://cat.hansa-flex.com/en/AFS>

**Product versions:**

AFW - PTFE corrugated hose, coil-corrugated PTFE inliner in white PTFE

## AVX

## Wound hose for exhaust gases

- Application:** Highly suitable for conveying exhaust gases
- Design:** wound metal hose, with metallic seal, multi-edged polygonal design
- Properties:** Special winding technology assures very low leakage and exceptional flexibility
- Temp. range:** can be used up to 400 °C
- Material:** Galvanised steel band



**Note:** Wound hoses are stretched for measurement.

**Ordering information:** Other sizes on request

Identification	Ø ID	Ø AD	Tolerances of ID/ED		Bending radius (+10 %)	Weight compressed (per m)
	mm	mm	mm		mm	kg
AVX 020	20,00	23,00	0,40		115	0,46
AVX 025	25,00	28,00	0,40		140	0,58
AVX 030	30,00	33,50	0,40		150	0,70
AVX 032	32,00	35,50	0,40		160	0,84
AVX 035	35,00	38,50	0,40		173	0,92
AVX 040	40,00	43,50	0,40		182	1,05
AVX 045	45,00	48,50	0,40		192	1,18
AVX 050	50,00	54,00	0,40		205	1,63
AVX 055	55,00	59,00	0,40		225	1,80
AVX 060	60,00	64,00	0,40		234	1,94
AVX 065	65,00	69,00	0,40		254	2,15
AVX 070	70,00	74,00	0,40		273	2,30
AVX 075	75,00	79,00	0,40		293	2,43
AVX 080	80,00	84,00	0,60		312	2,62

## AVX

(Continued)

## Wound hose for exhaust gases

Identification	Ø ID	Ø AD	Tolerances of ID/ED	Bending radius (+10 %)	Weight compressed (per m)
	mm	mm	mm	mm	kg
AVX 085	85,00	89,00	0,60	332	2,76
AVX 090	90,00	94,00	0,60	351	2,90
AVX 096	96,00	100,00	0,60	375	3,10
AVX 100	100,00	104,00	0,80	390	3,25
AVX 110	110,00	114,00	0,80	429	3,55
AVX 115	115,00	119,00	0,80	449	3,74
AVX 120	120,00	124,00	0,80	468	3,92
AVX 125	125,00	129,00	0,80	488	4,06
AVX 130	130,00	135,00	0,80	620	5,08
AVX 140	140,00	145,00	1,00	680	5,48
AVX 150	150,00	155,00	1,00	715	5,88
AVX 200	200,00	205,00	1,00	950	7,80

Web: <http://cat.hansa-flex.com/en/AVX>

## Product versions:

KAX - Wound hose for exhaust gases, Stainless steel strip 1.4301

## KAX

## Wound hose for exhaust gases



<b>Application:</b>	Highly suitable for conveying exhaust gases
<b>Design:</b>	wound hose, with metallic seal, multi-edged polygonal design
<b>Properties:</b>	Special winding technology assures very low leakage and exceptional flexibility
<b>Temp. range:</b>	can be used up to 650 °C
<b>Material:</b>	Stainless steel strip 1.4301

**Note:** Wound hoses are stretched for measurement.

**Ordering information:** Other sizes on request

Identification	Ø ID	Ø AD	Tolerances of ID/ED	Bending radius (+10 %)	Weight compressed (per m)
	mm	mm	mm	mm	kg
KAX 020	20,00	23,00	0,40	115	0,46
KAX 025	25,00	28,00	0,40	140	0,58
KAX 030	30,00	33,50	0,40	150	0,70
KAX 032	32,00	35,50	0,40	160	0,84
KAX 035	35,00	38,50	0,40	173	0,92
KAX 040	40,00	43,50	0,40	182	1,05
KAX 042	42,00	45,50	0,40	186	1,10
KAX 045	45,00	48,50	0,40	192	1,18
KAX 050	50,00	54,00	0,40	205	1,63
KAX 055	55,00	59,00	0,40	225	1,80
KAX 060	60,00	64,00	0,40	234	1,94
KAX 065	65,00	69,00	0,40	254	2,15
KAX 070	70,00	74,00	0,40	273	2,30
KAX 075	75,00	79,00	0,40	293	2,43
KAX 080	80,00	84,00	0,60	312	2,62
KAX 085	85,00	89,00	0,60	332	2,76
KAX 090	90,00	94,00	0,60	351	2,90
KAX 096	96,00	100,00	0,60	375	3,10
KAX 100	100,00	104,00	0,80	390	3,25
KAX 110	110,00	114,00	0,80	429	3,55
KAX 115	115,00	119,00	0,80	449	3,74
KAX 120	120,00	124,00	0,80	468	3,92
KAX 125	125,00	129,00	0,80	488	4,06
KAX 130	130,00	135,00	0,80	620	5,08
KAX 140	140,00	145,00	1,00	680	5,48
KAX 150	150,00	155,00	1,00	715	5,88

Web: <http://cat.hansa-flex.com/en/KAX>

## Product versions:

AVX - Wound hose for exhaust gases, Galvanised steel band

## UPG G

## Coolant hose

- Application:** Coolant and lubricant lines for metal chipping processes.  
**Design:** Steel support helix with PVC inner hose, steel screw-in taps on both sides, Surface nickel-plated  
**Properties:** Completely tight, can be bent into almost any position by hand, tough, resistant to oils, greases etc.



**Ordering information:** Other sizes on request

Identification	G1	G2	ID mm	S1 mm	Nominal length (+/-5 mm)
UPG G1/8-250	R 1/8"	R 1/8"	8,0	15,0	250
UPG G1/8-320	R 1/8"	R 1/8"	8,0	15,0	320
UPG G1/8-400	R 1/8"	R 1/8"	8,0	15,0	400
UPG G1/8-500	R 1/8"	R 1/8"	8,0	15,0	500
UPG G1/4-200	R 1/4"	R 1/4"	10,0	19,0	200
UPG G1/4-250	R 1/4"	R 1/4"	10,0	19,0	250
UPG G1/4-320	R 1/4"	R 1/4"	10,0	19,0	320
UPG G1/4-400	R 1/4"	R 1/4"	10,0	19,0	400
UPG G1/4-500	R 1/4"	R 1/4"	10,0	19,0	500
UPG G1/4-630	R 1/4"	R 1/4"	10,0	19,0	630
UPG G1/4-800	R 1/4"	R 1/4"	10,0	19,0	800
UPG G3/8-200	R 3/8"	R 3/8"	10,0	24,0	200
UPG G3/8-320	R 3/8"	R 3/8"	10,0	24,0	320
UPG G3/8-400	R 3/8"	R 3/8"	10,0	24,0	400
UPG G3/8-500	R 3/8"	R 3/8"	10,0	24,0	500
UPG G3/8-630	R 3/8"	R 3/8"	10,0	24,0	630
UPG G3/8-800	R 3/8"	R 3/8"	10,0	24,0	800
UPG G1/2-500	R 1/2"	R 1/2"	10,0	27,0	500
UPG G1/2-630	R 1/2"	R 1/2"	10,0	27,0	630
UPG G1/2-800	R 1/2"	R 1/2"	10,0	27,0	800

**Web:** <http://cat.hansa-flex.com/en/UPGG>

## NI AG

## Coolant hose

- Application:** Coolant and lubricant lines for metal chipping processes.  
**Design:** Steel support helix with PVC inner hose, Inlet side: Screw-in pin, Outlet side: Steel discharge nozzle, Surface nickel-plated  
**Properties:** Completely tight, can be bent into almost any position by hand, tough, resistant to oils, greases etc.



**Ordering information:** Other sizes on request

Identification	G1	ID mm	S1 mm	Nominal length (+/-5 mm)
NIAG 1/8-200	R 1/8"	8,0	15,0	200
NIAG 1/8-250	R 1/8"	8,0	15,0	250
NIAG 1/8-320	R 1/8"	8,0	15,0	320
NIAG 1/8-400	R 1/8"	8,0	15,0	400
NIAG 1/8-500	R 1/8"	8,0	15,0	500
NIAG 1/8-630	R 1/8"	8,0	15,0	630
NIAG 1/8-800	R 1/8"	8,0	15,0	800
NIAG 1/4-200	R 1/4"	10,0	19,0	200
NIAG 1/4-250	R 1/4"	10,0	19,0	250
NIAG 1/4-320	R 1/4"	10,0	19,0	320
NIAG 1/4-400	R 1/4"	10,0	19,0	400
NIAG 1/4-500	R 1/4"	10,0	19,0	500
NIAG 1/4-630	R 1/4"	10,0	19,0	630
NIAG 1/4-800	R 1/4"	10,0	19,0	800
NIAG 3/8-250	R 3/8"	10,0	24,0	250
NIAG 3/8-300	R 3/8"	10,0	24,0	300
NIAG 3/8-320	R 3/8"	10,0	24,0	320
NIAG 3/8-400	R 3/8"	10,0	24,0	400
NIAG 3/8-500	R 3/8"	10,0	24,0	500
NIAG 3/8-630	R 3/8"	10,0	24,0	630
NIAG 3/8-800	R 3/8"	10,0	24,0	800
NIAG 1/2-250	R 1/2"	12,0	27,0	250
NIAG 1/2-320	R 1/2"	12,0	27,0	320
NIAG 1/2-400	R 1/2"	12,0	27,0	400
NIAG 1/2-500	R 1/2"	12,0	27,0	500



## Coolant hose


Identification	G1	ID mm	S1 mm	Nominal length (+/-5 mm)
NIAG 1/2-630	R 1/2"	12,0	27,0	630
NIAG 1/2-800	R 1/2"	12,0	27,0	800

**Web:** <http://cat.hansa-flex.com/en/NIAG>

1

## KOMP-SW VA

## Stainless steel expansion joints with welding ends



<b>Application:</b>	Expansion joint for absorbing vibrations, of axial, lateral and angular movements, for welding into a pipeline
<b>Design:</b>	Bellows with multiple corrugations, multiple walls depending on nominal diameter and pressure rating, welding ends on both sides
<b>Material:</b>	Stainless steel bellows, Steel / stainless steel welding ends
<b>Temp. min.:</b>	-200 °C
<b>Temp. max.:</b>	550 °C

**Note:** Since these expansion joints are often not standard items, we refer customers to the variant selection on the expansion joint selection questionnaire (see additional documents).

With this information, of course we will then manufacture for you the expansion joint that is adapted perfectly to your needs.

**Ordering information:** The delivery period depends to a large degree on the material and design of the expansion joint.

**Identification**

Edelstahl-Komp. m. Schweißende


**Web:** <http://cat.hansa-flex.com/en/KOMP-SWVA>



## KOMP-LOS VA

## Stainless steel expansion joints with loose-type flanges

<b>Application:</b>	Expansion joint for absorbing vibrations
<b>Design:</b>	Bellows with multiple corrugations, multiple walls depending on nominal diameter and pressure rating, loose flanges on both sides
<b>Material:</b>	Stainless steel bellows, Steel / stainless steel loose flanges
<b>Temp. min.:</b>	-200 °C
<b>Temp. max.:</b>	550 °C



**Note:** Since these expansion joints are often not standard items, we refer customers to the variant selection on the expansion joint selection questionnaire (see additional documents).

With this information, of course we will then manufacture for you the expansion joint that is adapted perfectly to your needs.

**Ordering information:** The delivery period depends to a large degree on the material and design of the expansion joint.

**Identification**



Edelstahl-Komp. m. Losflansch

**Web:** <http://cat.hansa-flex.com/en/KOMPLOSVA>

## KOMP-LOS ELASTOMER

## Elastomer expansion joints with loose-type flanges

<b>Application:</b>	Expansion joint for absorbing vibrations, and noise
<b>Design:</b>	Single corrugation bellows with steel, nylon or aramid pressure carrier inserts., attached protrusions to receive two-sided loose flanges
<b>Material:</b>	Elastomer bellows, Steel / stainless steel loose flanges
<b>Temp. range:</b>	from -20 °C to 180 °C depending on the material



**Note:** Since these expansion joints are often not standard items, we refer customers to the variant selection on the expansion joint selection questionnaire (see additional documents).


With this information, of course we will then manufacture for you the expansion joint that is adapted perfectly to your needs.

**Ordering information:** The delivery period depends to a large degree on the material and design of the expansion joint.

**Identification**

Elastomer-Komp. m. Losflansch

**Web:** <http://cat.hansa-flex.com/en/KOMPLOSELASTOMER>

**KOMP-LOS PTFE****PTFE expansion joints with loose-type flanges**

<b>Application:</b>	Expansion joint to absorb expansion or as noise reducer, with low adjustment forces
<b>Design:</b>	Bellows with multiple corrugations, with stainless steel outer reinforcing rings, PTFE formed flange with loose flanges on both sides
<b>Material:</b>	PTFE bellows, Steel / stainless steel loose flanges
<b>Temp. min.:</b>	-50 °C
<b>Temp. max.:</b>	220 °C

**Note:** Since these expansion joints are often not standard items, we refer customers to the variant selection on the expansion joint selection questionnaire (see additional documents).

With this information, of course we will then manufacture for you the expansion joint that is adapted perfectly to your needs.

**Ordering information:** The delivery period depends to a large degree on the material and design of the expansion joint.

**Identification**

PTFE-Komp. m. Losflanschen

**Web:** <http://cat.hansa-flex.com/en/KOMPLOSPTFE>

**FBS****Silicate fabric heat protection hose**

Abrasion resistant and tear proof insulating fabric, asbestos free, loss on ignition approx. 2 %, good insulating properties due to low heat storage

**Application:** Foundries, steelworks, glassworks, shipyards etc.

**Properties:** excellent resistance to liquid metals, flying sparks, dross, resistant against oils, greases and solvents

**Application:** as contact protection for hot and cold hoses, for protection in the high temperature range, also particularly against liquid metals and splashed metal in the iron industry

**Colour:** bluish

**Temp. min.:** -25 °C

**Temp. max.:** 750 °C

**Material:** Calcium silicate fibres

Identification	Internal Ø mm
FBS 014	14
FBS 016	16
FBS 018	18
FBS 020	20
FBS 022	22
FBS 024	24
FBS 025	25
FBS 026	26
FBS 028	28
FBS 030	30
FBS 032	32
FBS 035	35
FBS 038	38
FBS 040	40
FBS 042	42
FBS 045	45
FBS 047	47
FBS 050	50
FBS 055	55
FBS 056	56
FBS 060	60
FBS 068	70
FBS 080	80
FBS 100	100
FBS 120	100
FBS 130	130

**Web:** <http://cat.hansa-flex.com/en/FBS>

## FBSB

## Heat protection hose, silicate, silicone

Provides outstanding protection against liquid metals and metal sprays.

**Application:** Foundries, steelworks, glassworks, shipyards etc.

**Application:** as contact protection for hot and cold hoses

**Colour:** smooth, rust red

**Temp. min.:** -65 °C

**Temp. max.:** 260 °C

**Temp.:** from inner diameter 6 mm to 127 mm: 1090 °C for 15-20 min. ; 1650 °C for 15-30 sec.; from inner diameter 160 mm: max. 300 °C

**Material:** Calcium silicate fibres with a silicone cover



**Note:** internal diameter 13 mm to 127 mm: Approvals: Germanischer Lloyd, DIN 5510-2 & MSHA, Above internal diameter 160 mm: Approval Germanischer Lloyd

Identification	Internal Ø mm
FBSB 006	6
FBSB 008	8
FBSB 010	10
FBSB 013	13
FBSB 016	16
FBSB 019	19
FBSB 022	22
FBSB 025	25
FBSB 029	29
FBSB 032	32
FBSB 035	35
FBSB 038	38
FBSB 041	41
FBSB 044	44
FBSB 051	51
FBSB 057	57
FBSB 064	64
FBSB 070	70
FBSB 076	76
FBSB 083	83
FBSB 089	89
FBSB 095	95
FBSB 102	102
FBSB 114	114
FBSB 127	127
FBSB 160	160
FBSB 170	170
FBSB 180	180
FBSB 200	200
FBSB 220	220
FBSB 250	250
FBSB 300	300

**Web:** <http://cat.hansa-flex.com/en/FBSB>

## FBSS

## Heat protection hose, glass-fibre, silicone

Good resistance to UV radiation, ozone, oxygen and thermal shocks, excellent aging resistance in hot environments. Provides outstanding protection against liquid metals and metal sprays.

**Application:** Foundries, steelworks, glassworks, shipyards etc.

**Application:** as contact protection for hot and cold hoses

**Colour:** brown

**Temp. min.:** -60 °C

**Temp. max.:** 250 °C

**Material:** Glass silk fabric coated with colourless silicone lacquer



Identification	Internal Ø mm	External Ø mm	Wall thickness mm
FBSS 015	15	16,2	0,6
FBSS 018	18	18,4	0,7
FBSS 020	20	21,4	0,7
FBSS 025	25	26,4	0,7
FBSS 030	30	31,4	0,7
FBSS 035	35	36,4	0,7
FBSS 040	40	41,6	0,8
FBSS 042	42	43,6	0,8
FBSS 045	45	46,6	0,8
FBSS 050	50	51,6	0,8

**Web:** <http://cat.hansa-flex.com/en/FBSS>

## FBSG

## Heat protection hose, silicate, silicone



Core is braided hose of Silontex yarn, textured and twisted, wall thickness approx. 3 mm, grey silicone cover outside, flame-resistant, self-extinguishing, approx. 50° Shore

**Application:** Foundries, steelworks, glassworks, shipyards etc.  
**Application:** as contact protection for hot and cold hoses  
**Colour:** grey  
**Temp. max.:** 300 °C  
**Material:** Silontex yarn with a silicone cover

**Note:** Approval by Germanischer Lloyd

Identification	Internal Ø mm	Weight per m
		kg
FBSG 010	10	0,232
FBSG 015	15	0,243
FBSG 020	20	0,323
FBSG 022	22	0,335
FBSG 025	25	0,360
FBSG 030	30	0,391
FBSG 032	32	0,430
FBSG 035	35	0,471
FBSG 040	40	0,541
FBSG 050	50	0,716
FBSG 060	60	0,860

**Web:** <http://cat.hansa-flex.com/en/FBSG>

## SSA

## Abrasion protection, Agraff, VA



**Application:** as external protection for hose lines and / or for reinforcing the bending radius.  
**Design:** hooked profile in crimped stainless steel  
**Temp. min.:** -200 °C  
**Temp. max.:** 550 °C  
**Material:** Stainless steel 1.4301

**Ordering information:** Other sizes on request

Identification	Ø ID	Ø AD	Tolerances of ID/ED	Weight per m	Min. bending radius
	mm		mm	kg	mm
SSA 005	5,00	7,00	0,20	0,066	30
SSA 006	6,00	8,00	0,20	0,079	35
SSA 007	7,00	9,00	0,20	0,093	40
SSA 008	8,00	11,00	0,20	0,141	40
SSA 009	9,00	12,00	0,20	0,159	45
SSA 010	10,00	13,00	0,20	0,177	50
SSA 011	11,00	14,00	0,20	0,195	55
SSA 012	12,00	15,00	0,20	0,213	65
SSA 013	13,00	16,00	0,20	0,230	70
SSA 014	14,00	17,00	0,20	0,248	75
SSA 015	15,00	18,00	0,20	0,265	80
SSA 016	16,00	19,00	0,20	0,283	82
SSA 017	17,00	20,00	0,20	0,301	85
SSA 018	18,00	21,00	0,20	0,319	90
SSA 019	19,00	23,00	0,30	0,380	95
SSA 020	20,00	24,00	0,30	0,400	100
SSA 021	21,00	25,00	0,30	0,420	105
SSA 022	22,00	26,00	0,30	0,440	110
SSA 023	23,00	27,00	0,30	0,460	115
SSA 024	24,00	28,00	0,30	0,480	120
SSA 025	25,00	29,00	0,30	0,500	125
SSA 026	26,00	30,00	0,30	0,520	130
SSA 027	27,00	31,00	0,30	0,540	135
SSA 028	28,00	32,00	0,30	0,560	140
SSA 029	29,00	33,00	0,30	0,580	145
SSA 030	30,00	34,00	0,40	0,600	150
SSA 032	32,00	36,00	0,40	0,640	160
SSA 035	35,00	39,00	0,40	0,680	165
SSA 036	36,00	40,00	0,40	0,720	170
SSA 038	38,00	42,00	0,40	0,760	175
SSA 040	40,00	44,00	0,40	0,790	180
SSA 042	42,00	46,00	0,40	0,807	185
SSA 045	45,00	49,00	0,40	0,884	195
SSA 048	48,00	52,00	0,40	0,922	200



(Continued)

SSA

## Abrasion protection, Agraff, VA

Identification	Ø ID mm	Ø AD mm	Tolerances of ID/ED mm	Weight per m kg	Min. bending radius mm
SSA 050	50,00	54,00	0,50	0,960	205
SSA 052	52,00	56,00	0,50	0,999	215
SSA 055	55,00	59,40	0,50	1,330	270
SSA 058	58,00	62,40	0,50	1,830	272
SSA 060	60,00	66,00	0,60	1,870	200
SSA 065	65,00	71,00	0,60	2,025	210
SSA 070	70,00	76,00	0,60	2,180	240
SSA 075	75,00	81,00	0,60	2,340	260
SSA 080	80,00	86,00	0,60	2,500	270
SSA 090	90,00	98,00	0,80	2,800	300
SSA 100	100,00	108,00	0,80	3,120	340

Web: <http://cat.hansa-flex.com/en/SSA>

SSR

## Abrasion protection, round



Round spring steel wire protective helix protects the hose against extreme external abrasion.

**Application:** Hose lines that are subjected to a shearing load during movement.

**Application:** as external protection for hose lines and / or for reinforcing the bending radius.

**Material:** Steel


**Surface:** electro galvanised



Identification	Ø ID mm	Ø AD mm	Wire Ø mm
SSR 14-2	14,00	18,00	2,0
SSR 18-2	18,00	22,00	2,0
SSR 20-2	20,00	24,00	2,0
SSR 23-2	23,00	27,00	2,0
SSR 25-2	25,00	29,00	2,0
SSR 27-2	27,00	31,00	2,0
SSR 27-2.5	27,00	32,00	2,5
SSR 30-2	30,00	34,00	2,0
SSR 34-3	34,00	40,00	3,0
SSR 41-3	41,00	47,00	3,0
SSR 48-3	48,00	54,00	3,0
SSR 51-3	51,00	57,00	3,0
SSR 52-3	52,00	58,00	3,0
SSR 54-3	54,00	60,00	3,0
SSR 56-3	56,00	62,00	3,0
SSR 68-3	68,00	74,00	3,0
SSR 73-3	73,00	79,00	3,0

Web: <http://cat.hansa-flex.com/en/SSR>**Product versions:**

SSR VA - Abrasion protection, round, VA, Stainless steel

**SSR VA****Abrasion protection, round, VA**

Round spring steel wire protective helix protects the hose against extreme external abrasion.

**Application:** Hose lines that are subjected to a shearing load during movement.

**Application:** as external protection for hose lines and / or for reinforcing the bending radius.

**Material:** Stainless steel

**Ordering information:** Other sizes on request

Identification	Ø ID mm	Ø AD mm	Wire Ø mm
SSR 06-0.5 VA	6,00	7,00	0,5
SSR 11-1 VA	11,00	13,00	1,0
SSR 14-2 VA	14,00	18,00	2,0
SSR 15-2 VA	15,00	19,00	2,0
SSR 20-2 VA	20,00	24,00	2,0
SSR 23-2 VA	23,00	27,00	2,0
SSR 23.5-2.5 VA	23,50	28,50	2,5
SSR 26-2 VA	26,00	30,00	2,0
SSR 27-2 VA	27,00	31,00	2,0
SSR 35-2 VA	35,00	39,00	2,0
SSR 37-2 VA	37,00	41,00	2,0
SSR 40-2 VA	40,00	44,00	2,0
SSR 41-3 VA	41,00	47,00	3,0
SSR 45-3 VA	45,00	51,00	3,0
SSR 48-3 VA	48,00	54,00	3,0
SSR 54-2.5 VA	54,00	59,00	2,5
SSR 55-3 VA	55,00	61,00	3,0
SSR 61-4 VA	61,00	69,00	4,0
SSR 70-4.5 VA	70,00	79,00	4,5
SSR 85-3 VA	85,00	91,00	3,0
SSR 91-6 VA	91,00	103,00	6,0
SSR 93-4 VA	93,00	101,00	4,0
SSR 105-5 VA	105,00	115,00	5,0
SSR 130-4 VA	130,00	138,00	4,0
SSR 135-4 VA	135,00	143,00	4,0

**Web:** <http://cat.hansa-flex.com/en/SSRVA>

**Product versions:**

SSR - Abrasion protection, round, Steel






# Hose fittings



**Metal hose connectors**

Metric connectors	48
Imperial connectors	55
Pipe connectors	64
Fittings	67
Fittings for the food industry	77
Flange connections	80

**WA A****Connector ... A, steel**

<b>Application:</b>	Connection fitting for metal hoses
<b>Connection 1:</b>	metric nut thread
<b>Sealing form 1:</b>	Spherical liner
<b>Standard:</b>	DIN 3863
<b>Short code:</b>	DKM
<b>Construction:</b>	straight
<b>Material:</b>	Steel

**Note:** Welded variant in stainless steel only Width across flats values are listed for reference purposes!


**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G1	S1 mm
WA 020 A	20	63	M 30 x 1.5	36,0
WA 025 A	25	63	M 38 x 1.5	46,0
WA 032 A	32	63	M 45 x 1.5	55,0
WA 040 A	40	40	M 52 x 1.5	60,0
WA 050 A	50	40	M 65 x 2	70,0
WA 065 A	65	40	M 78 x 2	90,0

**Web:** <http://cat.hansa-flex.com/en/WAA>

**Product versions:**

**WA A VA** - Connector ... A, VA, Stainless steel

**WA A VA****Connector ... A, VA**

<b>Application:</b>	Connection fitting for metal hoses
<b>Connection 1:</b>	metric nut thread
<b>Sealing form 1:</b>	Spherical liner
<b>Standard:</b>	DIN 3863
<b>Short code:</b>	DKM
<b>Construction:</b>	straight
<b>Material:</b>	Stainless steel

**Note:** Width across flats values are listed for reference purposes!

**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G1	S1 mm
WA 020 A VA	20	63	M 30 x 1.5	36,0
WA 025 A VA	25	63	M 38 x 1.5	46,0
WA 032 A VA	32	63	M 45 x 1.5	55,0
WA 040 A VA	40	40	M 52 x 1.5	60,0
WA 050 A VA	50	40	M 65 x 2	70,0
WA 065 A VA	65	40	M 78 x 2	90,0

**Web:** <http://cat.hansa-flex.com/en/WAAVA>


**Product versions:**

**WA A** - Connector ... A, steel, Steel

## WA AFL

## Connector ... AFL, steel

**Application:** Connection fitting for metal hoses  
**Connection 1:** metric nut thread  
**Sealing form 1:** 24° outer cone  
**Standard:** matching connector adapter according to DIN 2353 / DIN EN ISO 8434-1  
**Short code:** DKL  
**Construction:** straight  
**Series:** light  
**Material:** Steel (weldable)



**Note:** Width across flats values are listed for reference purposes!

**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G1	Series	S1 mm
WA 004 AFL	4	250	M 12 x 1.5	6 L	17,0
WA 006 AFL	6	250	M 14 x 1.5	8 L	19,0
WA 008 AFL	8	250	M 16 x 1.5	10 L	22,0
WA 010 AFL	10	250	M 18 x 1.5	12 L	22,0
WA 013 AFL	13	250	M 22 x 1.5	15 L	27,0
WA 016 AFL	16	160	M 26 x 1.5	18 L	32,0
WA 020 AFL	20	160	M 30 x 2	22 L	36,0
WA 025 AFL	25	100	M 36 x 2	28 L	41,0
WA 032 AFL	32	100	M 45 x 2	35 L	50,0
WA 040 AFL	40	100	M 52 x 2	42 L	60,0

**Web:** <http://cat.hansa-flex.com/en/WAAFL>


**Product versions:**

WA AFL VA - Connector ... AFL, VA, Stainless steel

## WA AFL VA

## Connector ... AFL, VA

**Application:** Connection fitting for metal hoses  
**Connection 1:** metric nut thread  
**Sealing form 1:** 24° outer cone  
**Standard:** matching connector adapter according to DIN 2353 / DIN EN ISO 8434-1  
**Short code:** DKL  
**Construction:** straight  
**Series:** light  
**Material:** Stainless steel



**Note:** Width across flats values are listed for reference purposes!


**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G1	Series	S1 mm
WA 004 AFL VA	4	250	M 12 x 1.5	6 L	14,0
WA 006 AFL VA	6	250	M 14 x 1.5	8 L	17,0
WA 008 AFL VA	8	250	M 16 x 1.5	10 L	19,0
WA 010 AFL VA	10	250	M 18 x 1.5	12 L	22,0
WA 013 AFL VA	13	250	M 22 x 1.5	15 L	27,0
WA 016 AFL VA	16	160	M 26 x 1.5	18 L	32,0
WA 020 AFL VA	20	160	M 30 x 2	22 L	36,0
WA 025 AFL VA	25	100	M 36 x 2	28 L	41,0
WA 032 AFL VA	32	100	M 45 x 2	35 L	50,0
WA 040 AFL VA	40	100	M 52 x 2	42 L	60,0

**Web:** <http://cat.hansa-flex.com/en/WAAFLVA>

**Product versions:**

WA AFL - Connector ... AFL, steel, Steel (weldable)

**WA AOL****Connector ... AOL, steel**

<b>Application:</b>	Connection fitting for metal hoses
<b>Connection 1:</b>	metric nut thread
<b>Sealing form 1:</b>	24° outer cone with O-ring
<b>Standard:</b>	DIN 3865, ISO 8434-1
<b>Short code:</b>	DKOL
<b>Construction:</b>	straight
<b>Series:</b>	light
<b>Material:</b>	Steel (weldable)

**Note:** Width across flats values are listed for reference purposes!


**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G1	Series	S1 mm
WA 004 AOL	4	250	M 12 x 1.5	6 L	14,0
WA 006 AOL	6	250	M 14 x 1.5	8 L	17,0
WA 008 AOL	8	250	M 16 x 1.5	10 L	19,0
WA 010 AOL	10	250	M 18 x 1.5	12 L	22,0
WA 013 AOL	13	250	M 22 x 1.5	15 L	27,0
WA 016 AOL	16	160	M 26 x 1.5	18 L	32,0
WA 020 AOL	20	160	M 30 x 2	22 L	36,0
WA 025 AOL	25	100	M 36 x 2	28 L	41,0
WA 032 AOL	32	100	M 45 x 2	35 L	50,0
WA 040 AOL	40	100	M 52 x 2	42 L	60,0

**Web:** <http://cat.hansa-flex.com/en/WAAOL>

**Product versions:**

**WA AOL VA** - Connector ... AOL, VA, Stainless steel

**WA AOL VA****Connector ... AOL, VA**

<b>Application:</b>	Connection fitting for metal hoses
<b>Connection 1:</b>	metric nut thread
<b>Sealing form 1:</b>	24° outer cone with O-ring
<b>Standard:</b>	DIN 3865, ISO 8434-1
<b>Short code:</b>	DKOL
<b>Construction:</b>	straight
<b>Series:</b>	light
<b>Material:</b>	Stainless steel

**Note:** Width across flats values are listed for reference purposes!

**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G1	Series	S1 mm
WA 004 AOL VA	4	250	M 12 x 1.5	6 L	14,0
WA 006 AOL VA	6	250	M 14 x 1.5	8 L	17,0
WA 008 AOL VA	8	250	M 16 x 1.5	10 L	19,0
WA 010 AOL VA	10	250	M 18 x 1.5	12 L	22,0
WA 013 AOL VA	13	250	M 22 x 1.5	15 L	27,0
WA 016 AOL VA	16	160	M 26 x 1.5	18 L	32,0
WA 020 AOL VA	20	160	M 30 x 2	22 L	36,0
WA 025 AOL VA	25	100	M 36 x 2	28 L	41,0
WA 032 AOL VA	32	100	M 45 x 2	35 L	50,0
WA 040 AOL VA	40	100	M 52 x 2	42 L	60,0

**Web:** <http://cat.hansa-flex.com/en/WAAOLVA>


**Product versions:**

**WA AOL** - Connector ... AOL, steel, Steel (weldable)

## WA HL

## Connector ... HL, steel

**Application:** Connection fitting for metal hoses  
**Connection 1:** metric cylindrical outer thread  
**Sealing form 1:** 24° inner cone  
**Standard:** DIN 2353, ISO 8434-1  
**Short code:** CEL  
**Construction:** straight  
**Series:** light  
**Material:** Steel (weldable)



**Note:** Width across flats values are listed for reference purposes!

**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G1	Series	AF mm
WA 004 HL	4	250	M 12 x 1.5	6 L	14
WA 006 HL	6	250	M 14 x 1.5	8 L	17
WA 008 HL	8	250	M 16 x 1.5	10 L	17
WA 010 HL	10	250	M 18 x 1.5	12 L	19
WA 013 HL	13	250	M 22 x 1.5	15 L	22
WA 016 HL	16	160	M 26 x 1.5	18 L	27
WA 020 HL	20	160	M 30 x 2	22 L	32
WA 025 HL	25	100	M 36 x 2	28 L	41
WA 032 HL	32	100	M 45 x 2	35 L	46
WA 040 HL	40	100	M 52 x 2	42 L	55

**Web:** <http://cat.hansa-flex.com/en/WAHL>


**Product versions:**

WA HL VA - Connector ... HL, VA, Stainless steel

## WA HL VA

## Connector ... HL, VA

**Application:** Connection fitting for metal hoses  
**Connection 1:** metric cylindrical outer thread  
**Sealing form 1:** 24° inner cone  
**Standard:** DIN 2353, ISO 8434-1  
**Short code:** CEL  
**Construction:** straight  
**Series:** light  
**Material:** Stainless steel



**Note:** Width across flats values are listed for reference purposes!


**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G1	Series	AF mm
WA 004 HL VA	4	250	M 12 x 1.5	6 L	14
WA 006 HL VA	6	250	M 14 x 1.5	8 L	17
WA 008 HL VA	8	250	M 16 x 1.5	10 L	17
WA 010 HL VA	10	250	M 18 x 1.5	12 L	19
WA 013 HL VA	13	250	M 22 x 1.5	15 L	22
WA 016 HL VA	16	160	M 26 x 1.5	18 L	27
WA 020 HL VA	20	160	M 30 x 2	22 L	32
WA 025 HL VA	25	100	M 36 x 2	28 L	41
WA 032 HL VA	32	100	M 45 x 2	35 L	46
WA 040 HL VA	40	100	M 52 x 2	42 L	55

**Web:** <http://cat.hansa-flex.com/en/WAHLVA>

**Product versions:**

WA HL - Connector ... HL, steel, Steel (weldable)

**WA AFS****Connector ... AFS, steel**

**Application:** Connection fitting for metal hoses  
**Connection 1:** metric nut thread  
**Sealing form 1:** 24° outer cone  
**Standard:** matching connector adapter according to DIN 2353 / DIN EN ISO 8434-1  
**Short code:** DKS  
**Construction:** straight  
**Series:** heavy  
**Material:** Steel

**Note:** Welded variant in stainless steel only Width across flats values are listed for reference purposes!


**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G1	Series	S1 mm
WA 004 AFS	4	630	M 16 x 1.5	8S	19,0
WA 006 AFS	6	630	M 18 x 1.5	10 S	22,0
WA 008 AFS	8	630	M 20 x 1.5	12 S	24,0
WA 010 AFS	10	630	M 22 x 1.5	14 S	27,0
WA 013 AFS	13	400	M 24 x 1.5	16 S	30,0
WA 016 AFS	16	400	M 30 x 2	20 S	36,0
WA 020 AFS	20	400	M 36 x 2	25 S	41,0
WA 025 AFS	25	250	M 42 x 2	30 S	50,0
WA 032 AFS	32	250	M 52 x 2	38 S	60,0

**Web:** <http://cat.hansa-flex.com/en/WAAFS>

**Product versions:**

**WA AFS VA** - Connector ... AFS, VA, Stainless steel

**WA AFS VA****Connector ... AFS, VA**

**Application:** Connection fitting for metal hoses  
**Connection 1:** metric nut thread  
**Sealing form 1:** 24° outer cone  
**Standard:** matching connector adapter according to DIN 2353 / DIN EN ISO 8434-1  
**Short code:** DKS  
**Construction:** straight  
**Series:** heavy  
**Material:** Stainless steel

**Note:** Width across flats values are listed for reference purposes!

**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G1	Series	S1 mm
WA 004 AFS VA	4	630	M 16 x 1.5	8S	19,0
WA 006 AFS VA	6	630	M 18 x 1.5	10 S	22,0
WA 008 AFS VA	8	630	M 20 x 1.5	12 S	24,0
WA 010 AFS VA	10	630	M 22 x 1.5	14 S	27,0
WA 013 AFS VA	13	400	M 24 x 1.5	16 S	30,0
WA 016 AFS VA	16	400	M 30 x 2	20 S	36,0
WA 020 AFS VA	20	400	M 36 x 2	25 S	46,0
WA 025 AFS VA	25	250	M 42 x 2	30 S	50,0
WA 032 AFS VA	32	250	M 52 x 2	38 S	60,0

**Web:** <http://cat.hansa-flex.com/en/WAAFSVA>


**Product versions:**

**WA AFS** - Connector ... AFS, steel, Steel

## WA AOS

## Connector ... AOS, steel

**Application:** Connection fitting for metal hoses  
**Connection 1:** metric nut thread  
**Sealing form 1:** 24° outer cone with O-ring  
**Standard:** DIN 3865, ISO 8434-1  
**Short code:** DKOS  
**Construction:** straight  
**Series:** heavy  
**Material:** Steel (weldable)



**Note:** Width across flats values are listed for reference purposes!

**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G1	Series	S1 mm
WA 004 AOS	4	630	M 16 x 1.5	8S	19,0
WA 006 AOS	6	630	M 18 x 1.5	10 S	22,0
WA 008 AOS	8	630	M 20 x 1.5	12 S	24,0
WA 010 AOS	10	630	M 22 x 1.5	14 S	27,0
WA 013 AOS	13	400	M 24 x 1.5	16 S	30,0
WA 016 AOS	16	400	M 30 x 2	20 S	36,0
WA 020 AOS	20	400	M 36 x 2	25 S	46,0
WA 025 AOS	25	250	M 42 x 2	30 S	50,0
WA 032 AOS	32	250	M 52 x 2	38 S	60,0

**Web:** <http://cat.hansa-flex.com/en/WAAOS>


**Product versions:**

**WA AOS VA** - Connector ... AOS, VA, Stainless steel

## WA AOS VA

## Connector ... AOS, VA

**Application:** Connection fitting for metal hoses  
**Connection 1:** metric nut thread  
**Sealing form 1:** 24° outer cone with O-ring  
**Standard:** DIN 3865, ISO 8434-1  
**Short code:** DKOS  
**Construction:** straight  
**Series:** heavy  
**Material:** Stainless steel



**Note:** Width across flats values are listed for reference purposes!


**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G1	Series	S1 mm
WA 004 AOS VA	4	630	M 16 x 1.5	8S	19,0
WA 006 AOS VA	6	630	M 18 x 1.5	10 S	22,0
WA 008 AOS VA	8	630	M 20 x 1.5	12 S	24,0
WA 010 AOS VA	10	630	M 22 x 1.5	14 S	27,0
WA 013 AOS VA	13	400	M 24 x 1.5	16 S	30,0
WA 016 AOS VA	16	400	M 30 x 2	20 S	36,0
WA 020 AOS VA	20	400	M 36 x 2	25 S	46,0
WA 025 AOS VA	25	250	M 42 x 2	30 S	50,0
WA 032 AOS VA	32	250	M 52 x 2	38 S	60,0

**Web:** <http://cat.hansa-flex.com/en/WAAOSVA>

**Product versions:**

**WA AOS** - Connector ... AOS, steel, Steel (weldable)

**WA HS****Connector ... HS, steel**

**Application:** Connection fitting for metal hoses  
**Connection 1:** metric cylindrical outer thread  
**Sealing form 1:** 24° inner cone  
**Standard:** DIN 2353, ISO 8434-1  
**Short code:** CES  
**Construction:** straight  
**Series:** heavy  
**Material:** Steel (weldable)

**Note:** Width across flats values are listed for reference purposes!


**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G1	Series	AF mm
WA 004 HS	4	630	M 16 x 1.5	8S	17
WA 006 HS	6	630	M 18 x 1.5	10 S	19
WA 008 HS	8	630	M 20 x 1.5	12 S	22
WA 010 HS	10	630	M 22 x 1.5	14 S	24
WA 013 HS	13	400	M 24 x 1.5	16 S	27
WA 016 HS	16	400	M 30 x 2	20 S	32
WA 020 HS	20	400	M 36 x 2	25 S	36
WA 025 HS	25	250	M 42 x 2	30 S	46
WA 032 HS	32	250	M 52 x 2	38 S	55

**Web:** <http://cat.hansa-flex.com/en/WAHS>

**Product versions:**

**WA HS VA** - Connector ... HS, VA, Stainless steel

**WA HS VA****Connector ... HS, VA**

**Application:** Connection fitting for metal hoses  
**Connection 1:** metric cylindrical outer thread  
**Sealing form 1:** 24° inner cone  
**Standard:** DIN 2353, ISO 8434-1  
**Short code:** CES  
**Construction:** straight  
**Series:** heavy  
**Material:** Stainless steel

**Note:** Width across flats values are listed for reference purposes!

**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G1	Series	AF mm
WA 004 HS VA	4	630	M 16 x 1.5	8S	17
WA 006 HS VA	6	630	M 18 x 1.5	10 S	19
WA 008 HS VA	8	630	M 20 x 1.5	12 S	22
WA 010 HS VA	10	630	M 22 x 1.5	14 S	24
WA 013 HS VA	13	400	M 24 x 1.5	16 S	27
WA 016 HS VA	16	400	M 30 x 2	20 S	32
WA 020 HS VA	20	400	M 36 x 2	25 S	36
WA 025 HS VA	25	250	M 42 x 2	30 S	46
WA 032 HS VA	32	250	M 52 x 2	38 S	55

**Web:** <http://cat.hansa-flex.com/en/WAHSVA>

**Product versions:**


**WA HS** - Connector ... HS, steel, Steel (weldable)



## WA AB

## Connector ... AB, steel

**Application:** Connection fitting for metal hoses  
**Connection 1:** BSP nut thread  
**Sealing form 1:** 60° outer cone  
**Standard:** ISO 228-1, ISO 8434-6, BS 5200  
**Short code:** DKR  
**Construction:** straight  
**Material:** Steel (weldable)



**Note:** Width across flats values are listed for reference purposes!

**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G1	S1 mm
WA 006 AB	6	350	G 1/4"	19,0
WA 010 AB	10	350	G 3/8"	22,0
WA 013 AB	13	315	G 1/2"	27,0
WA 016 AB	16	315	G 5/8"	30,0
WA 020 AB	20	250	G 3/4"	32,0
WA 025 AB	25	200	G 1"	41,0
WA 032 AB	32	160	G 1 1/4"	50,0
WA 040 AB	40	125	G 1 1/2"	55,0
WA 050 AB	50	80	G 2"	70,0

**Web:** <http://cat.hansa-flex.com/en/WAAB>


**Product versions:**

**WA AB VA** - Connector ... AB, VA, Stainless steel

## WA AB VA

## Connector ... AB, VA

**Application:** Connection fitting for metal hoses  
**Connection 1:** BSP nut thread  
**Sealing form 1:** 60° outer cone  
**Standard:** ISO 228-1, ISO 8434-6, BS 5200  
**Short code:** DKR  
**Construction:** straight  
**Material:** Stainless steel



**Note:** Width across flats values are listed for reference purposes!


**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G1	S1 mm
WA 006 AB VA	6	350	G 1/4"	19,0
WA 010 AB VA	10	350	G 3/8"	22,0
WA 013 AB VA	13	315	G 1/2"	27,0
WA 016 AB VA	16	315	G 5/8"	30,0
WA 020 AB VA	20	250	G 3/4"	32,0
WA 025 AB VA	25	200	G 1"	41,0
WA 032 AB VA	32	160	G 1 1/4"	50,0
WA 040 AB VA	40	125	G 1 1/2"	55,0
WA 050 AB VA	50	80	G 2"	70,0

**Web:** <http://cat.hansa-flex.com/en/WAABVA>

**Product versions:**

**WA AB** - Connector ... AB, steel, Steel (weldable)

**WA HB****Connector ... HB, steel**

**Application:** Connection fitting for metal hoses  
**Connection 1:** BSP external thread, cylindrical  
**Sealing form 1:** 60° inner cone  
**Standard:** ISO 228-1, ISO 8434-6, BS 5200  
**Short code:** AGR  
**Construction:** straight  
**Material:** Steel

**Note:** Welded variant in stainless steel only Width across flats values are listed for reference purposes!


**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G1	AF mm
WA 006 HB	6	350	G 1/4"	19
WA 010 HB	10	350	G 3/8"	22
WA 013 HB	13	315	G 1/2"	27
WA 016 HB	16	315	G 5/8"	30
WA 020 HB	20	250	G 3/4"	32
WA 025 HB	25	200	G 1"	41
WA 032 HB	32	160	G 1 1/4"	50
WA 040 HB	40	125	G 1 1/2"	55
WA 050 HB	50	80	G 2"	70

**Web:** <http://cat.hansa-flex.com/en/WAHB>

**Product versions:**

**WA HB VA** - Connector ... HB, VA, Stainless steel

**WA HB VA****Connector ... HB, VA**

**Application:** Connection fitting for metal hoses  
**Connection 1:** BSP external thread, cylindrical  
**Sealing form 1:** 60° inner cone  
**Standard:** ISO 228-1, ISO 8434-6, BS 5200  
**Short code:** AGR  
**Construction:** straight  
**Material:** Stainless steel

**Note:** Width across flats values are listed for reference purposes!

**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G1	AF mm
WA 006 HB VA	6	350	G 1/4"	19
WA 010 HB VA	10	350	G 3/8"	22
WA 013 HB VA	13	315	G 1/2"	27
WA 016 HB VA	16	315	G 5/8"	30
WA 020 HB VA	20	250	G 3/4"	32
WA 025 HB VA	25	200	G 1"	41
WA 032 HB VA	32	160	G 1 1/4"	50
WA 040 HB VA	40	125	G 1 1/2"	55
WA 050 HB VA	50	80	G 2"	70

**Web:** <http://cat.hansa-flex.com/en/WAHBVA>


**Product versions:**

**WA HB** - Connector ... HB, steel, Steel

## WA AR

## Connector ... AR, steel

**Application:** Connection fitting for metal hoses  
**Connection 1:** BSP nut thread  
**Sealing form 1:** flat sealing  
**Standard:** ISO 228-1  
**Short code:** DKR flat  
**Construction:** straight  
**Material:** Steel (weldable)



**Note:** Width across flats values are listed for reference purposes!

**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G1	S1 mm
WA 006 AR	6	350	G 1/4"	19,0
WA 010 AR	10	350	G 3/8"	22,0
WA 013 AR	13	315	G 1/2"	27,0
WA 016 AR	16	315	G 5/8"	30,0
WA 020 AR	20	250	G 3/4"	32,0
WA 025 AR	25	200	G 1"	41,0
WA 032 AR	32	160	G 1 1/4"	50,0
WA 040 AR	40	125	G 1 1/2"	55,0
WA 050 AR	50	80	G 2"	70,0

**Web:** <http://cat.hansa-flex.com/en/WAAR>


**Product versions:**

**WA AR VA** - Connector ... AR, VA, Stainless steel

## WA AR VA

## Connector ... AR, VA

**Application:** Connection fitting for metal hoses  
**Connection 1:** BSP nut thread  
**Sealing form 1:** flat sealing  
**Standard:** ISO 228-1  
**Short code:** DKR flat  
**Construction:** straight  
**Material:** Stainless steel



**Note:** Width across flats values are listed for reference purposes!


**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G1	S1 mm
WA 006 AR VA	6	350	G 1/4"	19,0
WA 010 AR VA	10	350	G 3/8"	22,0
WA 013 AR VA	13	315	G 1/2"	27,0
WA 016 AR VA	16	315	G 5/8"	30,0
WA 020 AR VA	20	250	G 3/4"	32,0
WA 025 AR VA	25	200	G 1"	41,0
WA 032 AR VA	32	160	G 1 1/4"	50,0
WA 040 AR VA	40	125	G 1 1/2"	55,0
WA 050 AR VA	50	80	G 2"	70,0
WA 065 AR VA	65	16	G 2.1/2"	85,0
WA 080 AR VA	80	16	G 3"	100,0

**Web:** <http://cat.hansa-flex.com/en/WAARVA>

**Product versions:**

**WA AR** - Connector ... AR, steel, Steel (weldable)

**WA HR****Connector ... HR, steel**

**Application:** Connection fitting for metal hoses  
**Connection 1:** BSP external thread, cylindrical  
**Sealing form 1:** flat sealing  
**Standard:** ISO 228-1  
**Short code:** AGR-Flat  
**Construction:** straight  
**Material:** Steel

**Note:** Welded variant in stainless steel only Width across flats values are listed for reference purposes!


**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G1	AF mm
WA 006 HR	6	350	G 1/4"	19
WA 010 HR	10	350	G 3/8"	22
WA 013 HR	13	315	G 1/2"	27
WA 016 HR	16	315	G 5/8"	30
WA 020 HR	20	250	G 3/4"	32
WA 025 HR	25	200	G 1"	41
WA 032 HR	32	160	G 1 1/4"	50
WA 040 HR	40	125	G 1 1/2"	55
WA 050 HR	50	80	G 2"	70

**Web:** <http://cat.hansa-flex.com/en/WAHR>

**Product versions:**

**WA HR VA** - Connector ... HR, VA, Stainless steel

**WA HR VA****Connector ... HR, VA**

**Application:** Connection fitting for metal hoses  
**Connection 1:** BSP external thread, cylindrical  
**Sealing form 1:** flat sealing  
**Standard:** ISO 228-1  
**Short code:** AGR-Flat  
**Construction:** straight  
**Material:** Stainless steel

**Note:** Width across flats values are listed for reference purposes!

**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G1	AF mm
WA 006 HR VA	6	350	G 1/4"	19
WA 010 HR VA	10	350	G 3/8"	22
WA 013 HR VA	13	315	G 1/2"	27
WA 016 HR VA	16	315	G 5/8"	30
WA 020 HR VA	20	250	G 3/4"	32
WA 025 HR VA	25	200	G 1"	41
WA 032 HR VA	32	160	G 1 1/4"	50
WA 040 HR VA	40	125	G 1 1/2"	55
WA 050 HR VA	50	80	G 2"	70
WA 065 HR VA	65	40	G 2.1/2"	85
WA 080 HR VA	80	40	G 3"	95

**Web:** <http://cat.hansa-flex.com/en/WAHRVA>


**Product versions:**

**WA HR** - Connector ... HR, steel, Steel

## WA IR

## Connector ... IR, malleable cast iron

<b>Application:</b>	Connection fitting for metal hoses
<b>Connection 1:</b>	Threaded bushing with cylindrical, imperial internal thread
<b>Standard:</b>	DIN EN 10226 / ISO 7-1
<b>Construction:</b>	straight
<b>Material:</b>	Malleable cast iron
<b>Application:</b>	soldered variant temperature resistant up to 200 °C



**Note:** The specified working pressure PN(bar) relates to the working temperature of -20 °C to 120 °C. At working temperature of 120 °C to 200 °C the working pressure PN (bar) reduces to 22,7 bar.

**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G1
WA 004 IR	4	25	Rp 1/8"
WA 006 IR	6	25	Rp 1/4"
WA 010 IR	10	25	Rp 3/8"
WA 013 IR	13	25	Rp 1/2"
WA 020 IR	20	25	Rp 3/4"
WA 025 IR	25	25	Rp 1"
WA 032 IR	32	25	Rp 1.1/4"
WA 040 IR	40	25	Rp 1.1/2"
WA 050 IR	50	25	Rp 2"
WA 065 IR	65	25	Rp 2.1/2"
WA 080 IR	80	25	Rp 3"
WA 100 IR	100	25	Rp 4"

**Web:** <http://cat.hansa-flex.com/en/WAIR>

**Product versions:**

**WA IR RG** - Connector ... IR, red bronze, Red bronze


**WA IR ST** - Connector ... IR, steel, Steel (weldable)

**WA IR VA** - Connector ... IR, VA, Stainless steel

## WA IR VA

## Connector ... IR, VA

<b>Application:</b>	Connection fitting for metal hoses
<b>Connection 1:</b>	Threaded bushing with cylindrical, imperial internal thread
<b>Standard:</b>	DIN EN 10226 / ISO 7-1
<b>Construction:</b>	straight
<b>Material:</b>	Stainless steel



**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G1
WA 004 IR VA	4	10	Rp 1/8"
WA 006 IR VA	6	10	Rp 1/4"
WA 010 IR VA	10	10	Rp 3/8"
WA 013 IR VA	13	10	Rp 1/2"
WA 020 IR VA	20	10	Rp 3/4"
WA 025 IR VA	25	10	Rp 1"
WA 032 IR VA	32	10	Rp 1.1/4"
WA 040 IR VA	40	10	Rp 1.1/2"
WA 050 IR VA	50	10	Rp 2"
WA 065 IR VA	65	10	Rp 2.1/2"
WA 080 IR VA	80	10	Rp 3"
WA 100 IRVA	100	10	Rp 4"


**Web:** <http://cat.hansa-flex.com/en/WAIRVA>

**Product versions:**

**WA IR** - Connector ... IR, malleable cast iron, Malleable cast iron

**WA IR RG** - Connector ... IR, red bronze, Red bronze

**WA IR ST** - Connector ... IR, steel, Steel (weldable)

**WA IR ST****Connector ... IR, steel**

**Application:** Connection fitting for metal hoses  
**Connection 1:** Threaded bushing with cylindrical, imperial internal thread  
**Standard:** DIN EN 10226 / ISO 7-1  
**Construction:** straight  
**Material:** Steel (weldable)

**Ordering information:** Other designs available on request

Identification	DN	G1
WA 006 IR ST	6	Rp 1/4"
WA 010 IR ST	10	Rp 3/8"
WA 013 IR ST	13	Rp 1/2"
WA 020 IR ST	20	Rp 3/4"
WA 025 IR ST	25	Rp 1"
WA 032 IR ST	32	Rp 1.1/4"
WA 040 IR ST	40	Rp 1.1/2"
WA 050 IR ST	50	Rp 2"
WA 065 IR ST	65	Rp 2.1/2"
WA 080 IR ST	80	Rp 3"


**Web:** <http://cat.hansa-flex.com/en/WAIRST>

**Product versions:**

**WA IR** - Connector ... IR, malleable cast iron, Malleable cast iron

**WA IR RG** - Connector ... IR, red bronze, Red bronze

**WA IR VA** - Connector ... IR, VA, Stainless steel

**WA IR RG****Connector ... IR, red bronze**

**Application:** Connection fitting for metal hoses  
**Connection 1:** Threaded bushing with cylindrical, imperial internal thread  
**Standard:** DIN EN 10226 / ISO 7-1  
**Construction:** straight  
**Material:** Red bronze  
**Application:** soldered variant temperature resistant up to 200 °C

**Ordering information:** Other designs available on request

Identification	DN	G1
WA 013 IR RG	13	Rp 1/2"
WA 020 IR RG	20	Rp 3/4"
WA 025 IR RG	25	Rp 1"
WA 032 IR RG	32	Rp 1.1/4"
WA 040 IR RG	40	Rp 1.1/2"
WA 050 IR RG	50	Rp 2"

**Web:** <http://cat.hansa-flex.com/en/WAIRRG>

**Product versions:**

**WA IR** - Connector ... IR, malleable cast iron, Malleable cast iron


**WA IR ST** - Connector ... IR, steel, Steel (weldable)

**WA IR VA** - Connector ... IR, VA, Stainless steel

## WA HN

## Connector ... HN, malleable cast iron

**Application:** Connection fitting for metal hoses  
**Connection 1:** imperial outer thread, conical  
**Sealing form 1:** thread seal  
**Standard:** DIN EN 10226 / ISO 7-1  
**Construction:** straight  
**Material:** Malleable cast iron  
**Application:** soldered variant temperature resistant up to 200 °C



**Note:** Width across flats values are listed for reference purposes! The specified working pressure PN(bar) relates to the working temperature of -20 °C to 120 °C. At working temperature of 120 °C to 200 °C the working pressure PN (bar) reduces to 22,7 bar.

**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G1	AF mm
WA 006 HN	6	25	R 1/4"	19
WA 010 HN	10	25	R 3/8"	22
WA 013 HN	13	25	R 1/2"	28
WA 020 HN	20	25	R 3/4"	32
WA 025 HN	25	25	R 1"	42
WA 032 HN	32	25	R 1.1/4"	50
WA 040 HN	40	25	R 1.1/2"	55
WA 050 HN	50	25	R 2"	70
WA 065 HN	65	25	R 2.1/2"	85
WA 080 HN	80	25	R 3"	100
WA 100 HN	100	25	R 4"	130

**Web:** <http://cat.hansa-flex.com/en/WAHN>


**Product versions:**

**WA HN VA** - Connector ... HN, VA, Stainless steel

## WA HN VA

## Connector ... HN, VA

**Application:** Connection fitting for metal hoses  
**Connection 1:** imperial outer thread, conical  
**Sealing form 1:** thread seal  
**Standard:** DIN EN 10226 / ISO 7-1  
**Construction:** straight  
**Material:** Stainless steel



**Note:** Width across flats values are listed for reference purposes!


**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G1	AF mm
WA 006 HN VA	6	50	R 1/4"	19
WA 010 HN VA	10	50	R 3/8"	22
WA 013 HN VA	13	50	R 1/2"	28
WA 020 HN VA	20	50	R 3/4"	32
WA 025 HN VA	25	50	R 1"	42
WA 032 HN VA	32	40	R 1.1/4"	50
WA 040 HN VA	40	40	R 1.1/2"	55
WA 050 HN VA	50	25	R 2"	70
WA 065 HN VA	65	25	R 2.1/2"	85
WA 080 HN VA	80	25	R 3"	100
WA 100 HN VA	100	25	R 4"	130

**Web:** <http://cat.hansa-flex.com/en/WAHNVA>

**Product versions:**

**WA HN** - Connector ... HN, malleable cast iron, Malleable cast iron

**WA AJ****Connector ... AJ, steel**

**Application:** Connection fitting for metal hoses  
**Connection 1:** UN/UNF nut threads  
**Sealing form 1:** 74° inner cone  
**Standard:** SAE J514  
**Short code:** DKJ  
**Construction:** straight  
**Material:** Steel

**Note:** Welded variant in stainless steel only Width across flats values are listed for reference purposes!


**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G1	S1 mm
WA 006 AJ	6	275	7/16"-20 UNF	14,0
WA 008 AJ	8	275	1/2"-20 UNF	17,0
WA 010 AJ	10	275	9/16"-18 UNF	19,0
WA 013 AJ	13	275	3/4"-16 UNF	24,0
WA 016 AJ	16	210	7/8"-14 UNF	27,0
WA 020 AJ	20	210	1.11/16"-12 UN	32,0
WA 025 AJ	25	170	1.5/16"-12 UN	41,0
WA 032 AJ	32	140	1.5/8"-12 UN	50,0
WA 040 AJ	40	105	1.7/8"-12 UN	60,0
WA 050 AJ	50	80	2.1/2"-12 UN	75,0

**Web:** <http://cat.hansa-flex.com/en/WAAJ>

**Product versions:**

**WA AJ VA** - Connector ... AJ, VA, Stainless steel

**WA AJ VA****Connector ... AJ, VA**

**Application:** Connection fitting for metal hoses  
**Connection 1:** UN/UNF nut threads  
**Sealing form 1:** 74° inner cone  
**Standard:** SAE J514  
**Short code:** DKJ  
**Construction:** straight  
**Material:** Stainless steel

**Note:** Width across flats values are listed for reference purposes!

**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G1	S1 mm
WA 006 AJ VA	6	275	7/16"-20 UNF	14,0
WA 008 AJ VA	8	275	1/2"-20 UNF	17,0
WA 010 AJ VA	10	275	9/16"-18 UNF	19,0
WA 013 AJ VA	13	275	3/4"-16 UNF	24,0
WA 016 AJ VA	16	210	7/8"-14 UNF	27,0
WA 020 AJ VA	20	210	1.11/16"-12 UN	32,0
WA 025 AJ VA	25	170	1.5/16"-12 UN	41,0
WA 032 AJ VA	32	140	1.5/8"-12 UN	50,0
WA 040 AJ VA	40	105	1.7/8"-12 UN	60,0
WA 050 AJ VA	50	80	2.1/2"-12 UN	75,0

**Web:** <http://cat.hansa-flex.com/en/WAAJVA>

**Product versions:**


**WA AJ** - Connector ... AJ, steel, Steel



## WA HJ

## Connector ... HJ, steel

**Application:** Connection fitting for metal hoses  
**Connection 1:** UN/UNF external threads  
**Sealing form 1:** 74° outer cone  
**Standard:** SAE J514  
**Short code:** AGJ  
**Construction:** straight  
**Material:** Steel



**Note:** Welded variant in stainless steel only Width across flats values are listed for reference purposes!

**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G1	AF mm
WA 006 HJ	6	345	7/16"-20 UNF	14
WA 008 HJ	8	345	1/2"-20 UNF	14
WA 010 HJ	10	345	9/16"-18 UNF	19
WA 013 HJ	13	310	3/4"-16 UNF	22
WA 016 HJ	16	240	7/8"-14 UNF	24
WA 020 HJ	20	240	1.1/16" -12 UN	27
WA 025 HJ	25	210	1.5/16" -12 UN	36
WA 032 HJ	32	170	1.5/8" -12 UN	46
WA 040 HJ	40	140	1.7/8" -12 UN	50
WA 050 HJ	50	115	2.1/2" -12 UN	65

**Web:** <http://cat.hansa-flex.com/en/WAHJ>


**Product versions:**

**WA HJ VA** - Connector ... HJ, VA, Stainless steel

## WA HJ VA

## Connector ... HJ, VA

**Application:** Connection fitting for metal hoses  
**Connection 1:** UN/UNF external threads  
**Sealing form 1:** 74° outer cone  
**Standard:** SAE J514  
**Short code:** AGJ  
**Construction:** straight  
**Material:** Stainless steel



**Note:** Width across flats values are listed for reference purposes!


**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G1	AF mm
WA 006 HJ VA	6	345	7/16"-20 UNF	14
WA 008 HJ VA	8	345	1/2"-20 UNF	14
WA 010 HJ VA	10	345	9/16"-18 UNF	19
WA 013 HJ VA	13	310	3/4"-16 UNF	22
WA 016 HJ VA	16	240	7/8"-14 UNF	24
WA 020 HJ VA	20	240	1.1/16" -12 UN	27
WA 025 HJ VA	25	210	1.5/16" -12 UN	36
WA 032 HJ VA	32	170	1.5/8" -12 UN	46
WA 040 HJ VA	40	140	1.7/8" -12 UN	50
WA 050 HJ VA	50	115	2.1/2" -12 UN	65

**Web:** <http://cat.hansa-flex.com/en/WAHJVA>

**Product versions:**

**WA HJ** - Connector ... HJ, steel, Steel

**WA FL****Connector ... FL, steel**

<b>Application:</b>	Connection fitting for metal hoses
<b>Connection 1:</b>	Pipe sockets
<b>Sealing form 1:</b>	Cutting ring connection
<b>Standard:</b>	ISO 8434-1, DIN 3861
<b>Short code:</b>	BEL
<b>Construction:</b>	straight
<b>Series:</b>	light
<b>Material:</b>	Steel (weldable)

**Note:** Final cutting ring assembly must be carried out in the hardened pre-assembly socket (VOM...). As an alternative we recommend connector shape AFL or AOL.

**Ordering information:** Other designs available on request


Identification	DN	PN (bar)	Series	D1 mm	s mm	L1 mm
WA 004 FL	4	250	6 L	6	1,0	25
WA 006 FL	6	250	8 L	8	1,0	30
WA 008 FL	8	250	10 L	10	1,0	30
WA 010 FL	10	219	12 L	12	1,0	30
WA 013 FL	13	250	15 L	15	1,5	32
WA 016 FL	16	160	18 L	18	1,5	32
WA 020 FL	20	160	22 L	22	1,5	36
WA 025 FL	25	100	28 L	28	2,0	40
WA 032 FL	32	100	35 L	35	2,0	45
WA 040 FL	40	100	42 L	42	2,0	45

**Web:** <http://cat.hansa-flex.com/en/WAFL>

**Product versions:**

**WA FL CU** - Connector ... FL, copper, Copper

**WA FL VA** - Connector ... FL, VA, Stainless steel 1.4571

**WA FL VA****Connector ... FL, VA**

<b>Application:</b>	Connection fitting for metal hoses
<b>Connection 1:</b>	Pipe sockets
<b>Sealing form 1:</b>	Cutting ring connection
<b>Standard:</b>	ISO 8434-1
<b>Short code:</b>	BEL
<b>Construction:</b>	straight
<b>Series:</b>	light
<b>Material:</b>	Stainless steel 1.4571

**Note:** Final cutting ring assembly must be carried out in the hardened pre-assembly socket (VOM...). As an alternative we recommend connector shape AFL or AOL.

**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	Series	D1 mm	s mm	L1 mm
WA 004 FL VA	4	250	6 L	6	1,0	25
WA 006 FL VA	6	250	8 L	8	1,0	30
WA 008 FL VA	8	240	10 L	10	1,0	30
WA 010 FL VA	10	200	12 L	12	1,0	30
WA 013 FL VA	13	250	15 L	15	1,5	32
WA 016 FL VA	16	160	18 L	18	1,5	32
WA 020 FL VA	20	160	22 L	22	1,5	36
WA 025 FL VA	25	100	28 L	28	2,0	40
WA 032 FL VA	32	100	35 L	35	2,0	45
WA 040 FL VA	40	100	42 L	42	2,0	45

**Web:** <http://cat.hansa-flex.com/en/WAFLVA>

**Product versions:**


**WA FL** - Connector ... FL, steel, Steel (weldable)

**WA FL CU** - Connector ... FL, copper, Copper

## WA FL CU

## Connector ... FL, copper

**Application:** Connection fitting for metal hoses  
**Connection 1:** Pipe sockets  
**Sealing form 1:** Cutting ring connection  
**Standard:** ISO 8434-1, DIN 3861  
**Short code:** BEL  
**Construction:** straight  
**Series:** light  
**Material:** Copper



**Note:** Final cutting ring assembly must be carried out in the hardened pre-assembly socket (VOM...). As an alternative we recommend connector shape AFL or AOL.

**Ordering information:** Other designs available on request

Identification	DN	Series	D1 mm	s mm	L1 mm
WA 008 FL CU	8	10 L	10	1,0	30
WA 010 FL CU	10	12 L	12	1,0	30
WA 013 FL CU	13	15 L	15	1,5	32
WA 016 FL CU	16	18 L	18	1,5	32
WA 020 FL CU	20	22 L	22	1,5	36
WA 025 FL CU	25	28 L	28	2,0	40
WA 032 FL CU	32	35 L	35	2,0	45

**Web:** <http://cat.hansa-flex.com/en/WAFLCU>

**Product versions:**


**WA FL** - Connector ... FL, steel, Steel (weldable)

**WA FL VA** - Connector ... FL, VA, Stainless steel 1.4571

## WA FS

## Connector ... FS, steel

**Application:** Connection fitting for metal hoses  
**Connection 1:** Pipe sockets  
**Sealing form 1:** Cutting ring connection  
**Standard:** ISO 8434-1, DIN 3861  
**Short code:** BES  
**Construction:** straight  
**Series:** heavy  
**Material:** Steel (weldable)



**Note:** Final cutting ring assembly must be carried out in the hardened pre-assembly socket (VOM...). As an alternative we recommend connector shape AFS or AOS.


**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	Series	D1 mm	s mm	L1 mm
WA 004 FS	4	320	8 S	8	1,0	30
WA 006 FS	6	263	10 S	10	1,0	30
WA 008 FS	8	219	12 S	12	1,0	30
WA 010 FS	10	299	14 S	14	1,5	35
WA 013 FS	13	262	16 S	16	1,5	35
WA 016 FS	16	288	20 S	20	2,0	40
WA 020 FS	20	230	25 S	25	2,0	45
WA 025 FS	25	244	30 S	30	2,5	50
WA 032 FS	32	222	38 S	38	3,0	55

**Web:** <http://cat.hansa-flex.com/en/WAFS>

**Product versions:**

**WA FS VA** - Connector ... FS, VA, Stainless steel 1.4571

**WA FS VA****Connector ... FS, VA**

<b>Application:</b>	Connection fitting for metal hoses
<b>Connection 1:</b>	Pipe sockets
<b>Sealing form 1:</b>	Cutting ring connection
<b>Standard:</b>	ISO 8434-1, DIN 3861
<b>Short code:</b>	BES
<b>Construction:</b>	straight
<b>Series:</b>	heavy
<b>Material:</b>	Stainless steel 1.4571

**Note:** Final cutting ring assembly must be carried out in the hardened pre-assembly socket (VOM...). As an alternative we recommend connector shape AFS or AOS.


**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	Series	D1 mm	s mm	L1 mm
WA 004 FS VA	4	300	8S	8	1,0	30
WA 006 FS VA	6	240	10 S	10	1,0	30
WA 008 FS VA	8	200	12 S	12	1,0	30
WA 010 FS VA	10	283	14 S	14	1,5	35
WA 013 FS VA	13	261	16 S	16	1,5	35
WA 016 FS VA	16	287	20 S	20	2,0	40
WA 020 FS VA	20	229	25 S	25	2,0	45
WA 025 FS VA	25	243	30 S	30	2,5	50
WA 032 FS VA	32	221	38 S	38	3,0	55

**Web:** <http://cat.hansa-flex.com/en/WAFSVA>

**Product versions:**

**WA FS** - Connector ... FS, steel, Steel (weldable)

**WA FA****Connector ... FA, steel**

<b>Application:</b>	Connection fitting for metal hoses
<b>Connection 1:</b>	Pipe socket, imperial with welded ends
<b>Sealing form 1:</b>	Welded connection
<b>Standard:</b>	DIN EN 10216-1
<b>Construction:</b>	straight
<b>Material:</b>	Steel P235TR2 (1.0255)

**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	D1 mm	s mm	L1 mm
WA 013 FA	13	320	21,3	2,0	50
WA 020 FA	20	290	26,9	2,3	55
WA 025 FA	25	260	33,7	2,6	55
WA 032 FA	32	200	42,4	2,6	60
WA 040 FA	40	175	48,3	2,6	60
WA 050 FA	50	155	60,3	2,9	65
WA 065 FA	65	120	76,1	2,9	70
WA 080 FA	80	115	88,9	3,2	75
WA 100 FA	100	100	114,3	3,6	75
WA 125 FA	125	90	139,7	4,0	80
WA 150 FA	150	85	168,3	4,5	80

**Web:** <http://cat.hansa-flex.com/en/WAFA>


**Product versions:**

**WA FA VA** - Connector ... FA, VA, Stainless steel 1.4571

## WA FA VA

## Connector ... FA, VA

**Application:** Connection fitting for metal hoses  
**Connection 1:** Pipe socket, imperial with welded ends  
**Sealing form 1:** Welded connection  
**Standard:** DIN EN 10216-5  
**Construction:** straight  
**Material:** Stainless steel 1.4571



**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	D1 mm	s mm	L1 mm
WA 013 FA VA	13	260	21,3	2,0	50
WA 016 FA VA	16	260	21,3	2,0	50
WA 020 FA VA	20	235	26,9	2,3	55
WA 025 FA VA	25	210	33,7	2,6	55
WA 032 FA VA	32	165	42,4	2,6	60
WA 040 FA VA	40	140	48,3	2,6	60
WA 050 FA VA	50	125	60,3	2,9	65
WA 065 FA VA	65	100	76,1	2,9	70
WA 080 FA VA	80	90	88,9	3,2	75
WA 100 FA VA	100	80	114,3	3,6	75
WA 125 FA VA	125	70	139,7	4,0	80
WA 150 FA VA	150	65	168,3	4,5	80

**Web:** <http://cat.hansa-flex.com/en/WAFAVA>


**Product versions:**

WA FA - Connector ... FA, steel, Steel P235TR2 (1.0255)

## WA AFL-GAR

## Connector ... AFL-GAR, steel

**Application:** Connection fitting for metal hoses  
**Connection 1:** imperial internal thread, cylindrical  
**Sealing form 1:** conical seat  
**Standard:** DIN EN 10226 / ISO 7-1  
**Construction:** straight  
**Design:** 3-part threaded connection  
**Material:** Steel



**Note:** Width across flats values are listed for reference purposes!


**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G2	AF mm	S1 mm
WA 006 AFL-GAR	6	250	G 1/4" -19	19	17,0
WA 008 AFL-GAR	8	250	G 1/4" -19	19	19,0
WA 010 AFL-GAR	10	250	G 3/8" -19	22	22,0
WA 013 AFL-GAR	13	250	G 1/2" -14	27	27,0
WA 016 AFL-GAR	16	160	G 1/2" -14	27	32,0
WA 020 AFL-GAR	20	160	G 3/4" -14	32	36,0
WA 025 AFL-GAR	25	100	G 1" -11	41	41,0
WA 032 AFL-GAR	32	100	G 1.1/4" -11	50	50,0
WA 040 AFL-GAR	40	100	G 1.1/2" -11	55	60,0

**Web:** <http://cat.hansa-flex.com/en/WAFLGAR>

**Product versions:**

WA AFL-GAR VA - Connector ... AFL-GAR, VA, Stainless steel

**WA AFL-GAR VA****Connector ... AFL-GAR, VA**

<b>Application:</b>	Connection fitting for metal hoses
<b>Connection 1:</b>	imperial internal thread, cylindrical
<b>Sealing form 1:</b>	conical seat
<b>Standard:</b>	DIN EN 10226 / ISO 7-1
<b>Construction:</b>	straight
<b>Design:</b>	3-part threaded connection
<b>Material:</b>	Stainless steel

**Note:** Width across flats values are listed for reference purposes!


**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G2	AF mm	S1 mm
WA 006 AFL-GAR VA	6	250	G 1/4" -19	19	17,0
WA 008 AFL-GAR VA	8	250	G 1/4" -19	19	19,0
WA 010 AFL-GAR VA	10	250	G 3/8" -19	22	22,0
WA 013 AFL-GAR VA	13	250	G 1/2" -14	27	27,0
WA 016 AFL-GAR VA	16	160	G 1/2" -14	27	32,0
WA 020 AFL-GAR VA	20	160	G 3/4" -14	32	36,0
WA 025 AFL-GAR VA	25	100	G 1" -11	41	41,0
WA 032 AFL-GAR VA	32	100	G 1.1/4" -11	50	50,0
WA 040 AFL-GAR VA	40	100	G 1.1/2" -11	55	60,0

**Web:** <http://cat.hansa-flex.com/en/WAFLGARVA>

**Product versions:**

**WA AFL-GAR** - Connector ... AFL-GAR, steel, Steel

**WA VB****Connector ... VB, malleable cast iron**

<b>Application:</b>	Connection fitting for metal hoses
<b>Connection 1:</b>	imperial internal thread, cylindrical
<b>Sealing form 1:</b>	conical seat
<b>Standard:</b>	DIN EN 10226 / ISO 7-1
<b>Construction:</b>	straight
<b>Application:</b>	soldered variant temperature resistant up to 200 °C
<b>Design:</b>	3-part threaded connection
<b>Material:</b>	Malleable cast iron

**Note:** Width across flats values are listed for reference purposes! The specified working pressure PN(bar) relates to the working temperature of -20 °C to 120 °C. At working temperature of 120 °C to 200 °C the working pressure PN (bar) reduces to 22,7 bar.

**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G1	S1 mm
WA 006 VB	6	25	Rp 1/4"	28,0
WA 010 VB	10	25	Rp 3/8"	32,0
WA 013 VB	13	25	Rp 1/2"	39,0
WA 020 VB	20	25	Rp 3/4"	48,0
WA 025 VB	25	25	Rp 1"	55,0
WA 032 VB	32	25	Rp 1.1/4"	67,0
WA 040 VB	40	25	Rp 1.1/2"	74,0
WA 050 VB	50	25	Rp 2"	90,0
WA 065 VB	65	25	Rp 2.1/2"	111,0
WA 080 VB	80	25	Rp 3"	130,0
WA 100 VB	100	25	Rp 4"	151,0

**Web:** <http://cat.hansa-flex.com/en/WAVB>

**Product versions:**


**WA VB RG** - Connector ... VB, red bronze, Red bronze

**WA VB VA** - Connector ... VB, VA, Stainless steel

## WA VB VA

## Connector ... VB, VA

**Application:** Connection fitting for metal hoses  
**Connection 1:** imperial internal thread, cylindrical  
**Sealing form 1:** conical seat  
**Standard:** DIN EN 10226 / ISO 7-1  
**Construction:** straight  
**Design:** 3-part threaded connection  
**Material:** Stainless steel



**Note:** Width across flats values are listed for reference purposes!

**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G1	S1 mm
WA 004 VB VA	4	50	Rp 1/8"	27,0
WA 006 VB VA	6	50	Rp 1/4"	27,0
WA 010 VB VA	10	50	Rp 3/8"	32,0
WA 013 VB VA	13	50	Rp 1/2"	41,0
WA 020 VB VA	20	50	Rp 3/4"	50,0
WA 025 VB VA	25	50	Rp 1"	55,0
WA 032 VB VA	32	40	Rp 1.1/4"	70,0
WA 040 VB VA	40	40	Rp 1.1/2"	75,0
WA 050 VB VA	50	40	Rp 2"	90,0
WA 065 VB VA	65	25	Rp 2.1/2"	110,0
WA 080 VB VA	80	25	Rp 3"	130,0
WA 100 VB VA	100	25	Rp 4"	130,0

**Web:** <http://cat.hansa-flex.com/en/WAVBVA>

**Product versions:**


**WA VB** - Connector ... VB, malleable cast iron, Malleable cast iron

**WA VB RG** - Connector ... VB, red bronze, Red bronze

## WA VB RG

## Connector ... VB, red bronze

**Application:** Connection fitting for metal hoses  
**Connection 1:** imperial internal thread, cylindrical  
**Sealing form 1:** conical seat  
**Standard:** DIN EN 10226 / ISO 7-1  
**Construction:** straight  
**Application:** soldered variant temperature resistant up to 200 °C  
**Design:** 3-part threaded connection  
**Material:** Red bronze



**Note:** Width across flats values are listed for reference purposes!

**Ordering information:** Other designs available on request


Identification	DN	G1	S1 mm
WA 010 VB RG	10	Rp 3/8"	32,0
WA 013 VB RG	13	Rp 1/2"	41,0
WA 020 VB RG	20	Rp 3/4"	50,0
WA 025 VB RG	25	Rp 1"	55,0
WA 032 VB RG	32	Rp 1.1/4"	70,0
WA 040 VB RG	40	Rp 1.1/2"	75,0
WA 050 VB RG	50	Rp 2"	90,0

**Web:** <http://cat.hansa-flex.com/en/WAVBRG>

**Product versions:**

**WA VB** - Connector ... VB, malleable cast iron, Malleable cast iron

**WA VB VA** - Connector ... VB, VA, Stainless steel

**WA VBF****Connector ... VBF, malleable cast iron**

<b>Application:</b>	Connection fitting for metal hoses
<b>Connection 1:</b>	imperial internal thread, cylindrical
<b>Sealing form 1:</b>	flat sealing
<b>Standard:</b>	DIN EN 10226 / ISO 7-1
<b>Construction:</b>	straight
<b>Application:</b>	soldered variant temperature resistant up to 200 °C
<b>Material:</b>	Malleable cast iron

**Note:** Width across flats values are listed for reference purposes! The specified working pressure PN(bar) relates to the working temperature of -20 °C to 120 °C. At working temperature of 120 °C to 200 °C the working pressure PN (bar) reduces to 22,7 bar.

**Ordering information:** Other designs available on request


Identification	DN	PN (bar)	G1	S1 mm
WA 006 VBF	6	25	Rp 1/4"	28,0
WA 010 VBF	10	25	Rp 3/8"	32,0
WA 013 VBF	13	25	Rp 1/2"	39,0
WA 020 VBF	20	25	Rp 3/4"	48,0
WA 025 VBF	25	25	Rp 1"	55,0
WA 032 VBF	32	25	Rp 1.1/4"	67,0
WA 040 VBF	40	25	Rp 1.1/2"	74,0
WA 050 VBF	50	25	Rp 2"	90,0
WA 065 VBF	65	25	Rp 2.1/2"	111,0
WA 080 VBF	80	25	Rp 3"	130,0

**Web:** <http://cat.hansa-flex.com/en/WAVBF>

**Product versions:**

**WA VBF RG** - Connector ... VBF, red bronze, Red bronze

**WA VBF VA** - Connector ... VBF, VA, Stainless steel

**WA VBF VA****Connector ... VBF, VA**

<b>Application:</b>	Connection fitting for metal hoses
<b>Connection 1:</b>	imperial internal thread, cylindrical
<b>Sealing form 1:</b>	flat sealing
<b>Standard:</b>	DIN EN 10226 / ISO 7-1
<b>Construction:</b>	straight
<b>Design:</b>	3-part threaded connection
<b>Material:</b>	Stainless steel

**Note:** Width across flats values are listed for reference purposes!

**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G1	S1 mm
WA 004 VBF VA	4	25	Rp 1/8"	27,0
WA 006 VBFVA	6	25	Rp 1/4"	27,0
WA 010 VBF VA	10	25	Rp 3/8"	32,0
WA 013 VBF VA	13	25	Rp 1/2"	41,0
WA 020 VBF VA	20	25	Rp 3/4"	50,0
WA 025 VBF VA	25	25	Rp 1"	55,0
WA 032 VBF VA	32	16	Rp 1.1/4"	70,0
WA 040 VBF VA	40	16	Rp 1.1/2"	75,0
WA 050 VBF VA	50	16	Rp 2"	90,0
WA 065 VBF VA	65	10	Rp 2.1/2"	110,0

**Web:** <http://cat.hansa-flex.com/en/WAVBFVA>

**Product versions:**

**WA VBF** - Connector ... VBF, malleable cast iron, Malleable cast iron


**WA VBF RG** - Connector ... VBF, red bronze, Red bronze



## WA VBF RG

## Connector ... VBF, red bronze

**Application:** Connection fitting for metal hoses  
**Connection 1:** imperial internal thread, cylindrical  
**Sealing form 1:** flat sealing  
**Standard:** DIN EN 10226 / ISO 7-1  
**Construction:** straight  
**Application:** soldered variant temperature resistant up to 200 °C  
**Design:** 3-part threaded connection  
**Material:** Red bronze



**Note:** Width across flats values are listed for reference purposes!

**Ordering information:** Other designs available on request

Identification	DN	G1	S1 mm
WA 013 VBF RG	13	Rp 1/2"	30,0
WA 020 VBF RG	20	Rp 3/4"	37,0
WA 025 VBF RG	25	Rp 1"	46,0

**Web:** <http://cat.hansa-flex.com/en/WAVBFRG>

**Product versions:**


**WA VBF** - Connector ... VBF, malleable cast iron, Malleable cast iron

**WA VBF VA** - Connector ... VBF, VA, Stainless steel

## WA AFL-VRK

## Connector ... AFL-VRK, steel

**Application:** Connection fitting for metal hoses  
**Connection 1:** imperial outer thread, conical  
**Sealing form 1:** conical seat  
**Standard:** DIN EN 10226 / ISO 7-1  
**Construction:** straight  
**Design:** 3-part threaded connection  
**Material:** Steel



**Note:** Width across flats values are listed for reference purposes!


**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G2	AF mm	S1 mm
WA 006 AFL-VRK	6	250	R 1/4"	17	17,0
WA 008 AFL-VRK	8	250	R 1/4"	17	19,0
WA 010 AFL-VRK	10	250	R 3/8"	24	22,0
WA 013 AFL-VRK	13	250	R 1/2"	27	27,0
WA 016 AFL-VRK	16	160	R 1/2"	27	32,0
WA 020 AFL-VRK	20	160	R 3/4"	36	36,0
WA 025 AFL-VRK	25	100	R 1"	41	41,0
WA 032 AFL-VRK	32	100	R 1.1/4"	50	50,0
WA 040 AFL-VRK	40	100	R 1.1/2"	60	60,0

**Web:** <http://cat.hansa-flex.com/en/WAFLVRK>

**Product versions:**

**WA AFL-VRK VA** - Connector ... AFL-VRK, VA, Stainless steel

**WA AFL-VRK VA****Connector ... AFL-VRK, VA**

**Application:** Connection fitting for metal hoses  
**Connection 1:** imperial outer thread, conical  
**Sealing form 1:** conical seat  
**Standard:** DIN EN 10226 / ISO 7-1  
**Construction:** straight  
**Design:** 3-part threaded connection  
**Material:** Stainless steel

**Note:** Width across flats values are listed for reference purposes!


**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G2	AF mm	S1 mm
WA 006 AFL-VRK VA	6	250	R 1/4"	17	17,0
WA 008 AFL-VRK VA	8	250	R 1/4"	17	19,0
WA 010 AFL-VRK VA	10	250	R 3/8"	24	22,0
WA 013 AFL-VRK VA	13	250	R 1/2"	27	27,0
WA 016 AFL-VRK VA	16	160	R 1/2"	27	32,0
WA 020 AFL-VRK VA	20	160	R 3/4"	36	36,0
WA 025 AFL-VRK VA	25	100	R 1"	41	41,0
WA 032 AFL-VRK VA	32	100	R 1.1/4"	50	50,0
WA 040 AFL-VRK VA	40	100	R 1.1/2"	60	60,0

**Web:** <http://cat.hansa-flex.com/en/WAFLVRKVA>

**Product versions:**

**WA AFL-VRK - Connector ... AFL-VRK, steel, Steel**

**WA AFL-VR****Connector ... AFL-VR, steel**

**Application:** Connection fitting for metal hoses  
**Connection 1:** BSP external thread, cylindrical  
**Sealing form 1:** conical seat  
**Standard:** ISO 228-1  
**Construction:** straight  
**Design:** 3-part threaded connection  
**Material:** Steel

**Note:** Width across flats values are listed for reference purposes!

**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G2	AF mm	S1 mm
WA 006 AFL-VR	6	250	G 1/4" -19	19	17,0
WA 008 AFL-VR	8	250	G 1/4" -19	19	19,0
WA 010 AFL-VR	10	250	G 3/8" -19	22	22,0
WA 013 AFL-VR	13	250	G 1/2" -14	27	27,0
WA 016 AFL-VR	16	160	G 1/2" -14	27	32,0
WA 020 AFL-VR	20	160	G 3/4" -14	32	36,0
WA 025 AFL-VR	25	100	G 1" -11	41	41,0
WA 032 AFL-VR	32	100	G 1.1/4" -11	50	50,0
WA 040 AFL-VR	40	100	G 1.1/2" -11	55	60,0

**Web:** <http://cat.hansa-flex.com/en/WAFLVR>


**Product versions:**

**WA AFL-VR VA - Connector ... AFL-VR, VA, Stainless steel**

## WA AFL-VR VA

## Connector ... AFL-VR, VA

**Application:** Connection fitting for metal hoses  
**Connection 1:** BSP external thread, cylindrical  
**Sealing form 1:** conical seat  
**Standard:** ISO 228-1  
**Construction:** straight  
**Design:** 3-part threaded connection  
**Material:** Stainless steel



**Note:** Width across flats values are listed for reference purposes!

**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G2	AF mm	S1 mm
WA 006 AFL-VR VA	6	250	G 1/4" -19	19	17,0
WA 008 AFL-VR VA	8	250	G 1/4" -19	19	19,0
WA 010 AFL-VR VA	10	250	G 3/8" -19	22	22,0
WA 013 AFL-VR VA	13	250	G 1/2" -14	27	27,0
WA 016 AFL-VR VA	16	160	G 1/2" -14	27	32,0
WA 020 AFL-VR VA	20	160	G 3/4" -14	32	36,0
WA 025 AFL-VR VA	25	100	G 1" -11	41	41,0
WA 032 AFL-VR VA	32	100	G 1.1/4" -11	50	50,0
WA 040 AFL-VR VA	40	100	G 1.1/2" -11	55	60,0

**Web:** <http://cat.hansa-flex.com/en/WAAFLVRVA>


**Product versions:**

WA AFL-VR - Connector ... AFL-VR, steel, Steel

## WA VC

## Connector ... VC, malleable cast iron

**Application:** Connection fitting for metal hoses  
**Connection 1:** imperial outer thread, conical  
**Sealing form 1:** conical seat  
**Standard:** DIN EN 10226 / ISO 7-1  
**Application:** soldered variant temperature resistant up to 200 °C  
**Construction:** straight  
**Design:** 3-part threaded connection  
**Material:** Malleable cast iron



**Note:** Width across flats values are listed for reference purposes! The specified working pressure PN(bar) relates to the working temperature of -20 °C to 120 °C. At working temperature of 120 °C to 200 °C the working pressure PN (bar) reduces to 22,7 bar.

**Ordering information:** Other designs available on request


Identification	DN	PN (bar)	G1	S1 mm
WA 006 VC	6	25	R 1/4"	28,0
WA 010 VC	10	25	R 3/8"	32,0
WA 013 VC	13	25	R 1/2"	39,0
WA 020 VC	20	25	R 3/4"	48,0
WA 025 VC	25	25	R 1"	55,0
WA 032 VC	32	25	R 1.1/4"	67,0
WA 040 VC	40	25	R 1.1/2"	74,0
WA 050 VC	50	25	R 2"	90,0

**Web:** <http://cat.hansa-flex.com/en/WAVC>

**Product versions:**

WA VC RG - Connector ... VC, red bronze, Red bronze

WA VC VA - Connector ... VC, VA, Stainless steel

**WA VC VA****Connector ... VC, VA**

<b>Application:</b>	Connection fitting for metal hoses
<b>Connection 1:</b>	imperial outer thread, conical
<b>Sealing form 1:</b>	conical seat
<b>Standard:</b>	DIN EN 10226 / ISO 7-1
<b>Construction:</b>	straight
<b>Design:</b>	3-part threaded connection
<b>Material:</b>	Stainless steel

**Note:** Width across flats values are listed for reference purposes!

**Ordering information:** Other designs available on request


Identification	DN	PN (bar)	G1	S1 mm
WA 006 VC VA	6	50	R 1/4"	27,0
WA 010 VC VA	10	50	R 3/8"	32,0
WA 013 VC VA	13	50	R 1/2"	41,0
WA 020 VC VA	20	50	R 3/4"	50,0
WA 025 VC VA	25	50	R 1"	55,0
WA 032 VC VA	32	40	R 1.1/4"	70,0
WA 040 VC VA	40	40	R 1.1/2"	75,0
WA 050 VC VA	50	40	R 2"	90,0
WA 065 VC VA	65	25	R 2.1/2"	110,0
WA 080 VC VA	80	25	R 3"	130,0

**Web:** <http://cat.hansa-flex.com/en/WAVCVA>

**Product versions:**

**WA VC** - Connector ... VC, malleable cast iron, Malleable cast iron

**WA VC RG** - Connector ... VC, red bronze, Red bronze

**WA VC RG****Connector ... VC, red bronze**

<b>Application:</b>	Connection fitting for metal hoses
<b>Connection 1:</b>	imperial outer thread, conical
<b>Sealing form 1:</b>	conical seat
<b>Standard:</b>	DIN EN 10226 / ISO 7-1
<b>Application:</b>	soldered variant temperature resistant up to 200 °C
<b>Construction:</b>	straight
<b>Design:</b>	3-part threaded connection
<b>Material:</b>	Red bronze

**Note:** Width across flats values are listed for reference purposes!

**Ordering information:** Other designs available on request

Identification	DN	G1	S1 mm
WA 013 VC RG	13	R 1/2"	28,0
WA 020 VC RG	20	R 3/4"	32,0
WA 025 VC RG	25	R 1"	42,0
WA 032 VC RG	32	R 1.1/4"	50,0
WA 040 VC RG	40	R 1.1/2"	55,0
WA 050 VC RG	50	R 2"	70,0

**Web:** <http://cat.hansa-flex.com/en/WAVCRG>

**Product versions:**


**WA VC** - Connector ... VC, malleable cast iron, Malleable cast iron

**WA VC VA** - Connector ... VC, VA, Stainless steel

## WA VCF

## Connector ... VCF, malleable cast iron

<b>Application:</b>	Connection fitting for metal hoses
<b>Connection 1:</b>	imperial outer thread, conical
<b>Sealing form 1:</b>	flat sealing
<b>Standard:</b>	DIN EN 10226 / ISO 7-1
<b>Application:</b>	soldered variant temperature resistant up to 200 °C
<b>Construction:</b>	straight
<b>Design:</b>	3-part threaded connection
<b>Material:</b>	Malleable cast iron



**Note:** Width across flats values are listed for reference purposes! The specified working pressure PN(bar) relates to the working temperature of -20 °C to 120 °C. At working temperature of 120 °C to 200 °C the working pressure PN (bar) reduces to 22,7 bar.

**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G1	S1 mm
WA 006 VCF	6	25	R 1/4"	28,0
WA 013 VCF	13	25	R 1/2"	39,0
WA 020 VCF	20	25	R 3/4"	48,0
WA 025 VCF	25	25	R 1"	55,0
WA 032 VCF	32	25	R 1.1/4"	67,0
WA 040 VCF	40	25	R 1.1/2"	74,0
WA 050 VCF	50	25	R 2"	90,0

**Web:** <http://cat.hansa-flex.com/en/WAVCF>

**Product versions:**


**WA VCF RG** - Connector ... VCF, red bronze, Red bronze

**WA VCF VA** - Connector ... VCF, VA, Stainless steel

## WA VCF VA

## Connector ... VCF, VA

<b>Application:</b>	Connection fitting for metal hoses
<b>Connection 1:</b>	imperial outer thread, conical
<b>Sealing form 1:</b>	flat sealing
<b>Standard:</b>	DIN EN 10226 / ISO 7-1
<b>Construction:</b>	straight
<b>Design:</b>	3-part threaded connection
<b>Material:</b>	Stainless steel



**Note:** Width across flats values are listed for reference purposes!

**Ordering information:** Other designs available on request


Identification	DN	PN (bar)	G1	S1 mm
WA 006 VCFVA	6	25	R 1/4"	27,0
WA 010 VCFVA	10	25	R 3/8"	32,0
WA 013 VCF VA	13	25	R 1/2"	41,0
WA 020 VCF VA	20	25	R 3/4"	50,0
WA 025 VCF VA	25	25	R 1"	55,0
WA 032 VCF VA	32	16	R 1.1/4"	70,0
WA 040 VCF VA	40	16	R 1.1/2"	75,0
WA 050 VCF VA	50	16	R 2"	90,0
WA 065 VCF VA	65	10	R 2.1/2"	110,0

**Web:** <http://cat.hansa-flex.com/en/WAVCFVA>

**Product versions:**

**WA VCF** - Connector ... VCF, malleable cast iron, Malleable cast iron

**WA VCF RG** - Connector ... VCF, red bronze, Red bronze

**WA VCF RG****Connector ... VCF, red bronze**

<b>Application:</b>	Connection fitting for metal hoses
<b>Connection 1:</b>	imperial outer thread, conical
<b>Sealing form 1:</b>	flat sealing
<b>Standard:</b>	DIN EN 10226 / ISO 7-1
<b>Application:</b>	soldered variant temperature resistant up to 200 °C
<b>Construction:</b>	straight
<b>Design:</b>	3-part threaded connection
<b>Material:</b>	Red bronze

**Note:** Width across flats values are listed for reference purposes!

**Ordering information:** Other designs available on request


Identification	DN	G1	S1 mm
WA 013 VCF RG	13	R 1/2"	28,0
WA 020 VCF RG	20	R 3/4"	32,0
WA 025 VCF RG	25	R 1"	42,0

**Web:** <http://cat.hansa-flex.com/en/WAVCFRG>

**Product versions:**

**WA VCF** - Connector ... VCF, malleable cast iron, Malleable cast iron

**WA VCF VA** - Connector ... VCF, VA, Stainless steel

**WA AFL-SA****Connector ... AFL-SA, steel**

<b>Application:</b>	Connection fitting for metal hoses
<b>Connection 1:</b>	Welded on socket for metric pipe
<b>Sealing form 1:</b>	conical seat
<b>Construction:</b>	straight
<b>Design:</b>	3-part threaded connection
<b>Material:</b>	Steel (weldable)

**Note:** Width across flats values are listed for reference purposes!

**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G2 mm	AF mm	S1 mm
WA 006 AFL-SA	6	250	12	14	17,0
WA 008 AFL-SA	8	250	14	17	19,0
WA 010 AFL-SA	10	250	16	19	22,0
WA 013 AFL-SA	13	250	19	22	27,0
WA 016 AFL-SA	16	160	22	27	32,0
WA 020 AFL-SA	20	160	27	32	36,0
WA 025 AFL-SA	25	100	32	41	41,0
WA 032 AFL-SA	32	100	40	46	50,0
WA 040 AFL-SA	40	100	46	55	60,0

**Web:** <http://cat.hansa-flex.com/en/WAFLSA>


**Product versions:**

**WA AFL-SA VA** - Connector ... AFL-SA, VA, Stainless steel

## WA AFL-SA VA

## Connector ... AFL-SA, VA

**Application:** Connection fitting for metal hoses  
**Connection 1:** Welded on socket for metric pipe  
**Sealing form 1:** conical seat  
**Construction:** straight  
**Design:** 3-part threaded connection  
**Material:** Stainless steel



**Note:** Width across flats values are listed for reference purposes!

**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G2 mm	AF mm	S1 mm
WA 006 AFL-SA VA	6	250	12	14	17,0
WA 008 AFL-SA VA	8	250	14	17	19,0
WA 010 AFL-SA VA	10	250	16	19	22,0
WA 013 AFL-SA VA	13	250	19	22	27,0
WA 016 AFL-SA VA	16	160	22	27	32,0
WA 020 AFL-SA VA	20	160	27	32	36,0
WA 025 AFL-SA VA	25	100	32	41	41,0
WA 032 AFL-SA VA	32	100	40	46	50,0
WA 040 AFL-SA VA	40	100	46	55	60,0

**Web:** <http://cat.hansa-flex.com/en/WAFLSAVA>


**Product versions:**

WA AFL-SA - Connector ... AFL-SA, steel, Steel (weldable)

## WA LMH VA

## Connector ... LMH, VA

**Application:** Connection fitting for metal hoses  
**Connection 1:** Thread socket form SC with Rd external thread  
**Sealing form 1:** conical seat with O-ring  
**Standard:** DIN 11851, DIN 405-1  
**Construction:** straight  
**Material:** Stainless steel



**Note:** Connector type LMH VA is supplied without a sealing ring.


**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G1
WA 010 LMH VA	10	40	Rd 28 x 1/8"
WA 013 LMH VA	13	40	Rd 34 x 1/8"
WA 020 LMH VA	20	40	Rd 44 x 1/6"
WA 025 LMH VA	25	40	Rd 52 x 1/6"
WA 032 LMH VA	32	40	Rd 58 x 1/6"
WA 040 LMH VA	40	40	Rd 65 x 1/6"
WA 040 025 LMH VA	40	40	Rd 52 x 1/6"
WA 050 LMH VA	50	25	Rd 78 x 1/6"
WA 065 LMH VA	65	25	Rd 95 x 1/6"
WA 080 LMH VA	80	25	Rd 110 x 1/4"
WA 100 LMH VA	100	25	Rd 130 x 1/4"
WA 125 LMH VA	125	16	Rd 160 x 1/4"
WA 150 LMH VA	150	16	Rd 190 x 1/4"

**Web:** <http://cat.hansa-flex.com/en/WALMHVA>

## WA LMA VA

### Connector ... LMA, VA



**Application:** Connection fitting for metal hoses  
**Connection 1:** Conical coupling, form SD with NUT- union nut form F  
**Sealing form 1:** conical seat with O-ring  
**Standard:** DIN 11851, DIN 405-1  
**Construction:** straight  
**Material:** Stainless steel

**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	G1
WA 010 LMAVA	10	40	Rd 28 x 1/8"
WA 013 LMAVA	13	40	Rd 34 x 1/8"
WA 020 LMAVA	20	40	Rd 44 x 1/6"
WA 025 LMAVA	25	40	Rd 52 x 1/6"
WA 032 LMAVA	32	40	Rd 58 x 1/6"
WA 040 LMAVA	40	40	Rd 65 x 1/6"
WA 050 LMAVA	50	25	Rd 78 x 1/6"
WA 065 LMAVA	65	25	Rd 95 x 1/6"
WA 080 LMAVA	80	25	Rd 110 x 1/4"
WA 100 LMAVA	100	25	Rd 130 x 1/4"
WA 125 LMAVA	125	16	Rd 160 x 1/4"
WA 150 LMAVA	150	16	Rd 190 x 1/4"

**Web:** <http://cat.hansa-flex.com/en/WALMAVA>

## NMHAS GVA

### Slotted nut hook wrench with hinge, stainless steel



**Application:** For screwing nuts for food fittings  
**Standard:** DIN 1810-A  
**Material:** Stainless steel 1.4301

**Ordering information:** Other designs available on request

Identification	slotted round nut DN	slotted round nut Ø
NMHAS DN10-20 GVA	10 - 20	38 - 54 mm
NMHAS DN25-50 GVA	25 - 50	63 - 92 mm
NMHAS DN65-100 GVA	65 - 100	112 - 148 mm


**Web:** <http://cat.hansa-flex.com/en/NMHASGVA>



## LM-DI PT

## PTFE gasket for use with foodstuffs

**Application:** Sealing ring for thread sockets for use with foodstuffs  
**Design:** flattened sealing ring on one side  
**Standard:** DIN 11851  
**Material:** PTFE  
**Temp. range:** from -200 °C to 260 °C



**Ordering information:** Other designs available on request

Identification	DN	D	d	S
		mm	mm	mm
LM-DI 010 PT	10	20,0	12,0	4,5
LM-DI 013 PT	13	26,0	18,0	4,5
LM-DI 020 PT	20	33,0	23,0	4,5
LM-DI 025 PT	25	40,0	30,0	5,0
LM-DI 032 PT	32	46,0	36,0	5,0
LM-DI 040 PT	40	52,0	42,0	5,0
LM-DI 050 PT	50	64,0	54,0	5,0
LM-DI 065 PT	65	81,0	71,0	5,0
LM-DI 080 PT	80	95,0	85,0	5,0
LM-DI 100 PT	100	114,0	104,0	6,0

**Web:** <http://cat.hansa-flex.com/en/LMDIPT>


**Product versions:**

LM-DI NBR - NBR gasket for use with foodstuffs, NBR

## LM-DI NBR

## NBR gasket for use with foodstuffs

**Application:** Sealing ring for thread sockets for use with foodstuffs  
**Design:** flattened sealing ring on one side  
**Standard:** DIN 11851  
**Material:** NBR  
**Temp. range:** from -25 °C to 110 °C




**Ordering information:** Other designs available on request

Identification	DN	D	d	S
		mm	mm	mm
LM-DI 010 NBR	10	20,0	12,0	4,5
LM-DI 013 NBR	13	26,0	18,0	4,5
LM-DI 020 NBR	20	33,0	23,0	4,5
LM-DI 025 NBR	25	40,0	30,0	5,0
LM-DI 032 NBR	32	46,0	36,0	5,0
LM-DI 040 NBR	40	52,0	42,0	5,0
LM-DI 050 NBR	50	64,0	54,0	5,0
LM-DI 065 NBR	65	81,0	71,0	5,0
LM-DI 080 NBR	80	95,0	85,0	5,0
LM-DI 100 NBR	100	114,0	104,0	6,0

**Web:** <http://cat.hansa-flex.com/en/LMDINBR>

**Product versions:**

LM-DI PT - PTFE gasket for use with foodstuffs, PTFE

**WA LF PN6****Connector ... LF, PN 6, steel**

**Application:** Connection fitting for metal hoses  
**Connection 1:** plain collar with loose flange, at pressure rating PN6  
**Sealing form 1:** flat sealing  
**Standard:** DIN 2641, DIN EN 1092-1  
**Application:** soldered variant temperature resistant up to 200 °C, welded variant in stainless steel temperature resistant up to 550 °C  
**Construction:** straight  
**Material:** Stainless steel pipe socket, Steel collar, Steel loose flange


**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	D mm	d1 mm	K mm	L mm
WA 010 LF PN6	10	6	75	35	50	11
WA 013 LF PN6	13	6	80	40	55	11
WA 020 LF PN6	20	6	90	50	65	11
WA 025 LF PN6	25	6	100	60	75	11
WA 032 LF PN6	32	6	120	70	90	14
WA 040 LF PN6	40	6	130	80	100	14
WA 050 LF PN6	50	6	140	90	110	14
WA 065 LF PN6	65	6	160	110	130	14
WA 080 LF PN6	80	6	190	128	150	18
WA 100 LF PN6	100	6	210	148	170	18
WA 125 LF PN6	125	6	240	178	200	18
WA 150 LF PN6	150	6	265	202	225	18

**Web:** <http://cat.hansa-flex.com/en/WALFPN6>

**Product versions:**

**WA LF PN6 VA** - Connector ... LF, PN 6, VA, Stainless steel pipe socket

**WA LF PN6 VA****Connector ... LF, PN 6, VA**

**Application:** Connection fitting for metal hoses  
**Connection 1:** plain collar with loose flange, at pressure rating PN6  
**Sealing form 1:** flat sealing  
**Standard:** DIN 2641, DIN EN 1092-1  
**Application:** soldered variant temperature resistant up to 200 °C, welded variant in stainless steel temperature resistant up to 550 °C  
**Construction:** straight  
**Material:** Stainless steel pipe socket, Stainless steel collar, Stainless steel loose flange

**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	D mm	d1 mm	K mm	L mm
WA 010 LF PN6 VA	10	6	75	35	50	11
WA 013 LF PN6 VA	13	6	80	40	55	11
WA 020 LF PN6 VA	20	6	90	50	65	11
WA 025 LF PN6 VA	25	6	100	60	75	11
WA 032 LF PN6 VA	32	6	120	70	90	14
WA 040 LF PN6 VA	40	6	130	80	100	14
WA 050 LF PN6 VA	50	6	140	90	110	14
WA 065 LF PN6 VA	65	6	160	110	130	14
WA 080 LF PN6 VA	80	6	190	128	150	18
WA 100 LF PN6 VA	100	6	210	148	170	18
WA 125 LF PN6 VA	125	6	240	178	200	18
WA 150 LF PN6 VA	150	6	265	202	225	18

**Web:** <http://cat.hansa-flex.com/en/WALFPN6VA>


**Product versions:**

**WA LF PN6** - Connector ... LF, PN 6, steel, Stainless steel pipe socket

## WA LF PN10

## Connector ... LF, PN 10, steel

**Application:** Connection fitting for metal hoses  
**Connection 1:** Short stub end with loose flange, at pressure rating PN10  
**Sealing form 1:** flat sealing  
**Standard:** DIN 2673, DIN EN 1092-1  
**Application:** soldered variant temperature resistant up to 200 °C, welded variant in stainless steel temperature resistant up to 550 °C  
**Construction:** straight  
**Material:** Steel collar, Steel loose flange



**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	D	d1	K	L
			mm	mm	mm	mm
WA 010 LF PN10	10	10	90	40	60	14
WA 013 LF PN10	13	10	95	45	65	14
WA 020 LF PN10	20	10	105	58	75	14
WA 025 LF PN10	25	10	115	68	85	14
WA 032 LF PN10	32	10	140	78	100	18
WA 040 LF PN10	40	10	150	88	110	18
WA 050 LF PN10	50	10	165	102	125	18
WA 065 LF PN10	65	10	185	122	145	18
WA 080 LF PN10	80	10	200	138	160	18
WA 100 LF PN10	100	10	220	158	180	18
WA 125 LF PN10	125	10	250	188	210	18
WA 150 LF PN10	150	10	285	212	240	22

**Web:** <http://cat.hansa-flex.com/en/WALFPN10>


**Product versions:**

WA LF PN10 VA - Connector ... LF, PN 10, VA, Stainless steel collar

## WA LF PN10 VA

## Connector ... LF, PN 10, VA

**Application:** Connection fitting for metal hoses  
**Connection 1:** Short stub end with loose flange, at pressure rating PN10  
**Sealing form 1:** flat sealing  
**Standard:** DIN 2673, DIN EN 1092-1  
**Application:** soldered variant temperature resistant up to 200 °C, welded variant in stainless steel temperature resistant up to 550 °C  
**Construction:** straight  
**Material:** Stainless steel collar, Stainless steel loose flange




**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	D	d1	K	L
			mm	mm	mm	mm
WA 010 LF PN10 VA	10	10	90	40	60	14
WA 013 LF PN10 VA	13	10	95	45	65	14
WA 020 LF PN10 VA	20	10	105	58	75	14
WA 025 LF PN10 VA	25	10	115	68	85	14
WA 032 LF PN10 VA	32	10	140	78	100	18
WA 040 LF PN10 VA	40	10	150	88	110	18
WA 050 LF PN10 VA	50	10	165	102	125	18
WA 065 LF PN10 VA	65	10	185	122	145	18
WA 080 LF PN10 VA	80	10	200	138	160	18
WA 100 LF PN10 VA	100	10	220	158	180	18
WA 125 LF PN10 VA	125	10	250	188	210	18
WA 150 LF PN10 VA	150	10	285	212	240	22

**Web:** <http://cat.hansa-flex.com/en/WALFPN10VA>

**Product versions:**

WA LF PN10 - Connector ... LF, PN 10, steel, Steel collar

**WA LF PN16****Connector ... LF, PN 16, steel**

**Application:** Connection fitting for metal hoses  
**Connection 1:** Short stub end with loose flange, at pressure rating PN16  
**Sealing form 1:** flat sealing  
**Standard:** DIN 2674, DIN EN 1092-1  
**Application:** soldered variant temperature resistant up to 200 °C, welded variant in stainless steel temperature resistant up to 550 °C  
**Construction:** straight  
**Material:** Steel collar, Steel loose flange


**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	D mm	d1 mm	K mm	L mm
WA 010 LF PN16	10	16	90	40	60	14
WA 013 LF PN16	13	16	95	45	65	14
WA 020 LF PN16	20	16	105	58	75	14
WA 025 LF PN16	25	16	115	68	85	14
WA 032 LF PN16	32	16	140	78	100	18
WA 040 LF PN16	40	16	150	88	110	18
WA 050 LF PN16	50	16	165	102	125	18
WA 065 LF PN16	65	16	185	122	145	18
WA 080 LF PN16	80	16	200	138	160	18
WA 100 LF PN16	100	16	220	158	180	18
WA 125 LF PN16	125	16	250	188	210	18
WA 150 LF PN16	150	16	285	212	240	22

**Web:** <http://cat.hansa-flex.com/en/WALFPN16>

**Product versions:**

**WA LF PN16 VA** - Connector ... LF, PN 16, VA, Stainless steel collar

**WA LF PN16 VA****Connector ... LF, PN 16, VA**

**Application:** Connection fitting for metal hoses  
**Connection 1:** Short stub end with loose flange, at pressure rating PN16  
**Sealing form 1:** flat sealing  
**Standard:** DIN 2674, DIN EN 1092-1  
**Application:** soldered variant temperature resistant up to 200 °C, welded variant in stainless steel temperature resistant up to 550 °C  
**Construction:** straight  
**Material:** Stainless steel collar, Stainless steel loose flange

**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	D mm	d1 mm	K mm	L mm
WA 010 LF PN16 VA	10	16	90	40	60	14
WA 013 LF PN16 VA	13	16	95	45	65	14
WA 020 LF PN16 VA	20	16	105	58	75	14
WA 025 LF PN16 VA	25	16	115	68	85	14
WA 032 LF PN16 VA	32	16	140	78	100	18
WA 040 LF PN16 VA	40	16	150	88	110	18
WA 050 LF PN16 VA	50	16	165	102	125	18
WA 065 LF PN16 VA	65	16	185	122	145	18
WA 080 LF PN16 VA	80	16	200	138	160	18
WA 100 LF PN16 VA	100	16	220	158	180	18
WA 125 LF PN16 VA	125	16	250	188	210	18
WA 150 LF PN16 VA	150	16	285	212	240	22

**Web:** <http://cat.hansa-flex.com/en/WALFPN16VA>


**Product versions:**

**WA LF PN16** - Connector ... LF, PN 16, steel, Steel collar

## WA LF PN40

## Connector ... LF, PN 40, steel

**Application:** Connection fitting for metal hoses  
**Connection 1:** plain collar with loose flange, at pressure rating PN40  
**Sealing form 1:** flat sealing  
**Standard:** DIN 2656, DIN EN 1092-1  
**Application:** soldered variant temperature resistant up to 200 °C,  
welded variant in stainless steel temperature resistant up to 550 °C  
**Construction:** straight  
**Material:** Stainless steel pipe socket, Steel collar, Steel loose flange



**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	D	d1	K	L
			mm	mm	mm	mm
WA 010 LF PN40	10	40	90	40	60	14
WA 013 LF PN40	13	40	95	45	65	14
WA 020 LF PN40	20	40	105	58	75	14
WA 025 LF PN40	25	40	115	68	85	14
WA 032 LF PN40	32	40	140	78	100	18
WA 040 LF PN40	40	40	150	88	110	18
WA 050 LF PN40	50	40	165	102	125	18
WA 065 LF PN40	65	40	185	122	145	18
WA 080 LF PN40	80	40	200	138	160	18
WA 100 LF PN40	100	40	235	162	190	22
WA 125 LF PN40	125	40	270	188	220	26
WA 150 LF PN40	150	40	300	218	250	26

**Web:** <http://cat.hansa-flex.com/en/WALFPN40>


**Product versions:**

**WA LF PN40 VA** - Connector ... LF, PN 40, VA, Stainless steel pipe socket

## WA LF PN40 VA

## Connector ... LF, PN 40, VA

**Application:** Connection fitting for metal hoses  
**Connection 1:** plain collar with loose flange, at pressure rating PN40  
**Sealing form 1:** flat sealing  
**Standard:** DIN 2656, DIN EN 1092-1  
**Application:** soldered variant temperature resistant up to 200 °C,  
welded variant in stainless steel temperature resistant up to 550 °C  
**Construction:** straight  
**Material:** Stainless steel pipe socket, Stainless steel collar, Stainless steel loose flange




**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	D	d1	K	L
			mm	mm	mm	mm
WA 010 LF PN40 VA	10	40	90	40	60	14
WA 013 LF PN40 VA	13	40	95	45	65	14
WA 020 LF PN40 VA	20	40	105	58	75	14
WA 025 LF PN40 VA	25	40	115	68	85	14
WA 032 LF PN40 VA	32	40	140	78	100	18
WA 040 LF PN40 VA	40	40	150	88	110	18
WA 050 LF PN40 VA	50	40	165	102	125	18
WA 065 LF PN40 VA	65	40	185	122	145	18
WA 080 LF PN40 VA	80	40	200	138	160	18
WA 100 LF PN40 VA	100	40	235	162	190	22
WA 125 LF PN40 VA	125	40	270	188	220	26
WA 150 LF PN40 VA	150	40	300	218	250	26

**Web:** <http://cat.hansa-flex.com/en/WALFPN40VA>

**Product versions:**

**WA LF PN40** - Connector ... LF, PN 40, steel, Stainless steel pipe socket

**WA LB PN6****Connector ... LB, PN 6, steel**

- Application:** Connection fitting for metal hoses  
**Connection 1:** Welding neck flange with loose flange, at pressure rating PN6  
**Sealing form 1:** flat sealing  
**Standard:** DIN 2641, DIN EN 1092-1  
**Application:** soldered variant temperature resistant up to 200 °C, welded variant in stainless steel temperature resistant up to 550 °C  
**Construction:** straight  
**Material:** Stainless steel formed flange, Steel loose flange


**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	D mm	d1 mm	K mm	L mm
WA 010 LB PN6	10	6	75	35	50	11
WA 013 LB PN6	13	6	80	40	55	11
WA 020 LB PN6	20	6	90	50	65	11
WA 025 LB PN6	25	6	100	60	75	11
WA 032 LB PN6	32	6	120	70	90	14
WA 040 LB PN6	40	6	130	80	100	14
WA 050 LB PN6	50	6	140	90	110	14
WA 065 LB PN6	65	6	160	110	130	14
WA 080 LB PN6	80	6	190	128	150	18
WA 100 LB PN6	100	6	210	148	170	18
WA 125 LB PN6	125	6	240	178	200	18
WA 150 LB PN6	150	6	265	202	225	18

**Web:** <http://cat.hansa-flex.com/en/WALBPN6>

**Product versions:**

**WA LB PN6 VA** - Connector ... LB, PN 6, VA, Stainless steel formed flange

**WA LB PN6 VA****Connector ... LB, PN 6, VA**

- Application:** Connection fitting for metal hoses  
**Connection 1:** Welding neck flange with loose flange, at pressure rating PN6  
**Sealing form 1:** flat sealing  
**Standard:** DIN 2641, DIN EN 1092-1  
**Application:** soldered variant temperature resistant up to 200 °C, welded variant in stainless steel temperature resistant up to 550 °C  
**Construction:** straight  
**Material:** Stainless steel formed flange, Stainless steel loose flange

**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	D mm	d1 mm	K mm	L mm
WA 010 LB PN6 VA	10	6	75	35	50	11
WA 013 LB PN6 VA	13	6	80	40	55	11
WA 020 LB PN6 VA	20	6	90	50	65	11
WA 025 LB PN6 VA	25	6	100	60	75	11
WA 032 LB PN6 VA	32	6	120	70	90	14
WA 040 LB PN6 VA	40	6	130	80	100	14
WA 050 LB PN6 VA	50	6	140	90	110	14
WA 065 LB PN6 VA	65	6	160	110	130	14
WA 080 LB PN6 VA	80	6	190	128	150	18
WA 100 LB PN6 VA	100	6	210	148	170	18
WA 125 LB PN6 VA	125	6	240	178	200	18
WA 150 LB PN6 VA	150	6	265	202	225	18

**Web:** <http://cat.hansa-flex.com/en/WALBPN6VA>


**Product versions:**

**WA LB PN6** - Connector ... LB, PN 6, steel, Stainless steel formed flange

## WA LB PN10

## Connector ... LB, PN 10, steel

**Application:** Connection fitting for metal hoses  
**Connection 1:** Welding neck flange with loose flange, at pressure rating PN10  
**Sealing form 1:** flat sealing  
**Standard:** DIN 2642, DIN EN 1092-1  
**Application:** soldered variant temperature resistant up to 200 °C, welded variant in stainless steel temperature resistant up to 550 °C  
**Construction:** straight  
**Material:** Stainless steel formed flange, Steel loose flange



**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	D	d1	K	L
			mm	mm	mm	mm
WA 010 LB PN10	10	10	90	40	60	14
WA 013 LB PN10	13	10	95	45	65	14
WA 020 LB PN10	20	10	105	58	75	14
WA 025 LB PN10	25	10	115	68	85	14
WA 032 LB PN10	32	10	140	78	100	18
WA 040 LB PN10	40	10	150	88	110	18
WA 050 LB PN10	50	10	165	102	125	18
WA 065 LB PN10	65	10	185	122	145	18
WA 080 LB PN10	80	10	200	138	160	18
WA 100 LB PN10	100	10	220	158	180	18
WA 125 LB PN10	125	10	250	188	210	18
WA 150 LB PN10	150	10	285	212	240	22

**Web:** <http://cat.hansa-flex.com/en/WALBPN10>


**Product versions:**

**WA LB PN10 VA** - Connector ... LB, PN 10, VA, Stainless steel formed flange

## WA LB PN10 VA

## Connector ... LB, PN 10, VA

**Application:** Connection fitting for metal hoses  
**Connection 1:** Welding neck flange with loose flange, at pressure rating PN10  
**Sealing form 1:** flat sealing  
**Standard:** DIN 2642, DIN EN 1092-1  
**Application:** soldered variant temperature resistant up to 200 °C, welded variant in stainless steel temperature resistant up to 550 °C  
**Construction:** straight  
**Material:** Stainless steel formed flange, Stainless steel loose flange



**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	D	d1	K	L
			mm	mm	mm	mm
WA 010 LB PN10 VA	10	10	90	40	60	14
WA 013 LB PN10 VA	13	10	95	45	65	14
WA 020 LB PN10 VA	20	10	105	58	75	14
WA 025 LB PN10 VA	25	10	115	68	85	14
WA 032 LB PN10 VA	32	10	140	78	100	18
WA 040 LB PN10 VA	40	10	150	88	110	18
WA 050 LB PN10 VA	50	10	165	102	125	18
WA 065 LB PN10 VA	65	10	185	122	145	18
WA 080 LB PN10 VA	80	10	200	138	160	18
WA 100 LB PN10 VA	100	10	220	158	180	18
WA 125 LB PN10 VA	125	10	250	188	210	18
WA 150 LB PN10 VA	150	10	285	212	240	22


**Web:** <http://cat.hansa-flex.com/en/WALBPN10VA>

**Product versions:**

**WA LB PN10** - Connector ... LB, PN 10, steel, Stainless steel formed flange

## FD C4400

### Flat seal



Technical values for 2 mm thickness:

- compressibility ASTM F36 A = 11%
- resilience ASTM F36 A = 55 %
- creep resistance under load DIN 52913 = 25 MPA (50 MPA, 16 h / 300 °C)
- creep resistance under load BS 7531 = 23 MPA
- Thinning at 23 °C = 10 %
- Thinning at 300 °C = 22 %
- leak tightness according to DIN 3535/6 = 0.2 ml/min
- anti-corrosion aptitude (chloride content soluble) = 150 ppm
- Thickness change according to ASTM F 146 (oil JRM 903: 5 h / 23 °C) = 3 %
- Thickness change according to ASTM F 146 (fuel B: 5 h / 23 °C) = 5 %
- density = 1.6 g/cm<sup>3</sup>

- Design:** Universal high-pressure seal for a wide range of sectors
- Application:** food processing, drinking water supply, Chemical industry
- Construction type:** ultra high-performance standard
- Approval:** DIN-DVGW approval, BAM-, HTB approved, KTW recommended, WRC approval
- Media:** Oil, Water, Steam, Gases, Saline solutions, Fuels, Alcohols, organic and inorganic acids, hydrocarbons, Lubricants, Refrigerants
- Material:** aramid fibres, bonded with NBR


**Note:** Tolerances:  
 longitudinal dimension according to DIN 7715 - Part 5 P2,  
 thickness according to DIN 7715 - Part 5 P3,  
 surface seals according to DIN 2690 are only standardized to PN 40 bar

Identification	D mm	d mm	S mm	Identification	D mm	d mm	S mm
FD 15-11-1 C4400	15,0	11,00	1,00	FD 190-125-3 C4400	190,0	125,00	3,00
FD 41-33-2 C4400	41,0	33,20	3,00	FD 220-150-3 C4400	220,0	150,00	3,00
FD 55-41-1.5 C4400	55,0	41,00	1,50	FD 270-200-3 C4400	270,0	200,00	3,00
FD 60-20-3 C4400	60,0	20,00	3,00	FD 280-162-2 C4400	280,0	162,00	2,00
FD 62-45-2 C4400	62,0	45,00	2,00	FD 310-295-0.5 C44	310,0	295,00	0,50
FD 70-45-3 C4400	70,0	45,00	3,00	FD 310-295-0.5 C4400	310,0	295,00	0,50
FD 77-60-2 C4400	77,0	60,00	2,00	FD 320-250-3 C4400	320,0	250,00	3,00
FD 82-66-1 C4400	82,0	66,00	3,00	FD 380-300-3 C4400	380,0	300,00	3,00
FD 85-70-0.5 C4400	85,0	70,00	0,50	FD 380-325-2 C4400	380,0	325,00	3,00
FD 90-40-3 C4400	90,0	40,00	3,00	FD 485-400-3 C4400	485,0	400,00	3,00
FD 100-50-3 C4400	100,0	50,00	3,00	FD 540-490-3 C4400	540,0	490,00	3,00
FD 105-65-3 C4400	105,0	65,00	3,00	FD 570-500-3 C4400	570,0	500,00	3,00
FD 110-75-2 C4400	110,0	75,00	2,00	FD 590-500-3 C4400	590,0	500,00	3,00
FD 110-85-3 C4400	110,0	85,00	3,00	FD 680-600-3 C4400	680,0	600,00	3,00
FD 140-121-1.5 C44	140,0	121,00	1,50	FD 800-670-3 C4400	800,0	670,00	3,00
FD 140-121-1.5 C4400	140,0	121,00	1,50	FD 1080-1010-3 C44	1080,0	1010,00	3,00
FD 152-115-2 C4400	152,0	115,00	2,00	FD 1080-1010-3 C4400	1080,0	1010,00	3,00

**Web:** <http://cat.hansa-flex.com/en/FDC4400>

## WA LV PN6

### Connector ... LV, PN 6, steel



- Application:** Connection fitting for metal hoses
- Connection 1:** Welding neck flange, at pressure rating PN6
- Sealing form 1:** flat sealing
- Standard:** DIN 2631, DIN EN 1092-1
- Application:** soldered variant temperature resistant up to 200 °C, welded variant in stainless steel temperature resistant up to 550 °C
- Construction:** straight
- Material:** Steel

**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	D mm	d1 mm	K mm	L mm
WA 010 LV PN6	10	6	75	35	50	11
WA 013 LV PN6	13	6	80	40	55	11
WA 020 LV PN6	20	6	90	50	65	11
WA 025 LV PN6	25	6	100	60	75	11
WA 032 LV PN6	32	6	120	70	90	14
WA 040 LV PN6	40	6	130	80	100	14
WA 050 LV PN6	50	6	140	90	110	14
WA 065 LV PN6	65	6	160	110	130	14
WA 080 LV PN6	80	6	190	128	150	18
WA 100 LV PN6	100	6	210	148	170	18



(Continued)

WA LV PN6

Connector ... LV, PN 6, steel


Identification	DN	PN (bar)	D mm	d1 mm	K mm	L mm
WA 125 LV PN6	125	6	240	178	200	18
WA 150 LV PN6	150	6	265	202	225	18

**Web:** <http://cat.hansa-flex.com/en/WALVPN6>**Product versions:****WA LV PN6 VA** - Connector ... LV, PN 6, VA, Stainless steel

WA LV PN6 VA



Connector ... LV, PN 6, VA

**Application:** Connection fitting for metal hoses  
**Connection 1:** Welding neck flange, at pressure rating PN6  
**Sealing form 1:** flat sealing  
**Standard:** DIN 2631, DIN EN 1092-1  
**Application:** soldered variant temperature resistant up to 200 °C,  
welded variant in stainless steel temperature resistant up to 550 °C  
**Construction:** straight  
**Material:** Stainless steel

**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	D mm	d1 mm	K mm	L mm
WA 010 LV PN6 VA	10	6	75	35	50	11
WA 013 LV PN6 VA	13	6	80	40	55	11
WA 020 LV PN6 VA	20	6	90	50	65	11
WA 025 LV PN6 VA	25	6	100	60	75	11
WA 032 LV PN6 VA	32	6	120	70	90	14
WA 040 LV PN6 VA	40	6	130	80	100	14
WA 050 LV PN6 VA	50	6	140	90	110	14
WA 065 LV PN6 VA	65	6	160	110	130	14
WA 080 LV PN6 VA	80	6	190	128	150	18
WA 100 LV PN6 VA	100	6	210	148	170	18
WA 125 LV PN6 VA	125	6	240	178	200	18
WA 150 LV PN6 VA	150	6	265	202	225	18

**Web:** <http://cat.hansa-flex.com/en/WALVPN6VA>**Product versions:****WA LV PN6** - Connector ... LV, PN 6, steel, Steel

**WA LV PN16****Connector ... LV, PN 16, steel**

<b>Application:</b>	Connection fitting for metal hoses
<b>Connection 1:</b>	Welding neck flange, at pressure rating PN16
<b>Sealing form 1:</b>	flat sealing
<b>Standard:</b>	DIN 2633, DIN EN 1092-1
<b>Application:</b>	soldered variant temperature resistant up to 200 °C, welded variant in stainless steel temperature resistant up to 550 °C
<b>Construction:</b>	straight
<b>Material:</b>	Steel


**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	D mm	d1 mm	K mm	L mm
WA 010 LV PN16	10	16	90	40	60	14
WA 013 LV PN16	13	16	95	45	65	14
WA 020 LV PN16	20	16	105	58	75	14
WA 025 LV PN16	25	16	115	68	85	14
WA 032 LV PN16	32	16	140	78	100	18
WA 040 LV PN16	40	16	150	88	110	18
WA 050 LV PN16	50	16	165	102	125	18
WA 065 LV PN16	65	16	185	122	145	18
WA 080 LV PN16	80	16	200	138	160	18
WA 100 LV PN16	100	16	220	158	180	18
WA 125 LV PN16	125	16	250	188	210	18
WA 150 LV PN16	150	16	285	212	240	22

**Web:** <http://cat.hansa-flex.com/en/WALVFN16>

**Product versions:**

**WA LV PN16 VA** - Connector ... LV, PN 16, VA, Stainless steel

**WA LV PN16 VA****Connector ... LV, PN 16, VA**

<b>Application:</b>	Connection fitting for metal hoses
<b>Connection 1:</b>	Welding neck flange, at pressure rating PN16
<b>Sealing form 1:</b>	flat sealing
<b>Standard:</b>	DIN 2633, DIN EN 1092-1
<b>Application:</b>	soldered variant temperature resistant up to 200 °C, welded variant in stainless steel temperature resistant up to 550 °C
<b>Construction:</b>	straight
<b>Material:</b>	Stainless steel

**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	D mm	d1 mm	K mm	L mm
WA 010 LV PN16 VA	10	16	90	40	60	14
WA 013 LV PN16 VA	13	16	95	45	65	14
WA 020 LV PN16 VA	20	16	105	58	75	14
WA 025 LV PN16 VA	25	16	115	68	85	14
WA 032 LV PN16 VA	32	16	140	78	100	18
WA 040 LV PN16 VA	40	16	150	88	110	18
WA 050 LV PN16 VA	50	16	165	102	125	18
WA 065 LV PN16 VA	65	16	185	122	145	18
WA 080 LV PN16 VA	80	16	200	138	160	18
WA 100 LV PN16 VA	100	16	220	158	180	18
WA 125 LV PN16 VA	125	16	250	188	210	18
WA 150 LV PN16 VA	150	16	285	212	240	22

**Web:** <http://cat.hansa-flex.com/en/WALVFN16VA>


**Product versions:**

**WA LV PN16** - Connector ... LV, PN 16, steel, Steel

## WA LV PN40

## Connector ... LV, PN 40, steel

**Application:** Connection fitting for metal hoses  
**Connection 1:** Welding neck flange, at pressure rating PN40  
**Sealing form 1:** flat sealing  
**Standard:** DIN 2635, DIN EN 1092-1  
**Application:** soldered variant temperature resistant up to 200 °C,  
welded variant in stainless steel temperature resistant up to 550 °C  
**Construction:** straight  
**Material:** Steel



**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	D	d1	K	L
			mm	mm	mm	mm
WA 010 LV PN40	10	40	90	40	60	14
WA 013 LV PN40	13	40	95	45	65	14
WA 020 LV PN40	20	40	105	58	75	14
WA 025 LV PN40	25	40	115	68	85	14
WA 032 LV PN40	32	40	140	78	100	18
WA 040 LV PN40	40	40	150	88	110	18
WA 050 LV PN40	50	40	165	102	125	18
WA 065 LV PN40	65	40	185	122	145	18
WA 080 LV PN40	80	40	200	138	160	18
WA 100 LV PN40	100	40	235	162	190	22
WA 125 LV PN40	125	40	270	188	220	26
WA 150 LV PN40	150	40	300	218	250	26

**Web:** <http://cat.hansa-flex.com/en/WALVPN40>


**Product versions:**

**WA LV PN40 VA** - Connector ... LV, PN 40, VA, Stainless steel

## WA LV PN40 VA

## Connector ... LV, PN 40, VA

**Application:** Connection fitting for metal hoses  
**Connection 1:** Welding neck flange, at pressure rating PN40  
**Sealing form 1:** flat sealing  
**Standard:** DIN 2635, DIN EN 1092-1  
**Application:** soldered variant temperature resistant up to 200 °C,  
welded variant in stainless steel temperature resistant up to 550 °C  
**Construction:** straight  
**Material:** Stainless steel



**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	D	d1	K	L
			mm	mm	mm	mm
WA 010 LV PN40 VA	10	40	90	40	60	14
WA 013 LV PN40 VA	13	40	95	45	65	14
WA 020 LV PN40 VA	20	40	105	58	75	14
WA 025 LV PN40 VA	25	40	115	68	85	14
WA 032 LV PN40 VA	32	40	140	78	100	18
WA 040 LV PN40 VA	40	40	150	88	110	18
WA 050 LV PN40 VA	50	40	165	102	125	18
WA 065 LV PN40 VA	65	40	185	122	145	18
WA 080 LV PN40 VA	80	40	200	138	160	18
WA 100 LV PN40 VA	100	40	235	162	190	22
WA 125 LV PN40 VA	125	40	270	188	220	26
WA 150 LV PN40 VA	150	40	300	218	250	26


**Web:** <http://cat.hansa-flex.com/en/WALVPN40VA>

**Product versions:**

**WA LV PN40** - Connector ... LV, PN 40, steel, Steel

**FD C4400**

**Flat seal**



Technical values for 2 mm thickness:

- compressibility ASTM F36 A = 11%
- resilience ASTM F36 A = 55 %
- creep resistance under load DIN 52913 = 25 MPA (50 MPA, 16 h / 300 °C)
- creep resistance under load BS 7531 = 23 MPA
- Thinning at 23 °C = 10 %
- Thinning at 300 °C = 22 %
- leak tightness according to DIN 3535/6 = 0.2 ml/min
- anti-corrosion aptitude (chloride content soluble) = 150 ppm
- Thickness change according to ASTM F 146 (oil JRM 903: 5 h / 23 °C) = 3 %
- Thickness change according to ASTM F 146 (fuel B: 5 h / 23 °C) = 5 %
- density = 1.6 g/cm<sup>3</sup>

**Design:** Universal high-pressure seal for a wide range of sectors

**Construction type:** ultra high-performance standard

**Approval:** DIN-DVGW approval, BAM-, HTB approved, KTW recommended, WRC approval

**Media:** Oil, Water, Steam, Gases, Saline solutions, Fuels, Alcohols, organic and inorganic acids, hydrocarbons, Lubricants, Refrigerants

**Material:** aramid fibres, bonded with NBR

**Application:** food processing, drinking water supply, Chemical industry


**Note:** Tolerances:  
 longitudinal dimension according to DIN 7715 - Part 5 P2,  
 thickness according to DIN 7715 - Part 5 P3,  
 surface seals according to DIN 2690 are only standardized to PN 40 bar

Identification	D mm	d mm	S mm	Identification	D mm	d mm	S mm
FD 15-11-1 C4400	15,0	11,00	1,00	FD 190-125-3 C4400	190,0	125,00	3,00
FD 41-33-2 C4400	41,0	33,20	3,00	FD 220-150-3 C4400	220,0	150,00	3,00
FD 55-41-1.5 C4400	55,0	41,00	1,50	FD 270-200-3 C4400	270,0	200,00	3,00
FD 60-20-3 C4400	60,0	20,00	3,00	FD 280-162-2 C4400	280,0	162,00	2,00
FD 62-45-2 C4400	62,0	45,00	2,00	FD 310-295-0.5 C44	310,0	295,00	0,50
FD 70-45-3 C4400	70,0	45,00	3,00	FD 310-295-0.5 C4400	310,0	295,00	0,50
FD 77-60-2 C4400	77,0	60,00	2,00	FD 320-250-3 C4400	320,0	250,00	3,00
FD 82-66-1 C4400	82,0	66,00	3,00	FD 380-300-3 C4400	380,0	300,00	3,00
FD 85-70-0.5 C4400	85,0	70,00	0,50	FD 380-325-2 C4400	380,0	325,00	3,00
FD 90-40-3 C4400	90,0	40,00	3,00	FD 485-400-3 C4400	485,0	400,00	3,00
FD 100-50-3 C4400	100,0	50,00	3,00	FD 540-490-3 C4400	540,0	490,00	3,00
FD 105-65-3 C4400	105,0	65,00	3,00	FD 570-500-3 C4400	570,0	500,00	3,00
FD 110-75-2 C4400	110,0	75,00	2,00	FD 590-500-3 C4400	590,0	500,00	3,00
FD 110-85-3 C4400	110,0	85,00	3,00	FD 680-600-3 C4400	680,0	600,00	3,00
FD 140-121-1.5 C44	140,0	121,00	1,50	FD 800-670-3 C4400	800,0	670,00	3,00
FD 140-121-1.5 C4400	140,0	121,00	1,50	FD 1080-1010-3 C44	1080,0	1010,00	3,00
FD 152-115-2 C4400	152,0	115,00	2,00	FD 1080-1010-3 C4400	1080,0	1010,00	3,00

**Web:** <http://cat.hansa-flex.com/en/FDC4400>

**WA KF VA**

**Connector ... KF, VA**



- Application:** Vacuum systems that function in a rough, fine and high vacuum, (10–9 mbar depending on the seals), for positive pressure applications up to 2.5 bar
- Application:** Connection fitting for metal hoses
- Connection 1:** Small flanges for vacuum technology
- Sealing form 1:** flat seal with O-ring .
- Material:** Stainless steel
- Standard:** DIN 28403, ISO 2861
- Construction:** straight

**Ordering information:** Other designs available on request


Identification	DN	D mm
WA 010 KF VA	10	30,0
WA 016 KF VA	16	30,0
WA 020 KF VA	20	40,0
WA 025 KF VA	25	40,0
WA 032 KF VA	32	55,0
WA 040 KF VA	40	55,0
WA 050 KF VA	50	75,0

**Web:** <http://cat.hansa-flex.com/en/WAKFVA>

## KF-DI

## O-ring, Aluminium/FKM (FPM)

**Application:** Sealing components for small flange connections  
**Design:** Aluminium centering ring with FKM (FPM) O-ring  
**Standard:** DIN 28403, ISO 2861  
**Material:** Aluminium eccentric ring, O-Ring: FKM (FPM)  
**Temp. range:** Aluminium from -156 °C to 150 °C, FKM (FPM) von -20 °C bis 200 °C



**Note:** Pressure range from 10–7 mbar to 2.5 bar

**Ordering information:** Other designs available on request


Identification	DN	D mm	d mm
KF-DI 010	10	12,0	10,0
KF-DI 016	16	17,0	16,0
KF-DI 020	20	22,0	20,0
KF-DI 025	25	26,0	25,0
KF-DI 032	32	34,0	32,0
KF-DI 040	40	41,0	40,0
KF-DI 050	50	52,0	50,0

**Web:** <http://cat.hansa-flex.com/en/KFDI>

## KLEMMSCHEL

## Clamp, Aluminium

**Application:** Clamping components for small flange connections  
**Design:** Clamp aluminium  
**Standard:** DIN 28403, ISO 2861  
**Material:** Aluminium  
**Temp. range:** Aluminium from -156 °C to 150 °C




**Note:** Pressure range from 10–7 mbar to 2.5 bar

**Ordering information:** Other designs available on request

Identification	Width mm	a mm	b mm	Ø d mm
KLEMMSCHEL 010/16	17,0	63,0	45,0	22,0
KLEMMSCHEL 020/25	17,0	73,0	52,0	32,0
KLEMMSCHEL 032/40	17,0	93,0	70,0	47,0
KLEMMSCHEL 050	22,0	114,0	95,0	62,0

**Web:** <http://cat.hansa-flex.com/en/KLEMMSCHEL>

**WA TRI VA****Connector ... TRI-Clamp connector, VA**

<b>Application:</b>	Connection fitting for metal hoses
<b>Application:</b>	Use in the food-, chemical and pharmaceutical areas
<b>Connection 1:</b>	Clamp socket
<b>Sealing form 1:</b>	O-ring seal
<b>Standard:</b>	DIN 32676
<b>Construction:</b>	straight
<b>Material:</b>	Stainless steel

**Note:** The permissible pressures are designed for temperatures from -10 °C to 140 °C when suitable brackets and sealing materials are used.

**Ordering information:** Other designs available on request

Identification	DN	PN (bar)	D mm
WA 008 TRI-25 VA	8	25	25,0
WA 010 TRI-34 VA	10	25	34,0
WA 013 TRI-25 VA	13	25	25,0
WA 013 TRI-34 VA	13	25	34,0
WA 020 TRI-34 VA	20	25	34,0
WA 025 TRI-50.5 VA	25	25	50,5
WA 032 TRI-50.5 VA	32	25	50,5
WA 040 TRI-50.5 VA	40	25	50,5
WA 050 TRI-64 VA	50	16	64,0
WA 050 TRI-77.5 VA	50	16	77,5
WA 065 TRI-91 VA	65	16	91,0
WA 080 TRI-106 VA	80	10	106,0
WA 100 TRI-119 VA	100	10	119,0
WA 125 TRI-155 VA	125	10	155,0
WA 150 TRI-183 VA	150	10	183,0

**Web:** <http://cat.hansa-flex.com/en/WATRIVA>

**DIRITRI-PTFE****Sealing ring for TRI-Clamp connector**

<b>Application:</b>	Sealing ring for TRI-Clamp connector
<b>Standard:</b>	DIN 32676
<b>Design:</b>	PTFE form sealing ring
<b>Material:</b>	PTFE
<b>Temp. range:</b>	from -200 °C to 260 °C

**Ordering information:** Other designs available on request


Identification	DN	D mm	d mm
DIRITRI DN10 D34 PT	10	34,0	10,2
DIRITRI DN15 D34 PT	15	34,0	16,2
DIRITRI DN20 D34 PT	20	34,0	20,2
DIRITRI DN25 D50.5 PT	25	50,5	26,2
DIRITRI DN32 D50.5 PT	32	50,5	32,2
DIRITRI DN40 D50.5 PT	40	50,5	38,2
DIRITRI DN50 D64 PT	50	64,0	50,2
DIRITRI DN65 D91 PT	65	91,0	66,2
DIRITRI DN80 D106 PT	80	106,0	81,2
DIRITRI DN100 D119 PT	100	119,0	100,2
DIRITRI DN125 D133 PT	125	155,0	125,2
DIRITRI DN150 D183 PT	150	183,0	150,2

**Web:** <http://cat.hansa-flex.com/en/DIRITRIPTFE>

## TRI KLAMMER VA

## Clamp bracket, VA


**Application:** Clamping components for TRI-clamp connections  
**Standard:** DIN 32676  
**Design:** Clamp stainless steel  
**Material:** Stainless steel



**Ordering information:** Other designs available on request

Identification	a mm	b mm	$\varnothing d$ mm
TRI KLAMMER 34 VA	63,0	45,0	34,0
TRI KLAMMER 50.5 VA	88,0	64,0	50,5
TRI KLAMMER 64 VA	105,0	77,0	64,0
TRI KLAMMER 91 VA	137,0	104,0	91,0
TRI KLAMMER 119 VA	168,0	132,0	119,0

**Web:** <http://cat.hansa-flex.com/en/TRIKLAMMERVA>



**Subject Index / Index**





<b>A</b>	
ABB S	25
Abrasion protection, Agraff, VA	42-43
Abrasion protection, round	43
Abrasion protection, round, VA	44
AFS	35
AFW	34
ASW	30
ATS 100	29
ATSE	33
ATWE	32-33
AVX	35-36
<b>C</b>	
Clamp bracket, VA	93
Clamp, Aluminium	91
Connector ... A, steel	48
Connector ... A, VA	48
Connector ... AB, steel	55
Connector ... AB, VA	55
Connector ... AFL, steel	49
Connector ... AFL, VA	49
Connector ... AFL-GAR, steel	67
Connector ... AFL-GAR, VA	68
Connector ... AFL-SA, steel	76
Connector ... AFL-SA, VA	77
Connector ... AFL-VR, steel	72
Connector ... AFL-VR, VA	73
Connector ... AFL-VRK, steel	71
Connector ... AFL-VRK, VA	72
Connector ... AFS, steel	52
Connector ... AFS, VA	52
Connector ... AJ, steel	62
Connector ... AJ, VA	62
Connector ... AOL, steel	50
Connector ... AOL, VA	50
Connector ... AOS, steel	53
Connector ... AOS, VA	53
Connector ... AR, steel	57
Connector ... AR, VA	57
Connector ... FA, steel	66
Connector ... FA, VA	67
Connector ... FL, copper	65
Connector ... FL, steel	64
Connector ... FL, VA	64
Connector ... FS, steel	65
Connector ... FS, VA	66
Connector ... HB, steel	56
Connector ... HB, VA	56
Connector ... HJ, steel	63
Connector ... HJ, VA	63
Connector ... HL, steel	51
Connector ... HL, VA	51
Connector ... HN, malleable cast iron	61
Connector ... HN, VA	61
Connector ... HR, steel	58
Connector ... HR, VA	58
Connector ... HS, steel	54
Connector ... HS, VA	54
Connector ... IR, malleable cast iron	59
Connector ... IR, red bronze	60
Connector ... IR, steel	60
Connector ... IR, VA	59
Connector ... KF, VA	90
Connector ... LB, PN 10, steel	85
Connector ... LB, PN 10, VA	85
Connector ... LB, PN 6, steel	84
Connector ... LB, PN 6, VA	84
Connector ... LF, PN 10, steel	81
Connector ... LF, PN 10, VA	81
Connector ... LF, PN 16, steel	82
Connector ... LF, PN 16, VA	82
Connector ... LF, PN 40, steel	83
Connector ... LF, PN 40, VA	83
Connector ... LF, PN 6, steel	80
Connector ... LF, PN 6, VA	80
Connector ... LMA, VA	78
Connector ... LMH, VA	77
Connector ... LV, PN 16, steel	88
Connector ... LV, PN 16, VA	88
Connector ... LV, PN 40, steel	89
Connector ... LV, PN 40, VA	89
Connector ... LV, PN 6, steel	86-87
Connector ... LV, PN 6, VA	87
Connector ... TRI-Clamp connector, VA	92
Connector ... VB, malleable cast iron	68
Connector ... VB, red bronze	69
Connector ... VB, VA	69
Connector ... VBF, malleable cast iron	70
Connector ... VBF, red bronze	71
Connector ... VBF, VA	70
Connector ... VC, malleable cast iron	73
Connector ... VC, red bronze	74
Connector ... VC, VA	74
Connector ... VCF, malleable cast iron	75
Connector ... VCF, red bronze	76
Connector ... VCF, VA	75
Coolant hose	37-38
<b>D</b>	
DCA S	26
DCB S	27
DCO S	26
DIRITRI-PTFE	92
<b>E</b>	
Elastomer expansion joints with loose-type flanges	39
<b>F</b>	
FBA	24
FBO	23
FBS	40
FBSB	41
FBSG	42
FBSS	41
Flat seal	86,90
FPCA	25
FPCO	24
<b>H</b>	
Heat protection hose, glass-fibre, silicone	41
Heat protection hose, silicate, silicone	41-42
<b>I</b>	
IBA	22
ICA	21-22
ICB	23
ICO	21
<b>K</b>	
KAX	36
KBA	20
KBO	20
KF-DI	91
KLEMMSCHEL	91
KOMP-LOS ELASTOMER	39
KOMP-LOS PTFE	40
KOMP-LOS VA	39
KOMP-SW VA	38
KTF 300	31
<b>L</b>	
LM-DI NBR	79
LM-DI PT	79
<b>M</b>	
Metal hose	20-27
<b>N</b>	
NBR gasket for use with foodstuffs	79
NI AG	37-38
NMHAS GVA	78

<b>O</b>			
O-ring, Aluminium/FKM (FPM)	91	WA HN VA	61
<b>P</b>		WA HR	58
PTFE corrugated hose	32-35	WA HR VA	58
PTFE expansion joints with loose-type flanges	40	WA HS	54
PTFE gasket for use with foodstuffs	79	WA HS VA	54
PTFE hose	31-32	WA IR	59
PTFE hose, smooth, 1 braiding	28	WA IR RG	60
PTFE hose, smooth, 1 braiding, heavy	30	WA IR ST	60
PTFE hose, smooth, 2 braidings	28-29	WA IR VA	59
PTFE NATUR	27	WA KF VA	90
PTFE smooth hose	29-30	WA LB PN10	85
PTFE-Tube	27	WA LB PN10 VA	85
<b>S</b>		WA LB PN6	84
Sealing ring for TRI-Clamp connector	92	WA LB PN6 VA	84
Silicate fabric heat protection hose	40	WA LF PN10	81
Slotted nut hook wrench with hinge, stainless steel	78	WA LF PN10 VA	81
SSA	42-43	WA LF PN16	82
SSR	43	WA LF PN16 VA	82
SSR VA	44	WA LF PN40	83
Stainless steel expansion joints with loose-type flanges	39	WA LF PN40 VA	83
Stainless steel expansion joints with welding ends	38	WA LF PN6	80
<b>T</b>		WA LF PN6 VA	80
TF 100	28	WA LMA VA	78
TF 100 S	30	WA LMH VA	77
TF 200	28-29	WA LV PN16	88
TFS	32	WA LV PN16 VA	88
TFW	31	WA LV PN40	89
TRI KLAMMER VA	93	WA LV PN40 VA	89
<b>U</b>		WA LV PN6	86-87
UPG G	37	WA LV PN6 VA	87
<b>W</b>		WA TRI VA	92
WA A	48	WA VB	68
WA A VA	48	WA VB RG	69
WA AB	55	WA VB VA	69
WA AB VA	55	WA VBF	70
WA AFL	49	WA VBF RG	71
WA AFL VA	49	WA VBF VA	70
WA AFL-GAR	67	WA VC	73
WA AFL-GAR VA	68	WA VC RG	74
WA AFL-SA	76	WA VC VA	74
WA AFL-SA VA	77	WA VCF	75
WA AFL-VR	72	WA VCF RG	76
WA AFL-VR VA	73	WA VCF VA	75
WA AFL-VRK	71	Wound hose for exhaust gases	35-36
WA AFL-VRK VA	72		
WA AFS	52		
WA AFS VA	52		
WA AJ	62		
WA AJ VA	62		
WA AOL	50		
WA AOL VA	50		
WA AOS	53		
WA AOS VA	53		
WA AR	57		
WA AR VA	57		
WA FA	66		
WA FA VA	67		
WA FL	64		
WA FL CU	65		
WA FL VA	64		
WA FS	65		
WA FS VA	66		
WA HB	56		
WA HB VA	56		
WA HJ	63		
WA HJ VA	63		
WA HL	51		
WA HL VA	51		
WA HN	61		








**Catalogue 1:  
Hose Technology**

 Hoses	
 Hose fittings	
 Couplings	
 Measuring equipment	



**Catalogue 2:  
Connection Technology**

 Pipe fittings ISO 8434-1	 Mounting technology
 Pipes	 Accessories and tools
 Adapters	
 Flanges	
 Ball valves	
 Measuring equipment	













**Catalogue 3:  
Industrial Technology**

 Hoses	 Compressed air technology
 Hose fittings	 Fluid service
 Couplings	 Accessories and tools
 Ball valves	
 Mounting technology	
 Water technology	



**Pneumatic Products**

 Hoses and accessories	 Cylinders and control valves
 Hose couplings	 Service units
 Screw fittings and connectors	 linear drive technology
 Pipeline system Infinity	 Vacuum technology
 Pressure and temperature measurement	
 Valves and shut-off devices	




**Hydraulic Components**

 Pumps	 Filters
 Hydraulic motors	 Measuring devices
 Valves	 700 bar
 Accumulators	 Cylinders
 Coolers	 Hydraulic power packs
 Hydraulic tanks	



**Seals and Sealing Equipment**

 Hydraulic seals	 Seal-profiles
 Pneumatic seals	 Datasheet
 Sets of seals and measuring instruments	
 Static seals	
 Flat seals	
 On-demand seal production	



HANSA-FLEX EN 5.000 10/2015

HANSA-FLEX AG  
Zum Panrepel 44  
28307 Bremen  
Tel.: +49 421 489070  
Fax: +49 421 4890748  
info@hansa-flex.com